
Operaprima with snoot

Indoor | Showcase lighting | IP40 | Class III | Dimmable



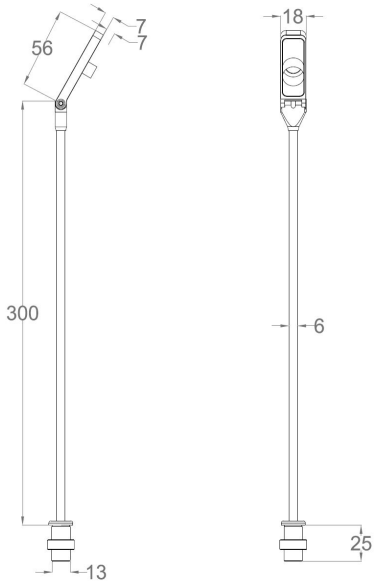

LIGHT SOURCE & OPTIC

Power
4W

Zoom Lens
60°

Beam Direction
Adjustable:
Tilting +/-170°, Rotating +/-355°
Symmetrical

Material
PMMA

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>90
3000K CRI>80/90
4000K CRI>80
5000K CRI>80

Lifetime (Ta 25°)
L_{90} >55.000 hrs

Source Flux (3000K CRI>90)
375 lm @ 350 mA

FIXTURE

Dimensions
60mm x 18 mm (head) x Hmax 300mm

Material
Aluminium

Module finishes
Black
Champagne gold
Gray
White (RAL 9003)

Weight
60gr

Mounting
On telescopic pole: cut out Ø 13,5mm

Fixing
Screw base

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
350 mA
Typical Vf= 9V

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026

Operaprima with snoot

PHOTOMETRIC DATA (3000K CRI>80)

4W - 60° | UGR 32



H (m)	D (m)	Eav (lx)
1	0.84	195
2	1.68	49
3	2.52	22
4	3.36	12
5	4.20	8

Total lumen output
200 lm


Efficacy
50 lm/W

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026


Operaprima with snoot

SUGGESTED REMOTE DRIVERS

On/Off :
CC20-F-350-N



Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):
CC25-DM-350-N



Other options upon request

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 261026