

## READING LIGHT FLEX



IP40



Class III



Montaggio a parete, soffitto, pavimento  
Wall, ceiling, floor mounting



Collegare in serie 350mA o 500mA  
Connect in series at 350mA or 500mA




100 gr - 170 gr



Ø 17 mm




Altamente riciclabile  
Highly recyclable

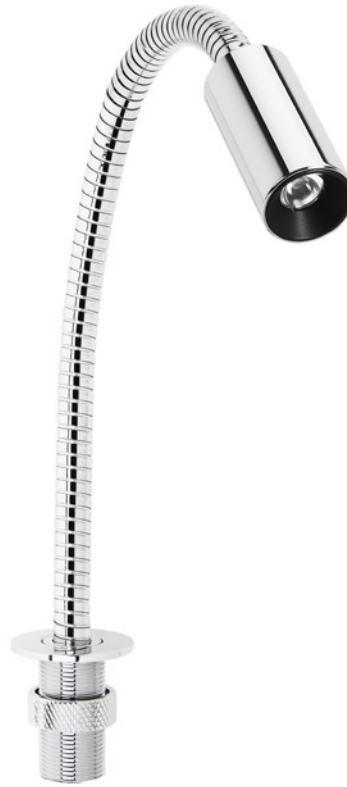

### READING LIGHT FLEX 250

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour
Lumen 3000K	100lm	150lm		
10° Lens	734238._ _	734239._ _	1 Cromo Lucido Shiny Chrome	U 2200K X 2700K CRI > 90 W 3000K CRI > 90
25° Lens	7G4238._ _	7G4239._ _	4 Nero - Black	9 4000K
40° Lens	744238._ _	744239._ _	8 Oro Satinato Satin Gold	1 5000K
60° Lens	754238._ _	754239._ _		

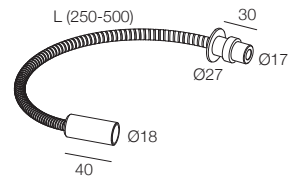

### READING LIGHT FLEX 500

	1W 350mA	2W 500mA	Finiture Finish	Colore LED LED Colour
Lumen 3000K	100lm	150lm		
10° Lens	734240._ _	734241._ _	1 Cromo Lucido Shiny Chrome	U 2200K X 2700K CRI > 90 W 3000K CRI > 90
25° Lens	7G4240._ _	7G4241._ _	4 Nero - Black	9 4000K
40° Lens	744240._ _	744241._ _	8 Oro Satinato Satin Gold	1 5000K
60° Lens	754240._ _	754241._ _		

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N  
500mA CC20-F-500-N

EXAMPLE CODE COMPOSITION  
123456.

LED COLOUR  
FINISH