


Ritmo

Showcase lighting | IP40 | Class III | Dimmable

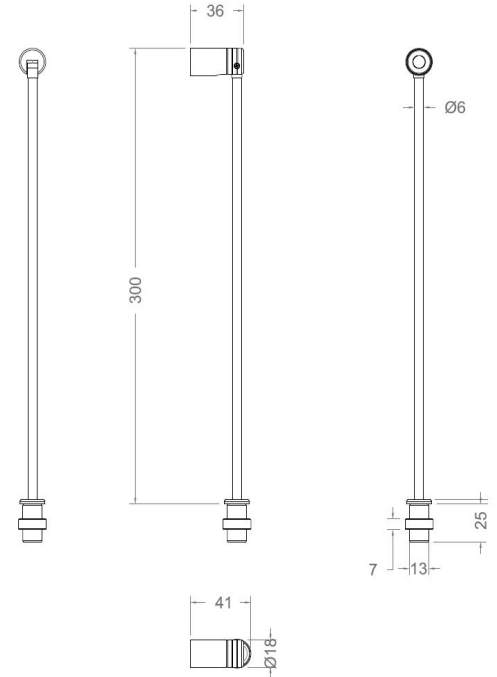

LIGHT SOURCE & OPTIC

Power

1W
2W

Zoom Lens

10°
25°
40°
60°

Beam Direction

Adjustable:
Tilting +/-150°, Rotating +/-355°
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>90
3000K CRI>90
4000K CRI>90
5000K CRI>80

Lifetime

(L85) >55.000 hrs

FIXTURE

Dimensions

Ø 18mm x 36 mm x Hmax 300mm

Material

Aluminium

Module finishes

Black
Titanium
Champagne gold
Gray

Weight

110gr

Mounting

On telescopic pole: cut out Ø 13,5mm

Fixing

Screw base

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
350 mA
Typical Vf= 3V

Driver requirement


Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

PHOTOMETRIC DATA (3000K CRI>90)

2W - 10° | UGR 10

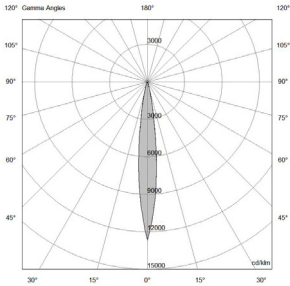


H (m)	D (m)	Eav (lx)
1	0.23	779
2	0.45	195
3	0.68	87
4	0.91	49
5	1.14	31

Total lumen output
100 lm

Efficacy
50 lm/W

2W - 25° | UGR 14

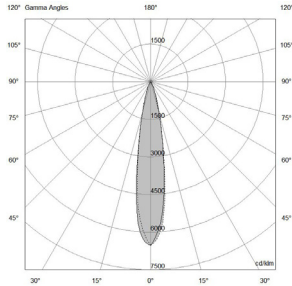


H (m)	D (m)	Eav (lx)
1	0.33	449
2	0.66	112
3	0.99	50
4	1.32	28
5	1.65	18

Total lumen output
108 lm

Efficacy
54 lm/W

2W - 40° | UGR 20

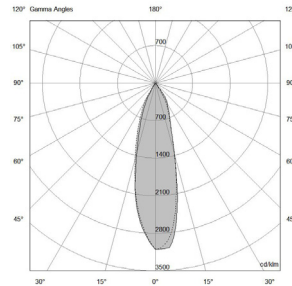


H (m)	D (m)	Eav (lx)
1	0.49	203
2	0.98	51
3	1.47	39
4	1.96	22
5	2.45	14

Total lumen output
106 lm

Efficacy
53 lm/W

2W - 60° | UGR 30

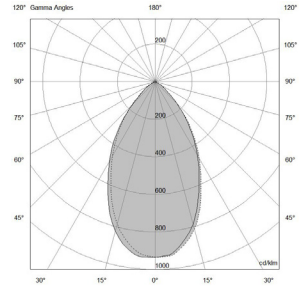

H (m)	D (m)	Eav (lx)
1	0.67	203
2	1.34	51
3	2.01	23
4	2.68	13
5	3.35	8


Total lumen output
84 lm

Efficacy
42 lm/W


SUGGESTED REMOTE DRIVERS

On/Off :

CC20-F-350/500-N

**Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):**

CC25-DM-350/500-N



Other options upon request