


# Spillo LT

Bollards | IP67 | Class III | Dimmable

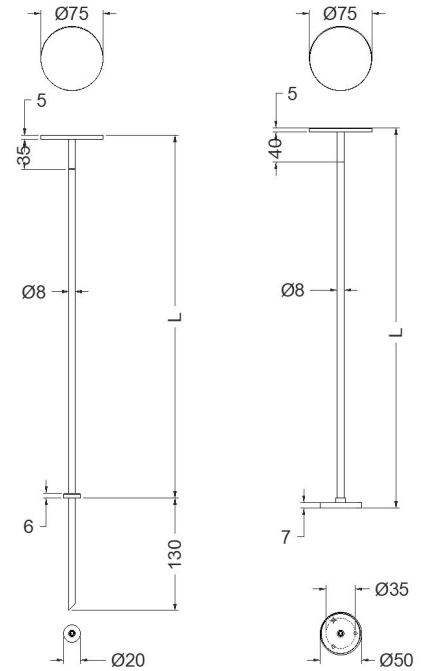

## LIGHT SOURCE & OPTIC

### Power

1W

2W

### Emission

Diffused

### Beam Direction

Fixed, Symmetrical

### Material

PMMA

### LED quantity

1

### Binning

2 MacAdam steps

### Color temperature & quality

2700K CRI>80

2700K CRI>90

3000K CRI>90

4000K CRI>90

### Lifetime

(L90) >60.000 hrs

## FIXTURE

### Dimensions

Ø 75mm x L 250-400-550mm

### Material

Aluminium

### Body finishes

Black

Dark bronze

Gray

### Weight

110-115-120gr

### Mounting

On floor

### Fixing

Stake

Bollard (screws)

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant current:

350 mA

500 mA

Typical Vf= 3V

### Driver requirement

Remote (not included)

### Control

On/off

Push switch

Phase Cut

0/1-10 V

Casambi

DALI


### Feature

Water Infiltration Protection System

# Spillo LT

PHOTOMETRIC DATA (3000K CRI>90)


1W - diffuse | UGR 23



Total lumen output  
25 lm

Efficacy  
25 lm/W

2W - diffuse | UGR 24




Total lumen output  
34 lm

Efficacy  
17 lm/W

# Spillo LT

## INSTALLATION ACCESSORIES

Watertight connector (A00357.40)




## SUGGESTED REMOTE DRIVERS


**On/Off :**  
CC14-F-350/500-PI



**Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):**  
CC20-D-350-P



CV25-D-500-P



Other options upon request