


Ted Z H900

Bollards | IP67 | Class II | Not dimmable

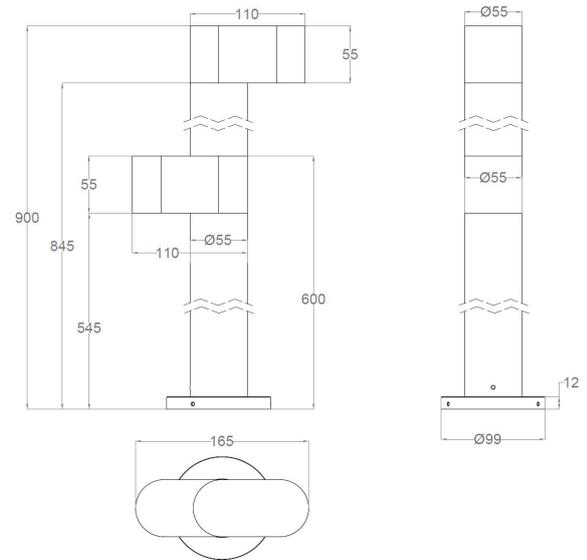

LIGHT SOURCE & OPTIC

Power

6Wx2

Optic

Asymmetric lens

Beam Direction

Fixed, Asymmetric

Material

PMMA+glass

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>80/90
3500K CRI>80
4000K CRI>80

Lifetime (Ta 25°)

L90 >60.500 hrs

FIXTURE

Dimensions

L165mm x D55mm x H900mm

Material

Aluminium

Body finishes

Black (RAL 9005)
Moka (RAL 1247)
Anthracite Grey (RAL 7016)
Olive green (RAL 6014)

Weight

3300gr

Mounting

Floor Mounting

Fixing

Applique
With accessories (see page 3)

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Main Voltage:
220-240Vac

Driver requirement

Built-in

Control

On/off


Feature

Water Infiltration Protection System

Ted Z H900

PHOTOMETRIC DATA (3000K CRI>80)

6Wx2 - 40°Asy | UGR 22



H (m)	D (m)	Eav (lx)
1	580	307
2	140	77
3	62	34
4	35	19
5	22	12

Total lumen output


376 lm x 2

Efficacy

62 lm/W

INSTALLATION ACCESSORIES

Anchor for concrete (A00870.60)



Watertight connector (A00387.40)

