


Tono Zoom B Micro

Track and surface zoom projectors | IP40 | Class III | Dimmable

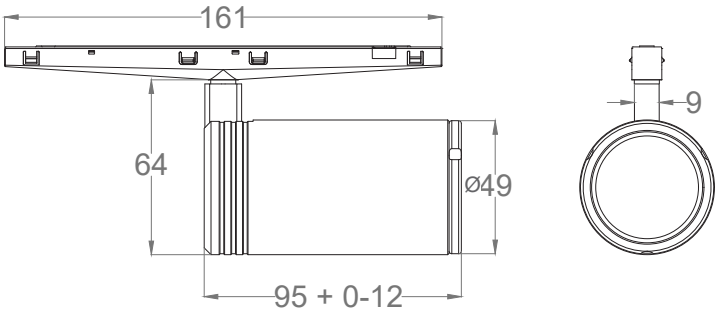

LIGHT SOURCE & OPTIC

Power
10W

Lens
Zoom 14°>36°

Beam Direction
Adjustable:
Tilting +/-100°, rotating +/-355°,
Symmetrical

Material
PMMA + glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>90
2400K CRI>90
2700K CRI>90/95
3000K CRI>80/90/95
3500K CRI>90/95
4000K CRI>90

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 50mm x H 95mm (cylinder)

Material
Aluminium

Body finishes
Black (RAL 9005)
White (RAL 9003)
All White (RAL 9003)

Weight
330gr

Mounting
On Track

Fixing
Track Connector

Working temperature
-20° / +40°

ELECTRICAL FEATURES



Power supply
Constant tension:
24-48 Vdc
Typical Vf= 18V

Driver requirement
Remote (not included)

Control
On/off
DALI
Broadcast

Tono Zoom B Micro

PHOTOMETRIC DATA (3000K CRI>90)

10W - 14° UGR 15			10W - 36° UGR 17		
					
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.24	3985	1	0.65	1063
2	0.49	996	2	1.30	266
3	0.73	443	3	1.95	118
4	0.98	249	4	2.60	66
5	1.22	159	5	3.25	43
Total lumen output 410 lm			Total lumen output 557 lm		
Efficacy 41 lm/W			Efficacy 55 lm/W		

Tono Zoom B Micro


INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Micro Track:

Standard track (A00918._0)
1m



Trimless track (A01064._0)
1m

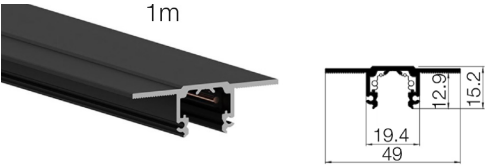


Suspended track (A01664._0)
1m




SUGGESTED REMOTE DRIVER

On/Off :
CC70-F-24-N
CV70-F-48-N



For On/Off and DALI version.
Please consider 1 address for each DALI projector.

Multifunction (DALI 2, 0/1-10V, PUSH):
CV75-DM-24-NI
CV75-DM-48-NI



For Broadcast version.
Please consider 1 address for each driver in case of DALI control.

Other options upon request