


Triuum i IP67

Recessed Lighting | IP67 | Class III | Dimmable

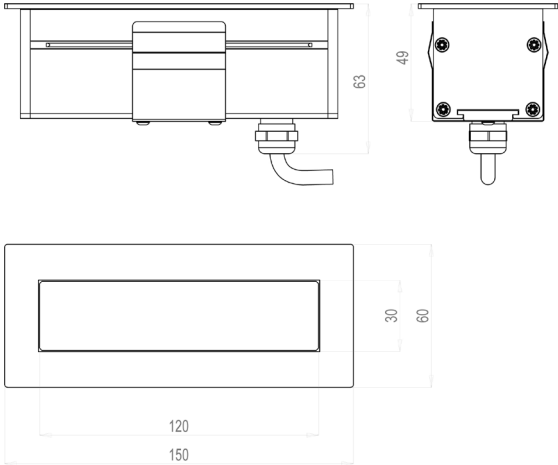

LIGHT SOURCE & OPTIC

- Power**
7W
15W
- Lens**
10°
25°
40°
60°
Elliptical Lens
Wall Washer
- Beam Direction**
Fixed, Symmetrical
- Material**
PMMA
- LED quantity**
3
- Binning**
2 MacAdam step

- Color temperature & quality**
2200K CRI>80 (7W only)
2700K CRI>80
3000K CRI>80/90
3500K CRI>80
4000K CRI>80
RGBW (7W only)

- Lifetime**
L80 >60.000 hrs (7W) / 60.5000 hrs (15W)

FIXTURE

- Dimensions**
150mm x 60mm x H 48mm
- Material**
Aluminium
AISI 316L
- Body finishes**
Brushed Stainless Steel
AISI 316L
- Weight**
600gr
- Mounting**
Floor recessed
- Fixing**
Recessed box
- Working temperature**
-20° / +40°


ELECTRICAL FEATURES

- Power supply**
Constant current:
700mA
Typical Vf= 24V
Constant tension:
24Vdc
- Driver requirement**
Remote (not included)
- Control**
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI
- Feature**
Water Infiltration Protection System

Trium i IP67

PHOTOMETRIC DATA (3000K CRI>80)

7W - 10° | UGR 12




H (m)	D (m)	Eav (lx)
1	0.21	5237
2	0.42	1309
3	0.63	582
4	0.84	327
5	1.05	209

Total lumen output
606 lm

Efficacy
93 lm/W

7W - 25° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.52	1516
2	1.03	379
3	1.55	168
4	2.07	95
5	2.59	61

Total lumen output
595 lm

Efficacy
87 lm/W

7W - 40° | UGR 16




H (m)	D (m)	Eav (lx)
1	0.65	715
2	1.31	179
3	1.96	79
4	2.61	45
5	3.27	29

Total lumen output
529 lm

Efficacy
76 lm/W

7W - 60° | UGR 20




H (m)	D (m)	Eav (lx)
1	1.32	263
2	2.64	66
3	3.97	29
4	5.29	16
5	6.61	11

Total lumen output
570lm

Efficacy
81 lm/W

7W - Elliptical Lens | UGR 16




H (m)	D (m)	Eav (lx)
1	0.80-0.12	712
2	1.16-0.25	178
3	2.40-0.37	79
4	3.20-0.49	45
5	4.00-0.61	28

Total lumen output
577 lm

Efficacy
84 lm/W

7W - Wall Washer | UGR 0



H (m)	D (m)	Eav (lx)
1	0.36-4.51	100
2	0.72-9.02	25
3	1.08-13.53	11
4	1.44-18.04	6
5	1.80-22.55	4


Total lumen output
519 lm

Efficacy
74 lm/W

Trium i IP67

PHOTOMETRIC DATA (3000K CRI>80)

15W - 10° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.23	7552
2	0.46	1888
3	0.68	839
4	0.91	472
5	1.14	302

Total lumen output
1030 lm

Efficacy
73 lm/W

15W - 25° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.52	2621
2	1.04	655
3	1.56	291
4	2.09	164
5	2.61	105

Total lumen output
1048 lm

Efficacy
71 lm/W

15W - 40° | UGR 18




H (m)	D (m)	Eav (lx)
1	0.63	1297
2	1.26	324
3	1.89	144
4	2.52	81
5	3.15	52

Total lumen output
928 lm

Efficacy
62 lm/W

15W - 60° | UGR 21




H (m)	D (m)	Eav (lx)
1	1.28-1.16	496
2	2.56-2.32	124
3	3.84-3.48	55
4	5.12-4.64	31
5	6.40-5.80	20

Total lumen output
1015 lm

Efficacy
68 lm/W

15W - Elliptical Lens | UGR 18



H (m)	D (m)	Eav (lx)
1	0.80-0.16	3436
2	1.60-0.32	859
3	2.39-0.47	382
4	3.19-0.63	215
5	3.99-0.79	137


Total lumen output
1006 lm

Efficacy
68 lm/W

Trium i IP67

PHOTOMETRIC DATA (RGBW-white)

7W - 10° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.25	4112
2	0.50	1028
3	0.75	457
4	1.00	257
5	1.26	164

Total lumen output
573 lm

Efficacy
87 lm/W

7W - 25° | UGR 13




H (m)	D (m)	Eav (lx)
1	0.53	1339
2	1.06	335
3	1.59	149
4	2.12	84
5	2.65	54

Total lumen output
558 lm

Efficacy
81 lm/W

7W - 40° | UGR 16




H (m)	D (m)	Eav (lx)
1	0.56	763
2	1.12	191
3	1.68	85
4	2.23	48
5	2.79	31

Total lumen output
487 lm

Efficacy
70 lm/W

7W - 60° | UGR 20




H (m)	D (m)	Eav (lx)
1	0.97	358
2	1.93	90
3	2.90	40
4	3.86	22
5	4.83	14

Total lumen output
537 lm

Efficacy
77 lm/W

7W - Elliptical Lens | UGR 16




H (m)	D (m)	Eav (lx)
1	0.82-0.19	1725
2	1.65-0.39	431
3	2.47-0.58	192
4	3.30-0.78	108
5	4.12-0.97	69

Total lumen output
535 lm

Efficacy
78 lm/W

7W - Wall Washer | UGR 0



H (m)	D (m)	Eav (lx)
1	0.57-4.66	71
2	1.14-9.32	18
3	1.70-13.93	8
4	2.27-18.64	4
5	2.84-23.31	3

Total lumen output
431 lm

Efficacy
61 lm/W

Triuum i IP67

ACCESSORIES


Optical Filters

- Louver
- Asy Louver

INSTALLATION ACCESSORIES


Stainless Steel recessed box

A01412.60



Removing tool


A01478.H0



SUGGESTED REMOTE DRIVERS

On/Off:


CV30-F-24-PI



Ø 44

Dimmable (DALI 2):


CV25-D-24-PI



Ø 60

RGBW:

CC50-X-700-NL



Ø 84

Other options upon request