
Zoom mR

Indoor | Small downlights | IP40 | Class III | Dimmable



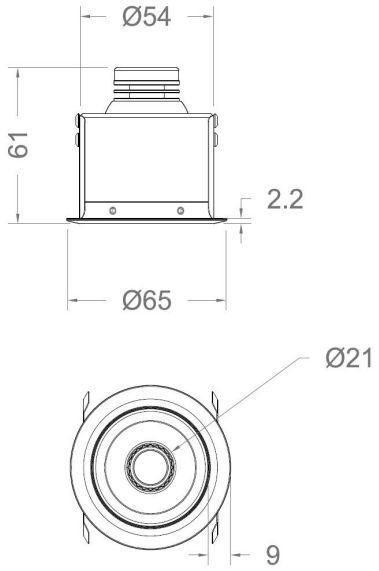

LIGHT SOURCE & OPTIC

Power
3W

Zoom Lens
10° >40°

Beam Direction
Adjustable:
Tilting +/-25°, Rotating +/-360°,
Symmetrical

Material
Optical glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80
3000K CRI>80/90
4000K CRI>80
5000K CRI>80

Lifetime (Ta 25°)
L_{90} >60.000 hrs

Source flux (3000K CRI>90)
265lm @ 900 mA

FIXTURE

Dimensions
Ø 65mm x H 61mm

Material
Aluminium

Module finishes
Black
Gray
White (RAL9003)

Weight
170gr

Mounting
Recessed: cut out Ø 54mm

Fixing
Springs

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
900 mA
Typical Vf= 3V

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 221026

Zoom mR

PHOTOMETRIC DATA (3000K CRI>90)

3W - 10° | UGR 8




H (m)	D (m)	Eav (lx)
1	0.21	354
2	0.42	88
3	0.62	39
4	0.83	22
5	1.04	14

Total lumen output
23 lm

Efficacy
8 lm/W

3W - 40° | UGR 2



H (m)	D (m)	Eav (lx)
1	0.67	108
2	1.34	27
3	2.01	12
4	2.68	7
5	3.35	4

Total lumen output
54 lm


Efficacy
18 lm/W

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 221026


Zoom mR

SUGGESTED REMOTE DRIVERS

On/Off :
CC20-F-900-N



Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):
CC25-DM-900-N



Other options upon request

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 221026