


Micro 230V with hex louver





Projectors | IP67 | Class II | Dimmable

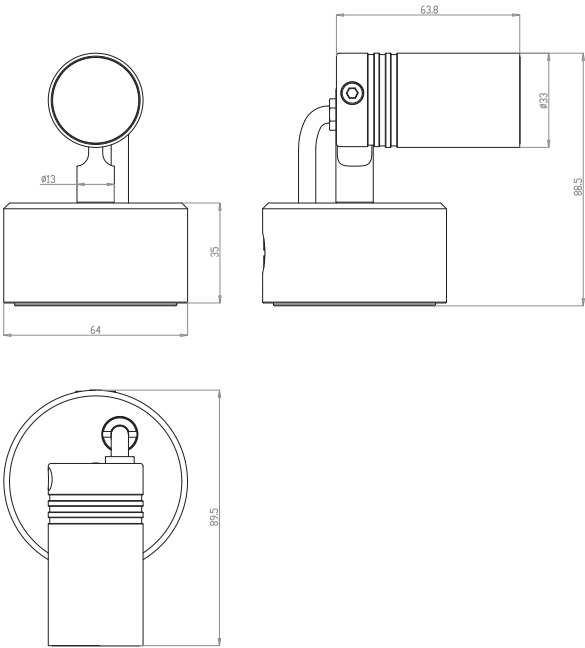


LIGHT SOURCE & OPTIC	FIXTURE	ELECTRICAL FEATURES
<p>Power 4W</p> <p>Lens 15° 30° 60° Elliptical Frosted Glass</p> <p>Beam Direction Adjustable: Tilting +/-100°, rotating +/-355°, Symmetrical</p> <p>Material PMMA + glass</p> <p>LED quantity 3</p> <p>Binning 2 MacAdam steps</p> <p>Color temperature & quality 2200K 2700K 3000K CRI>80/90 4000K</p> <p>Lifetime (L90) >60.000 hrs</p>	<p>Dimensions Ø 49mm x H 76mm (cylinder)</p> <p>Material Aluminium</p> <p>Body finishes Black Gray</p> <p>Weight 460gr</p> <p>Mounting On surface</p> <p>Fixing Applique Stake Tree strap mounting</p> <p>Working temperature -20° / +40°</p>	<p>Power supply Main Voltage: 220-240Vac</p> <p>Driver requirement Built-in</p> <p>Control On/off</p> <p>Feature Water Infiltration Protection System</p>

Micro 230V with hex louver

PHOTOMETRIC DATA (3000K CRI>90)

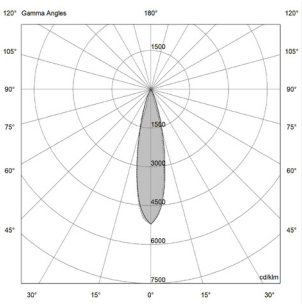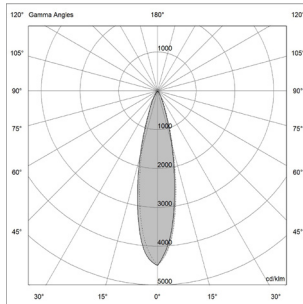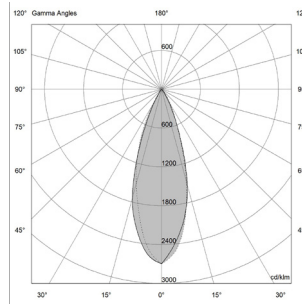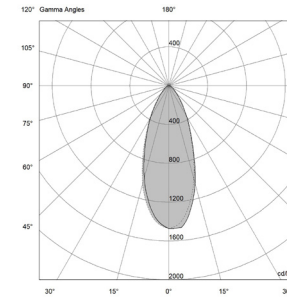4W - 15° UGR 15			4W - 30° UGR 17			4W - 60° UGR 20			4W - Frosted° UGR 24		
											
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.39	623	1	0.42	441	1	0.59	194	1	0.74	83
2	0.78	156	2	0.84	110	2	1.18	48	2	1.49	21
3	1.16	69	3	1.26	49	3	1.77	22	3	2.23	9
4	1.55	39	4	1.68	28	4	2.35	12	4	2.97	5
5	1.94	25	5	2.10	18	5	2.94	8	5	3.72	3
Total lumen output 198 lm			Total lumen output 162 lm			Total lumen output 121 lm			Total lumen output 97 lm		
Efficacy 49 lm/W			Efficacy 40 lm/W			Efficacy 30 lm/W			Efficacy 24 lm/W		

4W - Elliptical | UGR 18

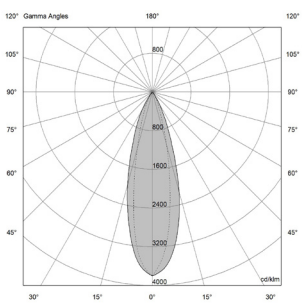

H (m)	D (m)	Eav (lx)
1	0.40	358
2	0.79	90
3	1.19	40
4	1.58	22
5	1.98	14


Total lumen output
156 lm

Efficacy
39 lm/W


Micro 230V with hex louver

INTERCHANGEABLE ACCESSORIES

Low glare visor (A00519._0)



Low glare snoot (A00848._0)



INSTALLATION ACCESSORIES

Watertight connector (A00387.40)

