

ODINO 6 P L30°

LIGHT SOURCE

LED quantity	1
Power max	6 W
Total lumen output (3000K)	267 lm
Efficacy lm/W (3000K)	44 lm/W
LOR (3000K)	62%
CRI	>80
LED Temperature (K)	3000 K
Average operational life	50.000 hours

OPTIC

Material	PMMA lens
Available optics	30° - 50°
Beam direction	Adjustable +/-180°, Rotating +/-355°
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Aluminum Hard Coat Anodizing (Black, Grey, Dark Bronze)
Available finishes	Black, Grey, Dark Bronze
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	DRIVERLESS <i>Technology</i>
Dimmable	Upon request
For emergency lighting	-
Connection in	At 220-240 Vac
Class	I

MECHANICAL FEATURES

Dimensions (mm)	Ø50 x 107
Weight	350 gr
Mounting	Wall, Ceiling, Floor mounting
Cut-out (mm)	-
Use	Outdoor

NOTES

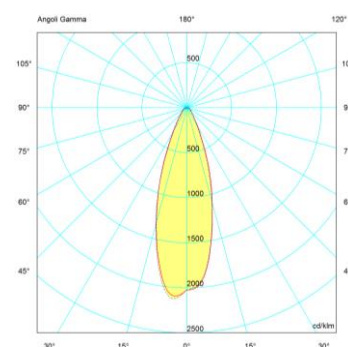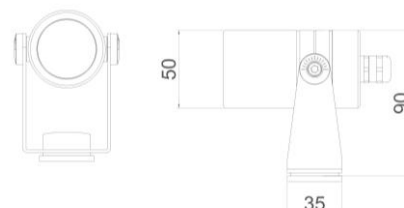

6W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
30°			
1.00	0.61	569	342
2.00	1.21	142	85
3.00	1.82	63	38
4.00	2.42	36	21
5.00	3.03	23	14