

## LIGHT SOURCE

LED quantity	1
Power max	2 W – 3 W
Total lumen output (3000K)	28 lm – 37 lm
Efficacy lm/W (3000K)	14 lm/W – 12 lm/W
LOR (3000K)	14% - 18%
CRI	>80 - >90
LED Temperature (K)	2700K – 3000K – 3000K CRI>90 - 4000K
Average operational life	50.000 hours

## OPTIC

Material	PC
Available optics	45° emission
Beam direction	Fixed
Flux symmetry	Asymmetrical
Accessories	-

## LED FIXTURE

Material	Aluminum, Tempered glass
Finish	Aluminum Hard Coat Anodizing (Black, Grey)
Available finishes	(Black, Grey)
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	-

## ELECTRICAL FEATURES



Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection	In series at 500mA – 700mA
Class	III

## MECHANICAL FEATURES

Dimensions (mm)	44 x 44 x 65
Weight	90 gr
Mounting	Wall
Cut-out (mm)	-
Use	Outdoor

## NOTES

Recessed box (A00831.30) is necessary for installing the fixture correctly.

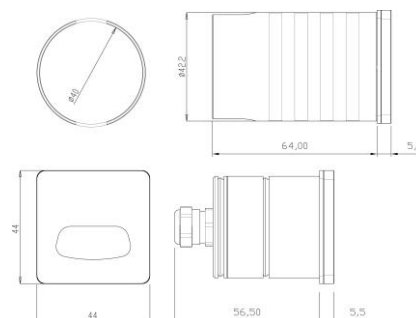

3W

H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
0.60	0.94	165	55
1.20	1.88	41	14
1.80	2.81	18	6
2.40	3.75	10	3
3.00	4.69	7	2