






















## CONTINUUM IP67









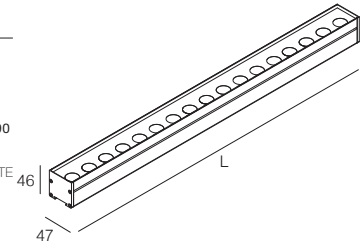




-  IP67
-  Class III 24Vdc
-  Class II 220-240Vac
-  Montaggio a parete, soffitto, pavimento  
Wall, ceiling, floor mounting
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 100 cm  
100 cm neoprene cable  
(disponibile lunghezza cavo su misura)  
(additional cable length available upon request)
-  Collegare in parallelo 24Vdc  
Connect in parallel at 24Vdc
-  Alimentazione integrata, collegare alla tensione di rete 220-240Vac  
Built-in driver, connect directly to the line voltage to 220-240Vac
-  Altamente riciclabile  
Highly recyclable









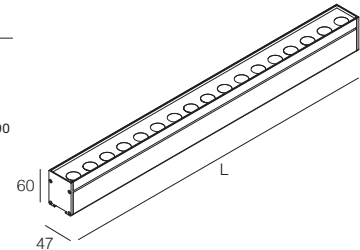

### CONTINUUM IP67


Lumen Output 3000K 2500 lm/m	30W/m 24Vdc					Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734319._.	734320._.	734321._.	734322._.	734323._.	■ 4 Nero - Black	<ul style="list-style-type: none"> <li> U 2200K</li> <li> Y 2700K</li> <li> 6 3000K</li> <li> W 3000K CRI &gt; 90</li> <li> 9 4000K</li> <li> 8 DYNAMIC WHITE</li> </ul>
 25° Lens	7G4319._.	7G4320._.	7G4321._.	7G4322._.	7G4323._.		
 40° Lens	744319._.	744320._.	744321._.	744322._.	744323._.		
 60° Lens	754319._.	754320._.	754321._.	754322._.	754323._.		
 Lente ellittica Elliptical lens	774319._.	774320._.	774321._.	774322._.	774323._.		



Lumen Output 3000K 2500 lm/m	30W/m 220-240Vac					Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734309._.	734310._.	734311._.	734312._.	734313._.	■ 4 Nero - Black	<ul style="list-style-type: none"> <li> U 2200K</li> <li> Y 2700K</li> <li> 6 3000K</li> <li> W 3000K CRI &gt; 90</li> <li> 9 4000K</li> </ul>
 25° Lens	7G4309._.	7G4310._.	7G4311._.	7G4312._.	7G4313._.		
 40° Lens	744309._.	744310._.	744311._.	744312._.	744313._.		
 60° Lens	754309._.	754310._.	754311._.	754312._.	754313._.		
 Lente ellittica Elliptical lens	774309._.	774310._.	774311._.	774312._.	774313._.		



Lumen Output 3000K 2500 lm/m	30W/m DALI 220-240Vac					Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734314._.	734315._.	734316._.	734317._.	734318._.	■ 4 Nero - Black	<ul style="list-style-type: none"> <li> U 2200K</li> <li> Y 2700K</li> <li> 6 3000K</li> <li> W 3000K CRI &gt; 90</li> <li> 9 4000K</li> </ul>
 25° Lens	7G4314._.	7G4315._.	7G4316._.	7G4317._.	7G4318._.		
 40° Lens	744314._.	744315._.	744316._.	744317._.	744318._.		
 60° Lens	754314._.	754315._.	754316._.	754317._.	754318._.		
 Lente ellittica Elliptical lens	774314._.	774315._.	774316._.	774317._.	774318._.		

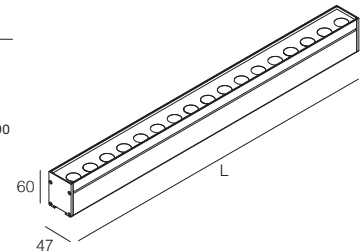

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N  
CV100-L-24-NL  
DYNAMIC WHITE

ACCESSORI  
ACCESSORIES

24Vdc



Micro connettore stagno  
Micro watertight connector  
A00357.40

220-240Vac


















Connettore stagno  
Watertight connector  
A01023.40

EXAMPLE CODE COMPOSITION  
123456.



## CONTINUUM IP67

	CONTINUUM 24Vdc	CONTINUUM 220-240Vac	DESCRIPTION	
<b>ELEMENTI DI FISSAGGIO</b> FIXING ELEMENTS				Staffa fissa Fixed bracket A00949.60
				Placca di fissaggio Fixing plate A00950.40
				Staffa orientabile H30 Adjustable bracket H30 A00951.40
				Staffa orientabile H50 Adjustable bracket H50 A00952.40
				Staffa orientabile H80 Adjustable bracket H80 A00953.40

Staffa fissa  
Fixed bracket

Placca di fissaggio  
Fixing plate

Staffa orientabile  
Adjustable bracket

