





















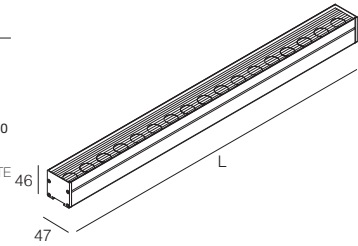
CONTINUUM IP67 LOUVER











-  IP67
-  Class III 24Vdc
-  Class II 220-240Vac
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
-  Alimentazione integrata, collegare alla tensione di rete 220-240Vac
Built-in driver, connect directly to the line voltage to 220-240Vac
-  Altamente riciclabile
Highly recyclable












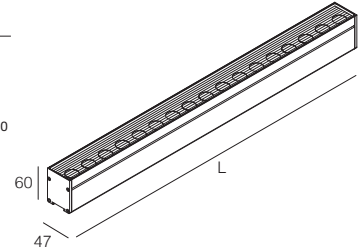

CONTINUUM IP67 CON FRANGILUCE - WITH LOUVER


Lumen Output 3000K 2500 lm/m	30W/m 24Vdc					Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734395._.	734396._.	734397._.	734398._.	734399._.	■ 4 Nero - Black	<ul style="list-style-type: none">  U 2200K  Y 2700K  6 3000K  W 3000K CRI > 90  9 4000K  8 DYNAMIC WHITE
 25° Lens	7G4395._.	7G4396._.	7G4397._.	7G4398._.	7G4399._.		
 40° Lens	744395._.	744396._.	744397._.	744398._.	744399._.		
 60° Lens	754395._.	754396._.	754397._.	754398._.	754399._.		
 Lente ellittica Elliptical lens	774395._.	774396._.	774397._.	774398._.	774399._.		



Lumen Output 3000K 2500 lm/m	30W/m 220-240Vac					Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734385._.	734386._.	734387._.	734388._.	734389._.	■ 4 Nero - Black	<ul style="list-style-type: none">  U 2200K  Y 2700K  6 3000K  W 3000K CRI > 90  9 4000K
 25° Lens	7G4385._.	7G4386._.	7G4387._.	7G4388._.	7G4389._.		
 40° Lens	744385._.	744386._.	744387._.	744388._.	744389._.		
 60° Lens	754385._.	754386._.	754387._.	754388._.	754389._.		
 Lente ellittica Elliptical lens	774385._.	774386._.	774387._.	774388._.	774389._.		



Lumen Output 3000K 2500 lm/m	30W/m DALI 220-240Vac					Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734390._.	734391._.	734392._.	734393._.	734394._.	■ 4 Nero - Black	<ul style="list-style-type: none">  U 2200K  Y 2700K  6 3000K  W 3000K CRI > 90  9 4000K
 25° Lens	7G4390._.	7G4391._.	7G4392._.	7G4393._.	7G4394._.		
 40° Lens	744390._.	744391._.	744392._.	744393._.	744394._.		
 60° Lens	754390._.	754391._.	754392._.	754393._.	754394._.		
 Lente ellittica Elliptical lens	774390._.	774391._.	774392._.	774393._.	774394._.		

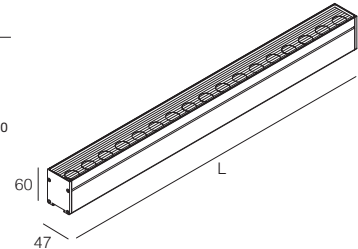

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N
CV100-L-24-NL
DYNAMIC WHITE

ACCESSORI
ACCESSORIES

24Vdc



Micro connettore stagno
Micro watertight connector
A00357.40

220-240Vac


















Connettore stagno
Watertight connector
A01023.40

EXAMPLE CODE COMPOSITION
123456.



CONTINUUM IP67

	CONTINUUM 24Vdc	CONTINUUM 220-240Vac	DESCRIPTION	
ELEMENTI DI FISSAGGIO FIXING ELEMENTS				Staffa fissa Fixed bracket A00949.60
				Placca di fissaggio Fixing plate A00950.40
				Staffa orientabile H30 Adjustable bracket H30 A00951.40
				Staffa orientabile H50 Adjustable bracket H50 A00952.40
				Staffa orientabile H80 Adjustable bracket H80 A00953.40

Staffa fissa
Fixed bracket

Placca di fissaggio
Fixing plate

Staffa orientabile
Adjustable bracket

