

working tool

DGA

● LIGHT
IN MOTION

index

NOVELTIES 2026

INDOOR p 14

























OUTDOOR p 130

IMMERSION p 196

LINEAR SYSTEM p 206

ACCESSORIES & DRIVERS p 258

Downlights

 2	 4	 6	 8	 10	 12	 14	 15
Ariel Am dynamic white Ø 60 9W	Ariel AF dynamic white Ø 40 9W	Ariel mR dynamic white Ø 90 9W	Ariel RF dynamic white Ø 76 9W	Ariel In&Out m dynamic white Ø 74 9W	Ariel In&Out F dynamic white Ø 57 9W	Ariel Tilt 35 m dynamic white Ø 85 9W	Ariel Tilt 35 F dynamic white Ø 68 9W
 3	 5	 7	 9	 11	 13		
Ariel Am dynamic white Wall Washer Ø 60 9W	Ariel AF dynamic white Wall Washer Ø 40 9W	Ariel mR dynamic white Wall Washer Ø 90 9W	Ariel RF dynamic white Wall Washer Ø 76 9W	Ariel In&Out m dynamic white Wall Washer Ø 74 9W	Ariel In&Out F dynamic white Wall Washer Ø 57 9W		
 16	 18	 20	 22	 24	 25		
Saturno Am dynamic white Ø 75 18W	Saturno AF dynamic white Ø 57 18W	Saturno mR dynamic white Ø 110 18W	Saturno RF dynamic white Ø 92 18W	Saturno Tilt 35 m dynamic white Ø 105 18W	Saturno Tilt 35 F dynamic white Ø 85 18W		
 17	 19	 21	 23				
Saturno Am dynamic white Wall Washer Ø 75 18W	Saturno AF dynamic white Wall Washer Ø 57 18W	Saturno mR dynamic white Wall Washer Ø 110 18W	Saturno RF dynamic white Wall Washer Ø 92 18W				

Projectors

 26	 27	 28	 29	 30	 31
Ariel dynamic white Ø 40x78 9W	Ariel PN-m dynamic white Ø 40x78 9W	Ariel PN-F dynamic white Ø 40x78 9W	Saturno dynamic white Ø 55x119 18W	Saturno PN-m dynamic white Ø 55x119 18W	Saturno PN-F dynamic white Ø 55x119 18W

Low Voltage Track Projectors



Ariel B Micro
dim to warm
Ø 40x78
10W



Ariel B Multi
dynamic white
Ø 40x78
10W



Saturno B Multi
dynamic white
Ø 55x119
19W

Mains Voltage Track Projectors



Saturno B
dynamic white
Ø 55x118
20W

Step Lights



Eclissi Mini
Ø 40
2W

OUTDOOR NOVELTIES 2026

Step Lights



Eclissi Mini IP67
Ø 40
2W



Eclissi IP67
Ø 71
4W

Pendant Lighting



Luna IP65
Ø 95
7W




Luna m IP65
Ø 95
6W



Luna F IP65
Ø 95
6W

Recessed Lights



Ariel iR IP67
Ø 99
9W



Saturno iR IP67
Ø 119
12W




- IP40
- 250
- 250 g
- Ø54
- 2
- 2,5
- SD CM
- TM 66
- [2]

Ariel Am fixing frame

FIXING FRAME A01232...0

FRAME FINISH

_ See module finish



Ariel Am dynamic white module

- [1] 14° Lens not interchangeable
- [2] not available for tunable white

250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4948...
52° Lens 754948...

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM
1800K / 3000K
CRI > 90
- M2** TUNABLE WHITE
1800K / 4000K
CRI > 90

DECORATIVE RING

- 4** Black
- I** Gold Chrome
- 8** Satin Gold
- N** Satin Nickel
- 1** Shiny Chrome

OPTICAL FILTER

- W** Without Filter
- E** Elliptical Filter
- H** Hex Louver
- P** Prismatic Filter
- S** Softening Lens

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42


INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION

123456.






- IP40
- 250
- 250 g
- Ø54
- 2

Ariel Am Wall Washer fixing frame

FIXING FRAME A01232...0

FRAME FINISH

_ See module finish



Ariel Am dynamic white Wall Washer module

250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

Wall Washer 7W4984..._ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM
1800K / 3000K
CRI > 90
- M2 TUNABLE WHITE
1800K / 4000K
CRI > 90

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



- IP40
- 250
- 220 g
- Ø50
- 2
- 2,5
- SD CM
- TM 66
- [2]

Ariel AF fixing frame

FIXING FRAME A00861.30



Ariel AF dynamic white module

- [1] 14° Lens not interchangeable
- [2] not available for tunable white

250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4948._____
52° Lens 754948._____

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM 1800K / 3000K CRI > 90
- M2 TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

INTERCHANGEABLE ACCESSORIES




p. 260



Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION

123456.






- IP40
- 250
- 220 g
- Ø50
- 2

Ariel AF Wall Washer fixing frame

FIXING FRAME **A00861.30**



Ariel AF dynamic white Wall Washer module

250mA **9W**
Lumen Output 3000K CRI > 90 250mA - 670 lm

Wall Washer **7W4984._ _**

MODULE FINISH CCT

- | | |
|---|---|
| <ul style="list-style-type: none"> H Black M8 Brown G3 Gray C Gothic Cement G7 Beige Gray A6 Gray White S Warm White 7 White | <ul style="list-style-type: none"> T DIM TO WARM
1800K / 3000K
CRI > 90 M2 TUNABLE WHITE
1800K / 4000K
CRI > 90 |
|---|---|

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

- 250mA DW (T) **CC25-DM-250-N** p. 42
- 250mA TW (M2) **CC45-D-2x250-N** p. 42

ACCESSORIES



Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




- IP40
- 250
- 480 g
- Ø86
- 2
- 2,5
- TM 66
- [2]

Ariel mR fixing frame

FIXING FRAME A01270...0

FRAME FINISH

_ See module finish



Ariel mR dynamic white module

- [1] 14° Lens not interchangeable
- [2] not available for tunable white

250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4949...
52° Lens 754949...

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM 1800K / 3000K CRI > 90
- M2** TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4** Black
- I** Gold Chrome
- 8** Satin Gold
- N** Satin Nickel
- 1** Shiny Chrome

OPTICAL FILTER

- W** Without Filter
- E** Elliptical Filter
- H** Hex Louver
- P** Prismatic Filter
- S** Softening Lens

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)


- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






- IP40
- 250
- 480 g
- Ø86
- 2

Ariel mR Wall Washer fixing frame

FIXING FRAME A01270...0

FRAME FINISH

_ See module finish



Ariel mR dynamic white Wall Washer module

250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

Wall Washer 7W4985..._ _

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM
1800K / 3000K
CRI > 90
- M2** TUNABLE WHITE
1800K / 4000K
CRI > 90

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



- IP40
- 250
- 450 g
- Ø86
- 2
- 2,5
- TM 66
- [2]

Ariel RF fixing frame

FIXING FRAME A00656.30



Ariel RF dynamic white module

- [1] 14° Lens not interchangeable
- [2] not available for tunable white



250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4949._____
52° Lens 754949._____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● I Gold Chrome ● 8 Satin Gold ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens

SUGGESTED DRIVERS (not included)

- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42


INTERCHANGEABLE ACCESSORIES



p. 260

Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION






- IP40
- 250
- 450 g
- Ø86
- 2

Ariel RF Wall Washer fixing frame

FIXING FRAME **A00656.30**



Ariel RF dynamic white Wall Washer module

250mA **9W**
 Lumen Output 3000K CRI > 90 250mA - 670 lm
 Wall Washer **7W4985._ _**

MODULE FINISH CCT

- **H** Black
- **M8** Brown
- **G3** Gray
- **C** Gothic Cement
- **G7** Beige Gray
- **A6** Gray White
- **S** Warm White
- **7** White
- **T** DIM TO WARM
1800K / 3000K
CRI > 90
- **M2** TUNABLE WHITE
1800K / 4000K
CRI > 90

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)


- 250mA DW (T) **CC25-DM-250-N** p. 42
- 250mA TW (M2) **CC45-D-2x250-N** p. 42

ACCESSORIES



Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION






- IP40
- 250
- 540 g
- Ø67
- 2
- 2,5
- SD CM
- TM 66
- [2]

Ariel In&Out m fixing frame

FIXING FRAME A01293...0

FRAME FINISH

_ See module finish



- [1] 14° Lens not interchangeable
- [2] not available for tunable white

Ariel In&Out m dynamic white module

250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4950..._ _ _ _
52° Lens 754950..._ _ _ _

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM 1800K / 3000K CRI > 90
- M2** TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4** Black
- I** Gold Chrome
- 8** Satin Gold
- N** Satin Nickel
- 1** Shiny Chrome

OPTICAL FILTER

- W** Without Filter
- E** Elliptical Filter
- H** Hex Louver
- P** Prismatic Filter
- S** Softening Lens

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)


- 250mA DW (T) **CC25-DM-250-N** p. 42
- 250mA TW (M2) **CC45-D-2x250-N** p. 42

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION












 IP40 250 540 g 067 2

Ariel In&Out m Wall Washer fixing frame

FIXING FRAME A01293._0

FRAME FINISH

_ See module finish



Ariel In&Out m dynamic white Wall Washer module




 250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

Wall Washer 7W4986._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

- T DIM TO WARM
1800K / 3000K
CRI > 90
- M2 TUNABLE WHITE
1800K / 4000K
CRI > 90

FIXING FRAME



MODULE

SUGGESTED DRIVERS (not included)

250mA DW (T) CC25-DM-250-N p. 42
 250mA TW (M2) CC45-D-2x250-N p. 42

EXAMPLE CODE COMPOSITION

123456. CCT FINISH




- IP40
- 250
- 530 g
- Ø64
- 2
- 2,5
- SD CM
- TM 66
- [2]

Ariel In&Out F fixing frame

FIXING FRAME **A00654_0**

FRAME FINISH

- 4 Black
- 3 Gray



Ariel In&Out F dynamic white module

250mA **9W**
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens **7E4950. _ _ _ _**
52° Lens **754950. _ _ _ _**

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM 1800K / 3000K CRI > 90
- M2 TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

[1] 14° Lens not interchangeable
[2] not available for tunable white

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

- 250mA DW (T) **CC25-DM-250-N** p. 42
- 250mA TW (M2) **CC45-D-2x250-N** p. 42

INTERCHANGEABLE ACCESSORIES




p. 260



Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION

123456.






- IP40
- 250
- 530 g
- Ø64
- 2

Ariel In&Out F Wall Washer fixing frame

FIXING FRAME **A00654._0**

FRAME FINISH

- 4 Black
- 3 Gray



Ariel In&Out F dynamic white Wall Washer module

250mA **9W**
 Lumen Output 3000K CRI > 90 250mA - 670 lm
 Wall Washer **7W4986._ _**

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM
1800K / 3000K
CRI > 90
- M2 TUNABLE WHITE
1800K / 4000K
CRI > 90

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

- 250mA DW (T) **CC25-DM-250-N** p. 42
- 250mA TW (M2) **CC45-D-2x250-N** p. 42

ACCESSORIES



Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION






- IP40
- 250
- 290 g
- Ø79
- 2
- 2,5

Ariel Tilt 35 m fixing frame

FIXING FRAME A01678...0

FRAME FINISH

_ See module finish



Ariel Tilt 35 m dynamic white module

[1] 14° Lens not interchangeable

FIXING FRAME



+

MODULE



250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4970...
52° Lens 754970...

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM 1800K / 3000K CRI > 90
- M2** TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4** Black
- I** Gold Chrome
- 8** Satin Gold
- N** Satin Nickel
- 1** Shiny Chrome

OPTICAL FILTER

- W** Without Filter
- E** Elliptical Filter
- H** Hex Louver
- P** Prismatic Filter
- S** Softening Lens

SUGGESTED DRIVERS (not included)


- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






- IP40
- 250
- 293 g
- Ø86
- 2
- 2,5

Ariel Tilt 35 F fixing frame

FIXING FRAME A01677.30



Ariel Tilt 35 F dynamic white module

[1] 14° Lens not interchangeable

FIXING FRAME



+

MODULE



250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4970._____
52° Lens 754970._____

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM 1800K / 3000K CRI > 90
- M2 TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)

- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

INTERCHANGEABLE ACCESSORIES




p. 260



Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 480 g
- Ø67
- 2
- 2,5
- TM 66
- [2]

Saturno Am fixing frame

FIXING FRAME A01235...0


FRAME FINISH

_ See module finish



Saturno Am dynamic white module

- [1] 12° Lens not interchangeable
- [2] not available for tunable white



500mA	18W
Lumen Output 3000K CRI > 90	500mA - 1650 lm
33° Lens	7E4964..._ _ _ _
52° Lens	754964..._ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ○ 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● I Gold Chrome ● 8 Satin Gold ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens

SUGGESTED DRIVERS (not included)


- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 480 g
- Ø67
- 2

Saturno Am Wall Washer fixing frame

FIXING FRAME A01235...0

FRAME FINISH

_ See module finish



Saturno Am dynamic white Wall Washer module

500mA 18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm

Wall Washer 7W4987... _ _

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM
1800K / 3000K
CRI > 90
- M2** TUNABLE WHITE
1800K / 4000K
CRI > 90

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



- IP40
- 500
- 500
- 430 g
- Ø64
- 2
- 2,5
- TM 66
- [2]


Saturno AF fixing frame

FIXING FRAME A01234.30



Saturno AF dynamic white module

- [1] 12° Lens not interchangeable
- [2] not available for tunable white



500mA <small>Lumen Output 3000K CRI > 90</small>	18W <small>500mA - 1650 lm</small>
33° Lens	7E4964. _ _ _ _
52° Lens	754964. _ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM <small>1800K / 3000K CRI > 90</small> ● M2 TUNABLE WHITE <small>1800K / 4000K CRI > 90</small> 	<ul style="list-style-type: none"> ● 4 Black ● I Gold Chrome ● 8 Satin Gold ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens

SUGGESTED DRIVERS (not included)

- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43


INTERCHANGEABLE ACCESSORIES



p. 261

Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 430 g
- Ø64
- 2

Saturno AF Wall Washer fixing frame

FIXING FRAME A01234.30



Saturno AF dynamic white Wall Washer module



500mA 18W
 Lumen Output 3000K CRI > 90 500mA - 1650 lm
 Wall Washer 7W4987._ _

- | MODULE FINISH | CCT |
|---|---|
| <ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White | <ul style="list-style-type: none"> ● T DIM TO WARM
1800K / 3000K
CRI > 90 ● M2 TUNABLE WHITE
1800K / 4000K
CRI > 90 |

SUGGESTED DRIVERS (not included)

- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

INTERCHANGEABLE ACCESSORIES



Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




- IP40
- 500
- 33°
- 830 g
- Ø102
- 2
- 2,5
- TM 66
- [2]

Saturno mR fixing frame

FIXING FRAME A01269...0

FRAME FINISH

_ See module finish



Saturno mR dynamic white module

- [1] 12° Lens not interchangeable
- [2] not available for tunable white

FIXING FRAME



+

MODULE



500mA 18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm

33° Lens 7E4965..._ _ _ _
52° Lens 754965..._ _ _ _

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM 1800K / 3000K CRI > 90
- M2** TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4** Black
- I** Gold Chrome
- 8** Satin Gold
- N** Satin Nickel
- 1** Shiny Chrome

OPTICAL FILTER

- W** Without Filter
- E** Elliptical Filter
- H** Hex Louver
- P** Prismatic Filter
- S** Softening Lens

SUGGESTED DRIVERS (not included)


- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION













Saturno mR Wall Washer fixing frame

FIXING FRAME A01269._0

FRAME FINISH

_ See module finish



Saturno mR dynamic white Wall Washer module

 500mA 18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm

Wall Washer 7W4988._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

- T DIM TO WARM
1800K / 3000K
CRI > 90
- M2 TUNABLE WHITE
1800K / 4000K
CRI > 90

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

500mA DW (T) CC25-DM-500-N p. 43

500mA TW (M2) CC45-D-2x500-N p. 43

EXAMPLE CODE COMPOSITION


123456. CCT FINISH



- IP40
- 500
-
- 920 g
- Ø104
- 2
- 2,5
- TM 66
- [2]


Saturno RF fixing frame

FIXING FRAME A01236.30



Saturno RF dynamic white module

- [1] 12° Lens not interchangeable
- [2] not available for tunable white



500mA <small>Lumen Output 3000K CRI > 90</small>	18W
	500mA - 1650 lm
33° Lens	7E4965.____
52° Lens	754965.____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● I Gold Chrome ● 8 Satin Gold ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens

SUGGESTED DRIVERS (not included)

- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43


INTERCHANGEABLE ACCESSORIES



p. 261

Hole saw
A01258.H0

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 920 g
- Ø104
- 2

Saturno RF Wall Washer fixing frame

FIXING FRAME A01236.30



Saturno RF dynamic white Wall Washer module

500mA 18W
 Lumen Output 3000K CRI > 90 500mA - 1650 lm
 Wall Washer 7W4988._ _

- | MODULE FINISH | CCT |
|---|---|
| <ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White | <ul style="list-style-type: none"> ● T DIM TO WARM
1800K / 3000K
CRI > 90 ● M2 TUNABLE WHITE
1800K / 4000K
CRI > 90 |

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

ACCESSORIES



Hole saw
A01258.H0

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 526 g
- Ø95
- 2
- 2,5

Saturno Tilt 35 m fixing frame

FIXING FRAME **A01680._0**

FRAME FINISH

_ See module finish



Saturno Tilt 35 m dynamic white module

[1] 12° Lens not interchangeable

FIXING FRAME



+

MODULE



500mA 18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm

33° Lens **7E4966._ _ _ _**
52° Lens **754966._ _ _ _**

MODULE FINISH

- H** Black
- M8** Brown
- G3** Gray
- C** Gothic Cement
- G7** Beige Gray
- A6** Gray White
- S** Warm White
- 7** White

CCT

- T** DIM TO WARM
1800K / 3000K
CRI > 90
- M2** TUNABLE WHITE
1800K / 4000K
CRI > 90

DECORATIVE RING

- 4** Black
- I** Gold Chrome
- 8** Satin Gold
- N** Satin Nickel
- 1** Shiny Chrome

OPTICAL FILTER

- W** Without Filter
- E** Elliptical Filter
- H** Hex Louver
- P** Prismatic Filter
- S** Softening Lens

SUGGESTED DRIVERS (not included)


- 500mA DW (T) **CC25-DM-500-N** p. 43
- 500mA TW (M2) **CC45-D-2x500-N** p. 43

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 530 g
- Ø102
- 2
- 2,5

Saturno Tilt 35 F fixing frame

FIXING FRAME A01679.30



Saturno Tilt 35 F dynamic white Wall Washer module

[1] 12° Lens not interchangeable

FIXING FRAME



+

MODULE



500mA 18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm

33° Lens 7E4966._____
52° Lens 754966._____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● I Gold Chrome ● 8 Satin Gold ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens

SUGGESTED DRIVERS (not included)

- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

INTERCHANGEABLE ACCESSORIES




p. 261



Hole saw
A01258.H0

EXAMPLE CODE COMPOSITION







Ariel PL

[1] 14° Lens not interchangeable


- IP40
- 250
- 170 g
- 2
- 2,5




G Ring Nut




L Springs



M Magnetic



P Applique



PL Base for inner connection

Ariel dynamic white

250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens	7E4973. _ _ _ _
52° Lens	754973. _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● H Black	● T DIM TO WARM 1800K / 3000K CRI > 90	● 4 Black	W Without Filter	G Ring Nut
● M8 Brown	● M2 TUNABLE WHITE 1800K / 4000K CRI > 90	● 8 Satin Gold	E Elliptical Filter	L Springs
● G3 Gray		● I Gold Chrome	H Hex Louver	M Magnetic
● C Gothic Cement		● N Satin Nickel	P Prismatic Filter	P Applique
● G7 Beige Gray		● 1 Shiny Chrome	S Softening Lens	PL Base for inner connection
● A6 Gray White				
● S Warm White				
● 7 White				

SUGGESTED DRIVERS (not included)


- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






- IP40
- 250
- 290 g
- Ø51
- 2
- 2,5

Ariel PN-m fixing frame

FIXING FRAME A01727...0

FRAME FINISH

_ See module finish



Ariel PN-m dynamic white module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE



250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4974...
52° Lens 754974...

FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM
1800K / 3000K
CRI > 90
- M2 TUNABLE WHITE
1800K / 4000K
CRI > 90

DECORATIVE RING

- 4 Black
- 8 Satin Gold
- I Gold Chrome
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)


- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






- IP40
- 250
- 280 g
- Ø51
- 2
- TM 66

Ariel PN-F fixing frame

FIXING FRAME A01726.30



Ariel PN-F dynamic white module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE



250mA 9W
Lumen Output 3000K CRI > 90 250mA - 670 lm

33° Lens 7E4974. _ _ _ _
52° Lens 754974. _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● T DIM TO WARM 1800K / 3000K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● M2 TUNABLE WHITE 1800K / 4000K CRI > 90	● 8 Satin Gold	E Elliptical Filter
● G3 Gray		● I Gold Chrome	H Hex Louver
● C Gothic Cement		● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray		● 1 Shiny Chrome	S Softening Lens
● A6 Gray White			
● S Warm White			
● 7 White			

SUGGESTED DRIVERS (not included)

- 250mA DW (T) CC25-DM-250-N p. 42
- 250mA TW (M2) CC45-D-2x250-N p. 42

INTERCHANGEABLE ACCESSORIES




p. 260




Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION





Saturno PL

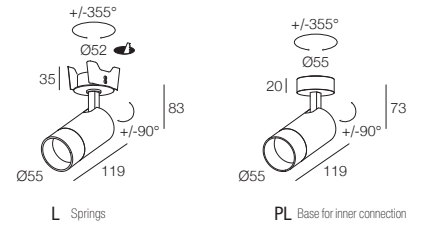

[1] 12° Lens not interchangeable

Saturno dynamic white

500mA	18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm	
33° Lens	7E4971. _ _ _ _ _
52° Lens	754971. _ _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● 8 Satin Gold ● I Gold Chrome ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens 	<ul style="list-style-type: none"> L Springs PL Base for inner connection

SUGGESTED DRIVERS (not included)


- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 470 g
- Ø51
- 2
- SD CM
- TM 66

Saturno PN-m fixing frame

FIXING FRAME A01727...0

FRAME FINISH

_ See module finish



Saturno PN-m dynamic white module

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE



500mA 18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm

33° Lens 7E4972...
52° Lens 754972...

FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- T DIM TO WARM 1800K / 3000K CRI > 90
- M2 TUNABLE WHITE 1800K / 4000K CRI > 90

DECORATIVE RING

- 4 Black
- 8 Satin Gold
- I Gold Chrome
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)


- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 450 g
- Ø51
- 2
- 2,5

Saturno PN-F fixing frame

FIXING FRAME A01726.30



Saturno PN-F dynamic white module

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE



500mA 18W
Lumen Output 3000K CRI > 90 500mA - 1650 lm

33° Lens 7E4972._____
52° Lens 754972._____

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● 8 Satin Gold ● I Gold Chrome ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens

SUGGESTED DRIVERS (not included)

- 500mA DW (T) CC25-DM-500-N p. 43
- 500mA TW (M2) CC45-D-2x500-N p. 43

INTERCHANGEABLE ACCESSORIES




p. 261




Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION





- IP40
- 48V
- 150 g
- 2
- TM 66



Ariel B Micro dim to warm

[1] 14° Lens not interchangeable

48Vdc	10W
Lumen Output 3000K CRI > 90 48Vdc - 670 lm	
33° Lens	7E4975. _ _ _ _ D
52° Lens	754975. _ _ _ _ D

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● 8 Satin Gold ● I Gold Chrome ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens 	<ul style="list-style-type: none"> D DALI

SUGGESTED DRIVERS (not included)

- 24Vdc CV70-F-24-N p. 291
- 48Vdc CV150-F-48-N p. 293

TRACKS ACCESSORIES


Micro track and accessories p. 268

INTERCHANGEABLE ACCESSORIES




p. 260

EXAMPLE CODE COMPOSITION





- IP40
- 48V
- 160 g
- 2
- TM 66



[1] 14° Lens not interchangeable

Ariel B Multi dynamic white

48Vdc	10W
Lumen Output 3000K CRI > 90 48Vdc - 670 lm	
33° Lens	7E4976. _ _ _ _ D
52° Lens	754976. _ _ _ _ D

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● 8 Satin Gold ● I Gold Chrome ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens 	<ul style="list-style-type: none"> D DALI

SUGGESTED DRIVERS (not included)

- 24Vdc CV70-F-24-N p. 291
- 48Vdc CV150-F-48-N p. 293

TRACKS ACCESSORIES


Multi track and accessories p. 272

INTERCHANGEABLE ACCESSORIES




p. 260

EXAMPLE CODE COMPOSITION





- IP40
- 48V
- 370 g
- 2
- TM 66



Saturno B Multi dynamic white

[1] 12° Lens not interchangeable

48Vdc	19W
Lumen Output 3000K CRI > 90 48Vdc - 1650 lm	
33° Lens	7E4977. _ _ _ _ D
52° Lens	754977. _ _ _ _ D

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
<ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ● 7 White 	<ul style="list-style-type: none"> ● T DIM TO WARM 1800K / 3000K CRI > 90 ● M2 TUNABLE WHITE 1800K / 4000K CRI > 90 	<ul style="list-style-type: none"> ● 4 Black ● 8 Satin Gold ● I Gold Chrome ● N Satin Nickel ● 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens 	<ul style="list-style-type: none"> D DALI

SUGGESTED DRIVERS (not included)

48Vdc CV150-F-48-N p. 293

TRACKS ACCESSORIES


Multi track and accessories p. 272

INTERCHANGEABLE ACCESSORIES




p. 260

EXAMPLE CODE COMPOSITION





- IP40
- 230V
-
-
-
- 450 g
- 2
- 2,5

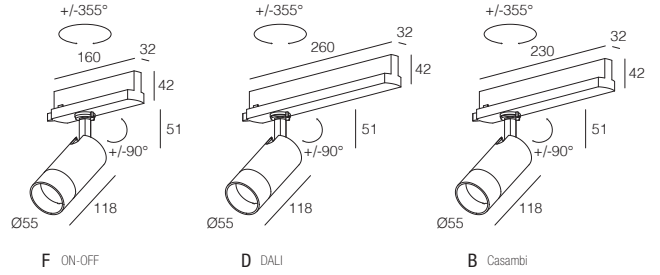

Saturno B dynamic white

[1] 12° Lens not interchangeable

220-240Vac	20W
Lumen Output 3000K CRI > 90 220-240Vac - 1650 lm	
33° Lens	7E4978. _ _ _ _ D
52° Lens	754978. _ _ _ _ D

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● T DIM TO WARM 1800K / 3000K CRI > 90	● 4 Black	W Without Filter	D DALI
● M8 Brown	● M2 TUNABLE WHITE 1800K / 4000K CRI > 90	● 8 Satin Gold	E Elliptical Filter	
● G3 Gray		● I Gold Chrome	H Hex Louver	
● C Gothic Cement		● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray		● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White				
● S Warm White				
● 7 White				

TRACKS ACCESSORIES


230Vac tracks and accessories p. 276

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 24V
- 2W
- 100 g
- 2

Eclissi Mini 360

24V 2W
Lumen Output 3000K CRI > 90 24Vdc - 60 lm
 Diffused emission **7P4967.**_ _



- | FINISH | CCT |
|-----------------------|------------------|
| X2 PVD Satin Black | U 2200K |
| Y2 PVD Polished Black | X 2700K CRI > 90 |
| T Titanium | W 3000K CRI > 90 |
| B Dark Bronze | D 4000K CRI > 90 |
| Y1 PVD Gold Chrome | |
| X4 PVD Satin Gold | |
| Z Champagne Gold | |
| X3 PVD Rose Gold | |
| Y3 PVD Shiny Chrome | |

Eclissi Mini 180


24V 2W
Lumen Output 3000K CRI > 90 24Vdc - 30 lm
 Diffused emission **7P4968.**_ _



- | FINISH | CCT |
|-----------------------|------------------|
| X2 PVD Satin Black | U 2200K |
| Y2 PVD Polished Black | X 2700K CRI > 90 |
| T Titanium | W 3000K CRI > 90 |
| B Dark Bronze | D 4000K CRI > 90 |
| Y1 PVD Gold Chrome | |
| X4 PVD Satin Gold | |
| Z Champagne Gold | |
| X3 PVD Rose Gold | |
| Y3 PVD Shiny Chrome | |

Eclissi Mini 90


24V 2W
Lumen Output 3000K CRI > 90 24Vdc - 15 lm
 Diffused emission **7P4969.**_ _



- | FINISH | CCT |
|-----------------------|------------------|
| X2 PVD Satin Black | U 2200K |
| Y2 PVD Polished Black | X 2700K CRI > 90 |
| T Titanium | W 3000K CRI > 90 |
| B Dark Bronze | D 4000K CRI > 90 |
| Y1 PVD Gold Chrome | |
| X4 PVD Satin Gold | |
| Z Champagne Gold | |
| X3 PVD Rose Gold | |
| Y3 PVD Shiny Chrome | |

Eclissi Mini 90 x 2

24V 2W
Lumen Output 3000K CRI > 90 24Vdc - 15 lm x 2
 Diffused emission **7P4979.**_ _



- | FINISH | CCT |
|-----------------------|------------------|
| X2 PVD Satin Black | U 2200K |
| Y2 PVD Polished Black | X 2700K CRI > 90 |
| T Titanium | W 3000K CRI > 90 |
| B Dark Bronze | D 4000K CRI > 90 |
| Y1 PVD Gold Chrome | |
| X4 PVD Satin Gold | |
| Z Champagne Gold | |
| X3 PVD Rose Gold | |
| Y3 PVD Shiny Chrome | |

SUGGESTED DRIVERS (not included)

ACCESSORIES

EXAMPLE CODE COMPOSITION

24Vdc CV20-F-24-N p. 291

123456 CCT FINISH



Aluminum recessed box
A01578.40




Spring mounting support
A01579.60



Eclissi Mini 360 IP67


24V 2W
 Lumen Output 3000K CRI > 90 24Vdc - 60 lm
 Diffused emission 7P4956. _ _



- | FINISH | CCT |
|--------------------|--------------------|
| ● 4 Black | ● U 2200K |
| ● T Titanium | ● X 2700K CRI > 90 |
| ● B Dark Bronze | ● W 3000K CRI > 90 |
| ● Z Champagne Gold | ● D 4000K CRI > 90 |
| ● 3 Gray | |

Eclissi Mini 180 IP67

24V 2W
 Lumen Output 3000K CRI > 90 24Vdc - 30 lm
 Diffused emission 7P4957. _ _



- | FINISH | CCT |
|--------------------|--------------------|
| ● 4 Black | ● U 2200K |
| ● T Titanium | ● X 2700K CRI > 90 |
| ● B Dark Bronze | ● W 3000K CRI > 90 |
| ● Z Champagne Gold | ● D 4000K CRI > 90 |
| ● 3 Gray | |

Eclissi Mini 90 IP67

24V 2W
 Lumen Output 3000K CRI > 90 24Vdc - 15 lm
 Diffused emission 7P4958. _ _



- | FINISH | CCT |
|--------------------|--------------------|
| ● 4 Black | ● U 2200K |
| ● T Titanium | ● X 2700K CRI > 90 |
| ● B Dark Bronze | ● W 3000K CRI > 90 |
| ● Z Champagne Gold | ● D 4000K CRI > 90 |
| ● 3 Gray | |

Eclissi Mini 90 x 2 IP67

24V 2W
 Lumen Output 3000K CRI > 90 24Vdc - 15 lm x 2
 Diffused emission 7P4959. _ _



- | FINISH | CCT |
|--------------------|--------------------|
| ● 4 Black | ● U 2200K |
| ● T Titanium | ● X 2700K CRI > 90 |
| ● B Dark Bronze | ● W 3000K CRI > 90 |
| ● Z Champagne Gold | ● D 4000K CRI > 90 |
| ● 3 Gray | |

SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 291

ACCESSORIES



Aluminum recessed box
 A01821.40



Spring mounting support
 A01833. _0


EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Eclissi 360 IP67


24V 4W
 Lumen Output: 3000K CRI > 90 24Vdc - 60 lm
 Diffused emission 7P4960._ _



- | FINISH | CCT |
|--|--|
| <ul style="list-style-type: none"> ● 4 Black ● T Titanium ● B Dark Bronze ● Z Champagne Gold ● 3 Gray | <ul style="list-style-type: none"> ● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● D 4000K CRI > 90 |

Eclissi 180 IP67


24V 4W
 Lumen Output: 3000K CRI > 90 24Vdc - 70 lm
 Diffused emission 7P4961._ _



- | FINISH | CCT |
|--|--|
| <ul style="list-style-type: none"> ● 4 Black ● T Titanium ● B Dark Bronze ● Z Champagne Gold ● 3 Gray | <ul style="list-style-type: none"> ● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● D 4000K CRI > 90 |

Eclissi 90 IP67


24V 4W
 Lumen Output: 3000K CRI > 90 24Vdc - 45 lm
 Diffused emission 7P4962._ _



- | FINISH | CCT |
|--|--|
| <ul style="list-style-type: none"> ● 4 Black ● T Titanium ● B Dark Bronze ● Z Champagne Gold ● 3 Gray | <ul style="list-style-type: none"> ● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● D 4000K CRI > 90 |

Eclissi 90 x 2 IP67

24V 4W
 Lumen Output: 3000K CRI > 90 24Vdc - 45 lm x 2
 Diffused emission 7P4963._ _




- | FINISH | CCT |
|--|--|
| <ul style="list-style-type: none"> ● 4 Black ● T Titanium ● B Dark Bronze ● Z Champagne Gold ● 3 Gray | <ul style="list-style-type: none"> ● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● D 4000K CRI > 90 |

SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 291

ACCESSORIES



Aluminum recessed box
 A01822.40



Spring mounting support
 A01834._0

EXAMPLE CODE COMPOSITION


123456 CCT FINISH

Luna Series design by Draw Studio



Luna IP65 230V

220-240Vac 7W
 Lumen Output: 3000K CRI > 90 220-240Vac - 340 lm
 Diffused Emission 7P4981. _ _ _



FINISH	CCT	CEILING CANOPY
● 4 Black	● U 2200K	● H Black
● T Titanium	● X 2700K CRI > 90	○ 7 White
● B Dark Bronze	● W 3000K CRI > 90	
● Z Champagne Gold	● D 4000K CRI > 90	
● 3 Gray		




Luna m fixing frame

FIXING FRAME A01756. _ 0

FRAME FINISH
 _ See ceiling canopy finish

Luna m IP65

24V 6W
 Lumen Output: 3000K CRI > 90 24Vdc - 340 lm
 Diffused Emission 7P4980. _ _ _



FINISH	CCT	CEILING CANOPY
● 4 Black	● U 2200K	● H Black
● T Titanium	● X 2700K CRI > 90	○ 7 White
● B Dark Bronze	● W 3000K CRI > 90	
● Z Champagne Gold	● D 4000K CRI > 90	
● 3 Gray		




Luna F fixing frame

FIXING FRAME A01636.30

Luna F IP65

24V 6W
 Lumen Output: 3000K CRI > 90 24Vdc - 340 lm
 Diffused Emission 7P4980. _ _ _



FINISH	CCT	CEILING CANOPY
● 4 Black	● U 2200K	● H Black
● T Titanium	● X 2700K CRI > 90	○ 7 White
● B Dark Bronze	● W 3000K CRI > 90	
● Z Champagne Gold	● D 4000K CRI > 90	
● 3 Gray		

SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 291


ACCESSORIES



Hole saw
 A00830.H0

EXAMPLE CODE COMPOSITION





Ariel iR IP67

500mA		9W	
Lumen Output 3000K		500mA - 750 lm	
14° Lens [1]	7Q4955	_____	_____
18° Lens	784955	_____	_____
24° Lens	7G4955	_____	_____
33° Lens	7E4955	_____	_____
52° Lens	754955	_____	_____

24V		9.5W	
Lumen Output 3000K		24Vdc - 750 lm	
14° Lens [1]	7Q4982	_____	_____
18° Lens	784982	_____	_____
24° Lens	7G4982	_____	_____
33° Lens	7E4982	_____	_____
52° Lens	754982	_____	_____


FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● 3 Gray	● B2 2400K CRI > 90	● 1 Gold Chrome	E Elliptical Filter
● 6 Stainless Steel AISI 316L	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		

[1] 14° Lens not interchangeable


SUGGESTED DRIVERS (not included)


500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES



EXAMPLE CODE COMPOSITION





Saturno iR IP67

350mA		12W	
Lumen Output 3000K		350mA - 1200 lm	
12° Lens [1]	7Q4947.	_____	_____
18° Lens	784947.	_____	_____
24° Lens	7G4947.	_____	_____
33° Lens	7E4947.	_____	_____
52° Lens	754947.	_____	_____

24V		14W	
Lumen Output 3000K		24Vdc - 1200 lm	
12° Lens [1]	7Q4983.	_____	_____
18° Lens	784983.	_____	_____
24° Lens	7G4983.	_____	_____
33° Lens	7E4983.	_____	_____
52° Lens	754983.	_____	_____



FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● 3 Gray	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● 6 Stainless Steel AISI 316L	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		

[1] 12° Lens not interchangeable


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES















EXAMPLE CODE COMPOSITION







250mA LED driver

IP20

DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC15-D-250-S	DALI 2 PUSH RIPPLE FREE AM DIMMING	1 LED 9W			 Ø 30	IP20	  
CC25-DM-250-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 LED 9W	1 LED 9W		 Ø 55	IP20	    







DRIVER TUNABLE WHITE

CODE	TYPE	@230Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC45-D-2x250-N	DALI 2 – DT8 PUSH RIPPLE FREE AM DIMMING	1 LED 9W		 Ø 85	IP20	 




500mA LED driver

IP20

DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC25-DM-500-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 LED 18W			 Ø 55	IP20	
CC70-DM-500-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 2 LED 18W	1 - 2 LED 18W		 Ø 84	IP20	

DRIVER TUNABLE WHITE

CODE	TYPE	@230Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC45-D-2x500-N	DALI 2 - DT8 PUSH RIPPLE FREE AM DIMMING	1 LED 18W		 Ø 85	IP20	


Showcase Lighting



16
Aria
Ø 9x24
1W - 2W



18
Ritmo
Ø 18x36
1W - 2W



18
Zoom
Ø 24x55
3W



19
Operaprima
18x60
4W



19
Maestro
16x54
4W



20
Sinfonia
8x8
15W/m - 25W/m



21
Armonia Bridge
14x12
12W/m - 25W/m




22
Sinfonia Mix
8x8
3W - 15W/m



23
Armonia Bridge Mix
14x12
4W - 12W/m - 25W/m


Small Recessed



26
Nano Tini i
Ø 13,5
1W




26
Gemma 18 m
Ø 18
1W - 2W




26
Gemma 35 mR
Ø 35
1W - 2W




27
Gemma 40 m
Ø 40
1W - 2W - 3W - 3W RGBW



27
Gemma 40 Am
Ø 40
1W - 2W - 3W - 3W RGBW




28
Acrobat 360
Ø 60
3W



29
Star 3
Ø 50
3W




29
Star 3 R
Ø 60
3W



30
Star 3 Am
Ø 50
3W



30
Circo 3
Ø 48
3W









































31
Zoom mR
Ø 65
3W














31
Tosca mR
Ø 65
4W



Downlights

							
Tono Am Ø 52 3W - 6W - 9W	Tono AF Ø 40 3W - 6W - 9W	Tono Super Am Ø 52 3W - 6W - 9W	Tono Super AF Ø 40 3W - 6W - 9W	Tono mR Ø 80 3W - 6W - 9W	Tono RF Ø 74 3W - 6W - 9W	Tono In&Out m Ø 78 3W - 6W - 9W	Tono In&Out F Ø 57 3W - 6W - 9W
							
Ariel Am Ø 60 9W - 13W	Ariel AF Ø 40 9W - 13W	Ariel mR Ø 90 9W - 13W	Ariel RF Ø 76 9W - 13W	Ariel In&Out m Ø 74 9W - 11W - 13W	Ariel In&Out F Ø 57 9W - 11W - 13W	Ariel Tilt 35 m Ø 85 9W - 13W	Ariel Tilt 35 F Ø 68 9W - 13W
							
Ariel Am Wall Washer Ø 60 9W - 13W	Ariel AF Wall Washer Ø 40 9W - 13W	Ariel mR Wall Washer Ø 90 9W - 13W	Ariel RF Wall Washer Ø 76 9W - 13W	Ariel In&Out m Wall Washer Ø 74 9W - 13W	Ariel In&Out F Wall Washer Ø 57 9W - 13W		
							
Saturno Am Ø 75 18W	Saturno AF Ø 57 18W	Saturno mR Ø 110 18W	Saturno RF Ø 92 18W	Saturno In&Out m Ø 95 18W	Saturno In&Out F Ø 74 18W	Saturno Tilt 35 m Ø 105 18W	Saturno Tilt 35 F Ø 85 18W
							
Saturno Am Wall Washer Ø 75 18W	Saturno AF Wall Washer Ø 57 18W	Saturno mR Wall Washer Ø 110 18W	Saturno RF Wall Washer Ø 92 18W	Saturno In&Out m Wall Washer Ø 95 18W	Saturno In&Out F Wall Washer Ø 74 18W		
							
Marte Am Ø 114 31W	Marte AF Ø 90 31W						












Surface & Pendant Lighting

							
<p>Gemma 40 N Ø 40 1W - 2W - 3W - 3W RGBW</p>	<p>Tono N Ø 47 3W - 6W - 9W</p>	<p>Pois 70 Ø 69 4W</p>	<p>Pois 100 Ø 99 6W</p>	<p>Pois 150 Ø 149 14W</p>	<p>Pois 70 m Ø 69 4W</p>	<p>Pois 100 m Ø 99 6W</p>	<p>Pois 150 m Ø 149 14W</p>
							
<p>Luna Ø 92 6W - 7W</p>	<p>Lunare Ø 92 6W - 7W</p>	<p>Cometa S8 8x8 12W/m - 25W/m</p>					










Step Lights

				
<p>Lui 35x35 1W - 2W</p>	<p>Lei Ø 35 1W - 2W</p>	<p>Lui Solovetro 35x35 1W - 2W</p>	<p>Lei Solovetro Ø 35 1W - 2W</p>	<p>Eclissi Ø 70 4W</p>




Projectors

						
<p>Nano Tini Ø 9x20 1W - 2W</p>	<p>Mini Tini Ø 18x28 1W - 2W</p>	<p>Tini Ø 28x50 1W - 2W - 3W</p>	<p>Tono Ø 40x90 3W - 6W - 9W</p>	<p>Tono P90 Ø 40x90 3W - 6W - 9W</p>		
						
<p>Ariel Ø 40x78 (84 P&P) 9W - 11W - 13W</p>	<p>Ariel PN-m Ø 40x78 (84 P&P) 9W - 11W - 13W</p>	<p>Ariel PN-F Ø 40x78 (84 P&P) 9W - 11W - 13W</p>	<p>Saturno Ø 55x119 (108 P&P) 18W</p>	<p>Saturno PN-m Ø 55x119 (108 P&P) 18W</p>	<p>Saturno PN-F Ø 55x119 (108 P&P) 18W</p>	














Low Voltage Track Projectors

				
<p>Mini Tini B Micro Ø 18x30 2W - 3W</p>	<p>Tini B Micro Ø 28x76 4W</p>	<p>Tono B Micro Ø 40x90 3W - 7W - 10W</p>	<p>Ariel B Micro Ø 40x78 (84 P&P) 10W - 12W - 14W</p>	
				
<p>Mini Tini B Multi Ø 18x28 2W - 3W</p>	<p>Tini B Multi Ø 28x76 4W</p>	<p>Tono B Multi Ø 40x90 3W - 7W - 10W</p>	<p>Ariel B Multi Ø 40x78 (84 P&P) 10W - 12W - 14W</p>	<p>Saturno B Multi Ø 55x119 (108 P&P) 19W</p>













Mains Voltage Track Projectors

		
<p>Saturno B Ø 55x118 (108 P&P) 20W - 25W</p>	<p>Saturno BF Ø 55x118 (108 P&P) 20W - 25W</p>	<p>Marte B Ø 91x146 (175 P&P) 35W - 42W</p>
























Track & Surface Zoom Projectors

							
<p>Tono Zoom B Micro Ø 50x95 10W</p>	<p>Tono Zoom Ø 50x95 9W</p>	<p>Ariel Contour B Micro Ø 38x123 10W</p>	<p>Ariel Contour B Multi Ø 38x123 10W</p>	<p>Ariel Contour Ø 38x123 9W</p>			
							
<p>Aurora Zoom 1500 Ø 61x140 18W</p>	<p>Aurora Zoom 1500 F Ø 61x140 18W</p>	<p>Aurora Zoom 1500 PL Ø 61x140 15W</p>	<p>Aurora Zoom 1500 mP Ø 61x140 15W</p>	<p>Aurora Zoom 3000 Ø 80x140 30W</p>	<p>Aurora Zoom 3000 F Ø 80x140 30W</p>	<p>Aurora Zoom 3000 PL Ø 80x140 25W</p>	<p>Aurora Zoom 3000 mP Ø 80x140 25W</p>

Solovetro Series

<p>132</p> 	<p>132</p> 	<p>133</p> 	<p>133</p> 	<p>134</p> 	<p>134</p> 	<p>136</p> 	<p>137</p> 
<p>Gemma 20 IP67 Solovetro Ø 23</p>	<p>Gemma 35 IP67 Solovetro Ø 35</p>	<p>Astro 80 IP67 Solovetro Ø 80</p>	<p>Nesis IP67 Solovetro Ø 80</p>	<p>Tono i IP67 Solovetro Ø 59</p>	<p>Odino IP67 Solovetro Ø 59</p>	<p>Ariel i IP67 Solovetro Ø 59</p>	<p>Saturno i IP67 Solovetro Ø 80</p>
<p>1W - 2W</p>	<p>1W - 2W - 3W</p>	<p>1W - 2W - 3W</p>	<p>3W - 6W - 3W RGB</p>	<p>3W - 6W - 7W</p>	<p>6W </p>	<p>9W - 9,5W</p>	<p>12W - 14W</p>
<p>135</p> 	<p>135</p> 	<p>138</p> 	<p>138</p> 	<p>139</p> 	<p>139</p> 		
<p>Triuum i IP67 Solovetro 137x47</p>	<p>Triuum i IP67 Solovetro 230V 137x47</p>	<p>Passo IP67 44x44</p>	<p>Passo IP67 m 44x44</p>	<p>Lui IP67 Solovetro 35x35</p>	<p>Lei IP67 Solovetro Ø 35</p>		
<p>7W RGBW - 7W - 15W</p>	<p>8W</p>	<p>2W - 3W</p>	<p>2W - 3W</p>	<p>1W - 2W</p>	<p>1W - 2W</p>		

Recessed Lights

<p>142</p>  <p>Gemma 20 IP67 Ø 23 1W - 2W</p>	<p>142</p>  <p>Gemma 20 IP67 m Ø 23 1W - 2W</p>	<p>143</p>  <p>Gemma 35 IP67 Ø 35 1W - 2W - 3W</p>	<p>143</p>  <p>Gemma 35 IP67 m Ø 35 1W - 2W - 3W</p>	<p>144</p>  <p>Gemma 35 IP67 GS Ø 35 1W - 2W</p>	<p>144</p>  <p>Arco 60 i Ø 59 3W - 3W RGBW</p>	<p>145</p>  <p>Astro 80 Ø 80 1W - 2W - 3W</p>
<p>146</p>  <p>Odino 6 i Ø 59 6W ←</p>	<p>146</p>  <p>Odino 15 i Ø 80 15W ←</p>	<p>148</p>  <p>Tono i IP67 GS Ø 60 6W - 7W</p>	<p>148</p>  <p>Tono i IP67 Ø 60 3W - 6W - 7W</p>	<p>149</p>  <p>Tono im IP67 Ø 60 3W - 6W - 7W</p>	<p>147</p>  <p>Nesis H65 Ø 80 3W - 6W - 3W RGB</p>	<p>147</p>  <p>Nesis H65 m Ø 80 3W - 6W - 3W RGB</p>
<p>150</p>  <p>Ariel i IP67 Ø 63 9W - 9,5W</p>	<p>151</p>  <p>Ariel i IP67 Wall Washer Ø 63 9W - 9,5W</p>	<p>152</p>  <p>Saturno i IP67 Ø 85 12W - 14W</p>	<p>153</p>  <p>Saturno i IP67 Wall Washer Ø 85 12W - 14W</p>			
<p>154</p>  <p>Giove 3S R Ø 90 3W</p>	<p>155</p>  <p>Giove 7S R Ø 110 7W</p>	<p>156</p>  <p>Tono iR IP67 Ø 99 3W - 6W - 7W</p>	<p>157</p>  <p>Triuum i IP67 150x60 7W RGBW - 7W - 15W</p>	<p>157</p>  <p>Triuum i IP67 230V 150x60 8W</p>		

Surface Lighting

















161 	161 	161 
Pois 70 IP67 Ø 69 4W	Pois 100 IP67 Ø 99 6W	Pois 150 IP67 Ø 149 14W

162 	162 	163 	163 	164 	164 	165 	165 
Eco IP67 39x57x97 h 1W - 2W	Eco IP67 39x57x122 h 1W x 2 - 2W x 2	Kumini IP67 Ø39x105x108 h 3W	Kumini IP67 Ø39x105x162 h 3W x 2	Kumi IP67 Ø55x108x108 h 6W	Kumi IP67 Ø55x108x162 h 6W x 2	Kumax IP67 Ø75x147x108 h 14W	Kumax IP67 Ø75x147x162 h 14W x 2











Step Lights

168 	168 	169 	169 	170 	170 	172 	173 
Lui IP67 35x35 1W - 2W	Lei IP67 Ø 35 1W - 2W	Ridi Ø 40 1W - 2W	Odino ASY IP67 Ø 59 6W 	Piega 80 IP67 80x80 2W	Piega 140 IP67 140x80 4W	Arco 50 iL Ø 50 1W - 2W	Discovery Ø 100 4W - 4W x 2 - 4W x 3

Projectors

 <p>177</p> <p>Milli</p> <p>Ø 20x49</p> <p>2,5W</p>	 <p>178</p> <p>Micro</p> <p>Ø 33x64</p> <p>3W - 4W</p>	 <p>179</p> <p>Macro IP67</p> <p>Ø 49x76</p> <p>3W - 6W - 7W - 9W</p>	 <p>180</p> <p>Micro 230V</p> <p>Ø 33x64</p> <p>4W</p>	 <p>181</p> <p>Macro IP67 230V</p> <p>Ø 49x76</p> <p>3W - 6W - 10W</p>	 <p>182</p> <p>Ariel P IP67</p> <p>Ø 49x114</p> <p>9W - 9,5W - 13W</p>	 <p>183</p> <p>Saturno P IP67</p> <p>Ø 62x140</p> <p>12W - 14W - 18W</p>
 <p>184</p> <p>Odino 6 P</p> <p>Ø 50x107</p> <p>6W </p>	 <p>184</p> <p>Odino 15 P</p> <p>Ø 66x114</p> <p>15W </p>	 <p>185</p> <p>Quantum P</p> <p>Ø 80x148</p> <p>12W - 14W - 18W</p>	 <p>185</p> <p>Quantum P 230V</p> <p>Ø 80x148</p> <p>15W - 20W</p>	 <p>186</p> <p>Triuum P IP67</p> <p>137x47</p> <p>7W RGBW - 7W - 15W</p>	 <p>187</p> <p>Triuum P IP67 230V</p> <p>137x47</p> <p>8W</p>	 <p>187</p> <p>Maestro P IP67</p> <p>134x26</p> <p>6W</p>

Bollards

 <p>190</p> <p>Spillo IP67</p> <p>Ø 8</p> <p>1W - 2W</p>	 <p>190</p> <p>Spillo L IP67</p> <p>Ø 8</p> <p>1W - 2W</p>	 <p>191</p> <p>Spillo T IP67</p> <p>Ø 37</p> <p>1W - 2W</p>	 <p>191</p> <p>Spillo LT IP67</p> <p>Ø 75</p> <p>1W - 2W</p>	 <p>192</p> <p>Micro H350 Micro H500</p> <p>h 350 - h 500</p> <p>3W - 4W</p>	 <p>193</p> <p>Macro H350 Macro H500</p> <p>h 350 - h 500</p> <p>3W - 6W - 7W - 9W</p>
 <p>194</p> <p>Ted</p> <p>h 350 - h 600</p> <p>6W</p>	 <p>194</p> <p>Ted T</p> <p>h 600</p> <p>6W x 2</p>	 <p>195</p> <p>Ted Z</p> <p>h 900</p> <p>6W x 2</p>	 <p>177</p> <p>Milli</p> <p>h 350</p> <p>2,5W</p>	 <p>182</p> <p>Ariel P IP67</p> <p>h 350</p> <p>9W - 9,5W - 13W</p>	 <p>183</p> <p>Saturno P IP67</p> <p>h 350</p> <p>12W - 14W - 18W</p>

IP68 Recessed



IP68 Projectors



Symmetric Linear

IP40

						
208 Cometa Q4 4,5x4,5 4W/m - 8W/m - 14W/m	210 Cometa Q8 8x8 8W/m > 23W/m	212 Cometa LC 14x12 8W/m > 23W/m	214 Armonia 8x14 14x8 8W/m > 23W/m	216 Armonia 14x12 8W/m > 23W/m	218 Armonia Linear Lens 14x12 8W/m > 23W/m	220 Armonia Curva 14x17 15W/m - 30W/m

IP67

		
222 Cometa Q8 IP67 8x8 8W/m > 23W/m	224 Cometa LC IP67 14x12 8W/m > 23W/m	226 Meteora Flex IP65 13x7 18W/m

Asymmetric Linear

IP40

				
230 Cometa NGL 10x10 8W/m > 23W/m	232 Cometa NGL Tuttaluce 10,5x11 8W/m > 23W/m	234 Armonia NGL 30 15,5x16,5 8W/m > 23W/m	236 Armonia Wall Washer 14x12 8W/m > 23W/m	238 Nova 20x15 8W/m > 30W/m

Linear with Lenses

IP40

					
242 Q8 Lenti 8x8 25W/m	244 Armonia Lenti 14x12 12W/m - 24W/m	246 Armonia Louver 14x18 25W/m	248 Armonia Mix 14x12 4W/m - 12W/m - 23W/m	220 Armonia Curva Lens 14x17 30W/m	250 Continuum 43x29 9W > 63W

IP67

		
252 Continuum IP67 46-60x47 9W > 50W	254 Continuum IP67 Louver 46-60x47 9W > 50W	256 Continuum i IP67 Louver 53-67x47 9W > 40W



260
Accessori intercambiabili
Interchangeable accessories



264
Strutture per incassi a filo
Frame for trimless downlights



266
Connettori stagni IP68
Watertight connectors IP68



267
Cavi elettrici e di segnale
Signal and electric cables



267
Scatole di derivazione
Junction boxes



268
Micro Binari
Micro Tracks



272
Multi Binari
Multi Tracks



276
Binari 230Vac
230Vac tracks



DRIVERS
 350mA 282
 400mA 283
 500mA 284
 600mA 285
 700mA 286
 900mA 287
 1000mA 287



DRIVERS
 12Vdc 290
 24Vdc 291
 48Vdc 293



LED converters



295
Dimmer e interfacce
Dimmers and interfaces



297
Sistemi di emergenza
Emergency systems

DGA

Showcase Lighting


INNOVAZIONE CREATIVA PER L'ESPOSIZIONE

La gamma Showcase Lighting è progettata per esaltare vetrine e spazi espositivi, fondendo eleganza, tecnologia all'avanguardia e versatilità d'uso. Ogni prodotto della categoria si distingue per l'eccellente qualità dei materiali, un design accurato e la capacità di adattarsi alle specifiche esigenze progettuali. Grazie alla varietà delle soluzioni offerte, è possibile creare atmosfere uniche, mettendo in risalto dettagli fondamentali e valorizzando ogni singolo oggetto esposto.

CREATIVE INNOVATION FOR DISPLAY

The Showcase Lighting range is designed to enhance windows and exhibition spaces, blending elegance, cutting-edge technology, and versatility of use. Each product in this category stands out for its excellent material quality, meticulous design, and ability to adapt to the specific needs of design requirements. Thanks to the variety of solutions offered, it is possible to create unique atmospheres, highlighting essential details and enhancing every single exhibited item.






Aria 1

350 / 500mA <small>Lumen Output 3000K CRI > 90</small>	1W 350mA - 50 lm	2W 500mA - 80 lm
20° Lens	784475. __	784476. __
30° Lens	764475. __	764476. __
50° Lens	7D4475. __	7D4476. __

FINISH	CCT
● 4 Black	● U 2200K
● I Gold Chrome	● X 2700K CRI > 90
● Z Champagne Gold	● W 3000K CRI > 90
● 3 Gray	● K 3500K CRI > 90
● 1 Shiny Chrome	● D 4000K CRI > 90



Aria 2

350 / 500mA <small>Lumen Output 3000K CRI > 90</small>	1W x 2 350mA - 50 lm x 2	2W x 2 500mA - 80 lm x 2
20° Lens	784477. __	784478. __
30° Lens	764477. __	764478. __
50° Lens	7D4477. __	7D4478. __


FINISH	CCT
● 4 Black	● U 2200K
● I Gold Chrome	● X 2700K CRI > 90
● Z Champagne Gold	● W 3000K CRI > 90
● 3 Gray	● K 3500K CRI > 90
● 1 Shiny Chrome	● D 4000K CRI > 90

SUGGESTED DRIVERS (not included)

350mA	CC20-F-350-N	p. 282
500mA	CC20-F-500-N	p. 284

EXAMPLE CODE COMPOSITION



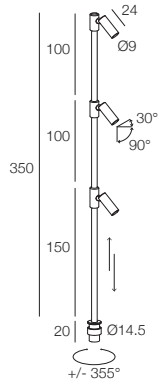

Aria 3

350 / 500mA <small>Lumen Output 3000K CRI > 90</small>	1W x 3 350mA - 50 lm x 3	2W x 3 500mA - 80 lm x 3
20° Lens	784479._ _	784480._ _
30° Lens	764479._ _	764480._ _
50° Lens	7D4479._ _	7D4480._ _

FINISH

- 4 Black
- I Gold Chrome
- Z Champagne Gold
- 3 Gray
- 1 Shiny Chrome

CCT


- U 2200K
- X 2700K CRI > 90
- W 3000K CRI > 90
- K 3500K CRI > 90
- D 4000K CRI > 90

SUGGESTED DRIVERS (not included)

- 350mA **CC20-F-350-N** p. 282
- 500mA **CC20-F-500-N** p. 284

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



Ritmo

	350 / 500mA <small>Lumen Output 3000K CRI > 90</small>	1W 350mA - 80 lm	2W 500mA - 110 lm
10° Lens		733884._ _	733885._ _
25° Lens		7G3884._ _	7G3885._ _
40° Lens		743884._ _	743885._ _
60° Lens		753884._ _	753885._ _

FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● X 2700K CRI > 90
● Z Champagne Gold	● W 3000K CRI > 90
● 3 Gray	● K 3500K CRI > 90
	● D 4000K CRI > 90
	● 1 5000K



Zoom

	900mA <small>Lumen Output 3000K</small>	3W 900mA - 70 lm
10° > 40° Zoom Lens		7Z4921._ _


FINISH	CCT
● 4 Black	● Y 2700K
● T Titanium	● 6 3000K
● 3 Gray	● W 3000K CRI > 90
	● 9 4000K
	● 1 5000K

SUGGESTED DRIVERS (not included)

350mA	CC20-F-350-N	p. 282
500mA	CC20-F-500-N	p. 284
900mA	CC20-F-900-N	p. 287

EXAMPLE CODE COMPOSITION



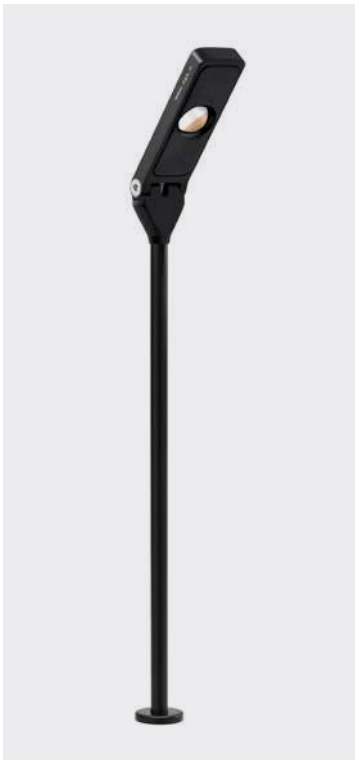


Operaprima

350mA	4W
Lumen Output 3000K	350mA - 400 lm
60° Lens	753529._ _

Operaprima with snoot

350mA	4W
Lumen Output 3000K	350mA - 360 lm
60° Lens	753554._ _

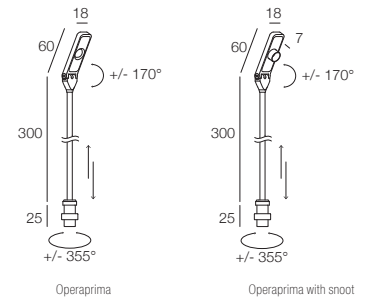


FINISH	CCT
● 4 Black	● Y 2700K
● Z Champagne Gold	● 6 3000K
● 3 Gray	● W 3000K CRI > 90
○ 7 White	● 9 4000K
	● 1 5000K



Maestro

350mA	4W
Lumen Output 3000K	350mA - 400 lm
10° Lens	733612._ _
30° Lens	763612._ _
40° Lens	743612._ _
60° Lens	753612._ _
Elliptical Lens	773612._ _
Accent	7T3612._ _
Fade	7U3612._ _
Soft	7V3612._ _




FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● Z Champagne Gold	● X 2700K CRI > 90
● 3 Gray	● 6 3000K
	● W 3000K CRI > 90
	● 9 4000K
	● D 4000K CRI > 90
	● 1 5000K

SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N p. 282

EXAMPLE CODE COMPOSITION


123456 CCT FINISH




Sinfonia opal cover

12V 15W/m
 Lumen Output: 3000K CRI > 90 12Vdc - 750 lm/m
 Opal Cover SR1P1-_-_-_-_-

OPTIMIZED LENGTH (cm)	FINISH	CCT
030 033 036 039	● 4 Black	● U 2200K
042 045 048 051	● 3 Gray	● X 2700K CRI > 90
054 057 060 063		● W 3000K CRI > 90
066 069 072 075		● K 3500K CRI > 90
078 081 084 087		● D 4000K CRI > 90
090 093 096 099		
102		



L = Length not including poles with magnetic joint




Sinfonia lenti

12V 25W/m
 Lumen Output: 3000K CRI > 90 12Vdc - 1300 lm/m
 20° Lens SR381-_-_-_-_-
 30° Lens SR361-_-_-_-_-
 50° Lens SR3D1-_-_-_-_-

OPTIMIZED LENGTH (cm)	FINISH	CCT
030 039 048 057	● 4 Black	● U 2200K
066 075 084 093	● 3 Gray	● X 2700K CRI > 90
102		● W 3000K CRI > 90
		● K 3500K CRI > 90
		● D 4000K CRI > 90



L = Length not including poles with magnetic joint

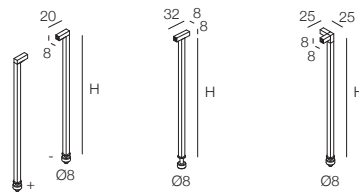




SUGGESTED DRIVERS (not included)

12Vdc CV70-F-12-N p. 290

	Linear pole (2 pcs)	T pole	Corner pole
H 18 cm	A00839_0	A00928_0	A00932_0
H 23 cm	A00840_0	A00929_0	A00933_0
H 28 cm	A00841_0	A00930_0	A00934_0
H 33 cm	A00842_0	A00931_0	A00935_0

FINISH
● 4 Black
● 3 Gray





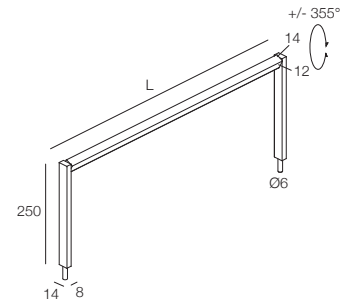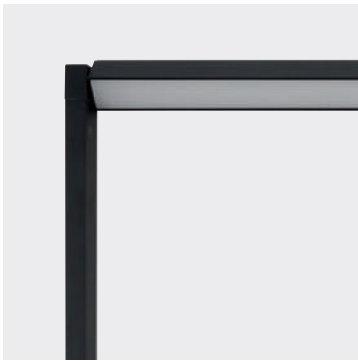

Armonia Bridge opal cover

24V Lumen Output 3000K CRI > 90	12W/m	25W/m
	24Vdc - 650 lm/m	24Vdc - 1300 lm/m
Opal Cover	AP125-_____	AP225-_____


OPTIMIZED LENGTH (cm)	FINISH	CCT
031 034 037 040	● 4 Black	● U 2200K
043 046 049 052	● 3 Gray	● Q 2500K
055 058 061 064		● X 2700K CRI > 90
067 070 073 076		● W 3000K CRI > 90
079 082 085 088		● K 3500K CRI > 90
091 094 097 100		● D 4000K CRI > 90
103 106 109 112		● 1 5000K
115 118		

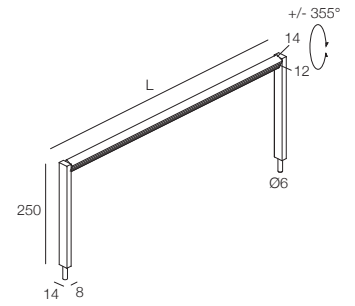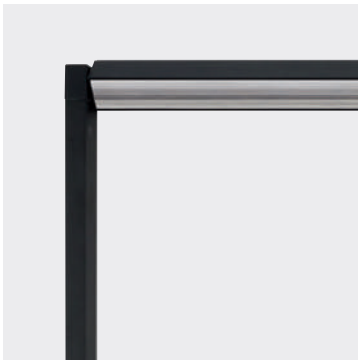

Armonia Bridge linear lens

24V Lumen Output 3000K CRI > 90	12W/m	25W/m
	24Vdc - 950 lm/m	24Vdc - 1700 lm/m
40° Linear Lens	AQ125-_____	AQ225-_____

OPTIMIZED LENGTH (cm)	FINISH	CCT
031 034 037 040	● 4 Black	● U 2200K
043 046 049 052	● 3 Gray	● Q 2500K
055 058 061 064		● X 2700K CRI > 90
067 070 073 076		● W 3000K CRI > 90
079 082 085 088		● K 3500K CRI > 90
091 094 097 100		● D 4000K CRI > 90
103 106 109 112		● 1 5000K
115 118		

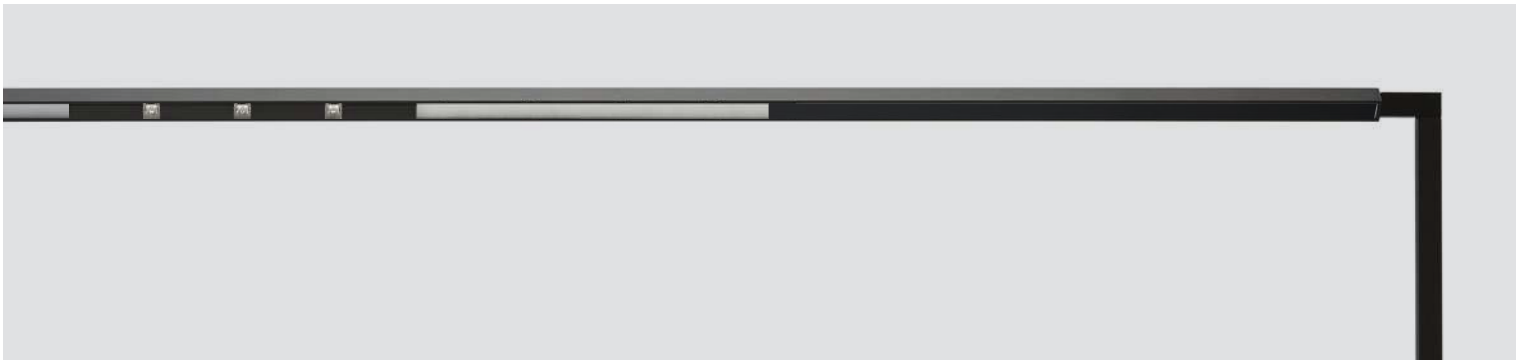

Sinfonia Mix

Customize your modular configuration, adapting it to every space, shape and size.

Module with lenses - Module with lenses and snoot

POWER LED	OPTIC	FINISH	CCT
3W 12Vdc	20° Lens	● 4 Black	● U 2200K
	30° Lens	● 3 Gray	● X 2700K CRI > 90
	50° Lens		● W 3000K CRI > 90
			● K 3500K CRI > 90
			● D 4000K CRI > 90



Diffuse light module

POWER LED	OPTIC	FINISH	CCT
15W/m 12Vdc	Opal Cover	● 4 Black	● U 2200K
		● 3 Gray	● X 2700K CRI > 90
			● W 3000K CRI > 90
			● K 3500K CRI > 90
			● D 4000K CRI > 90




Blind module

FINISH
● 4 Black
● 3 Gray



Poles

POLE SIZES	FINISH
H 18 cm	● 4 Black
H 23 cm	● 3 Gray
H 28 cm	
H 33 cm	

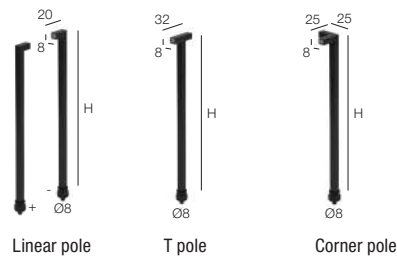



Armonia Bridge Mix

Design your own light with the configurable modules

Module with lenses - Module with lenses and snoot

POWER LED	OPTIC	FINISH	CCT
4W 24Vdc - 400 lm output	10° Lens	● 4 Black	● X 2700K CRI > 90
	30° Lens	● 3 Gray	● W 3000K CRI > 90
6W (Dimmable) 24Vdc - 400 lm output	40° Lens		● D 4000K CRI > 90
	60° Lens		● 1 5000K
	Elliptical Lens		

MODULE WITH LENSES



MODULE WITH LENSES AND SNOOT





Diffuse light module

POWER LED	OPTIC	FINISH	CCT
12W/m 24Vdc - 650 lm/m output	Opal Cover	● 4 Black	● U 2200K
25W/m 24Vdc - 1300 lm/m output		● 3 Gray	● Q 2500K
			● X 2700K CRI > 90
			● W 3000K CRI > 90
			● K 3500K CRI > 90
			● D 4000K CRI > 90
			● 1 5000K



Mini Tini Module

POWER LED	OPTIC	FINISH	CCT
1W 24Vdc - 80 lm output	10° Lens	● 4 Black	● U 2200K
	25° Lens	● 3 Gray	● X 2700K CRI > 90
2W 24Vdc - 110 lm output	40° Lens		● W 3000K CRI > 90
	60° Lens		● 9 4000K
			● 1 5000K



Blind module

FINISH
● 4 Black
● 3 Gray



Small Recessed


PICCOLE DIMENSIONI, GRANDE IMPATTO

Tra le prime creazioni di DGA si distinguono gli apparecchi ad incasso di piccole dimensioni e quelli per vetrina, progettati per valorizzare spazi commerciali e museali. I piccoli incassi, dal design minimalista, offrono un'illuminazione mirata, ideale per esaltare nicchie e vetrine, rendendo ogni ambiente unico e affascinante. La loro versatilità li rende soluzioni perfette anche per spazi di dimensioni contenute.

SMALL SIZE, BIG IMPACT

Among DGA's first creations are the small recessed and the luminaires designed for display cases, aimed at enhancing commercial and museum spaces. The small recessed, with their minimalist design, provide targeted lighting, ideal for highlighting niches and showcases, making every environment unique and captivating. Their versatility makes them perfect solutions even for smaller spaces.



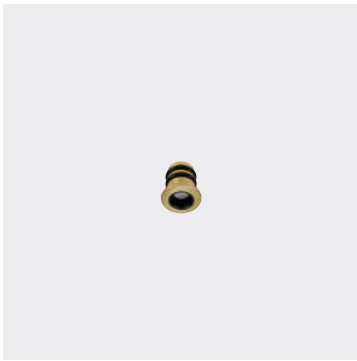

IP40
 350
 1W
 8 g
 Ø10,5
 2



Nano Tini i

350mA	1W
Lumen Output 3000K CRI > 90 350mA - 50 lm	
20° Lens	784013._ _
30° Lens	764013._ _
50° Lens	7D4013._ _

FINISH	CCT
● 4 Black	● U 2200K
● E Massive Brass	● X 2700K CRI > 90
● I Gold Chrome	● W 3000K CRI > 90
● 3 Gray	● K 3500K CRI > 90
● 1 Shiny Chrome	● D 4000K CRI > 90
○ 7 White	



IP40
 350 / 500
 1W
 2W
 15 g
 Ø14
 2




Gemma 18 m

350 / 500mA	1W	2W
Lumen Output 3000K CRI > 90 350mA - 80 lm 500mA - 110 lm		
10° Lens	734029._ _	734030._ _
25° Lens	764029._ _	764030._ _
40° Lens	744029._ _	744030._ _
130° Emission	704029._ _	704030._ _
Elliptical Lens	774029._ _	774030._ _

FINISH	CCT
● 4 Black	● U 2200K
● B1 Bronze	● X 2700K CRI > 90
● 3 Gray	● W 3000K CRI > 90
● 1 Shiny Chrome	● D 4000K CRI > 90
○ 7 White	



IP40
 350 / 500
 1W
 2W
 40 g
 Ø30
 2



Gemma 35 mR

350 / 500mA	1W	2W
Lumen Output 3000K CRI > 90 350mA - 80 lm 500mA - 110 lm		
10° Lens	734263._ _	734264._ _
25° Lens	764263._ _	764264._ _
40° Lens	744263._ _	744264._ _

FINISH	CCT
● 4 Black	● U 2200K
● B1 Bronze	● X 2700K CRI > 90
● 3 Gray	● W 3000K CRI > 90
● 1 Shiny Chrome	● D 4000K CRI > 90
○ 7 White	

SUGGESTED DRIVERS (not included)

- 350mA CC20-F-350-N p. 282
- 500mA CC20-F-500-N p. 284

EXAMPLE CODE COMPOSITION





Gemma 40 m

350 / 500 / 700mA	1W	2W	3W	3W RGBW
Lumen Output 3000K	350mA - 75 lm	500mA - 100 lm	350mA - 180 lm	700mA - 50 lm
10° Lens	734161._ _	734162._ _		
30° Lens	764161._ _	764162._ _		764925._ 7
60° Lens	754161._ _	754162._ _	754163._ _	
Frosted Glass	714161._ _	714162._ _	714163._ _	714925._ 7
Transparent Glass	724161._ _	724162._ _	724163._ _	

FINISH	CCT
● 4 Black	● U 2200K
● B1 Bronze	● Y 2700K
● 3 Gray	● 6 3000K
● 1 Shiny Chrome	● W 3000K CRI > 90
○ 7 White	● 9 4000K
	● 1 5000K
	● 7 RGBW

RGBW available on some products only



Gemma 40 Am

350 / 500 / 700mA	1W	2W	3W	3W RGBW
Lumen Output 3000K	350mA - 100 lm	500mA - 130 lm	350mA - 260 lm	700mA - 50 lm
10° Lens	734171._ _	734172._ _		
30° Lens	764171._ _	764172._ _		764926._ 7
60° Lens	754171._ _	754172._ _	754173._ _	
Frosted Glass	714171._ _	714172._ _	714173._ _	714926._ 7
Transparent Glass	724171._ _	724172._ _	724173._ _	

FINISH	CCT
● 4 Black	● U 2200K
● B1 Bronze	● Y 2700K
● 3 Gray	● 6 3000K
● 1 Shiny Chrome	● W 3000K CRI > 90
○ 7 White	● 9 4000K
	● 1 5000K
	● 7 RGBW

RGBW available on some products only

SUGGESTED DRIVERS (not included)

RGBW	CC50-X-700-NL	p. 286
350mA	CC20-F-350-N	p. 282
500mA	CC20-F-500-N	p. 284


EXAMPLE CODE COMPOSITION





Acrobat 360 with flat laminated springs

	Without Snoot	With Snoot
350mA Lumen Output 3000K	3W 350mA - 300 lm	3W 350mA - 300 lm
15° Lens	7A4269._ _	7A4273._ _
30° Lens	764269._ _	764273._ _
60° Lens	754269._ _	754273._ _
Elliptical Lens	774269._ _	774273._ _



FINISH

- 4 Black
- B1 Bronze
- 3 Gray
- 7 White


CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K



Acrobat 360 with springs

	Without Snoot	With Snoot
350mA Lumen Output 3000K	3W 350mA - 300 lm	3W 350mA - 300 lm
15° Lens	7A4268._ _	7A4272._ _
30° Lens	764268._ _	764272._ _
60° Lens	754268._ _	754272._ _
Elliptical Lens	774268._ _	774272._ _




FINISH

- 4 Black
- B1 Bronze
- 3 Gray
- 7 White

CCT


- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K



Star 3 with flat laminated springs

350mA	3W
Lumen Output 3000K	350mA - 300 lm
15° Lens	7A4159._ _
30° Lens	764159._ _
60° Lens	754159._ _
Elliptical Lens	774159._ _


FINISH	CCT
● 4 Black	● U 2200K
● B1 Bronze	● Y 2700K
● 3 Gray	● 6 3000K
○ 7 White	● W 3000K CRI > 90
	● 9 4000K



Star 3 with springs

350mA	3W
Lumen Output 3000K	350mA - 300 lm
15° Lens	7A4265._ _
30° Lens	764265._ _
60° Lens	754265._ _
Elliptical Lens	774265._ _


FINISH	CCT
● 4 Black	● U 2200K
● B1 Bronze	● Y 2700K
● 3 Gray	● 6 3000K
○ 7 White	● W 3000K CRI > 90
	● 9 4000K



Star 3 R with flat laminated springs

350mA	3W
Lumen Output 3000K	350mA - 300 lm
15° Lens	7A4160._ _
30° Lens	764160._ _
60° Lens	754160._ _
Elliptical Lens	774160._ _

FINISH	CCT
● 4 Black	● U 2200K
● B1 Bronze	● Y 2700K
● 3 Gray	● 6 3000K
○ 7 White	● W 3000K CRI > 90
	● 9 4000K

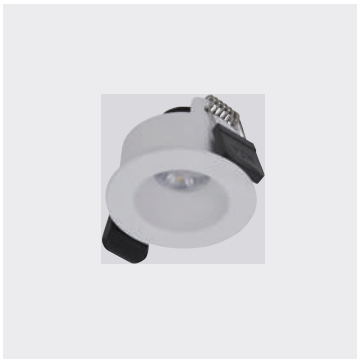


IP40 350 83 g Ø44 2




Star 3 Am IP40

350mA	3W
Lumen Output 3000K	350mA - 350 lm
15° Lens	7A4157._ _
30° Lens	764157._ _
60° Lens	754157._ _
Elliptical Lens	774157._ _

FINISH	CCT
● H Black	● U 2200K
● B1 Bronze	● Y 2700K
● 3 Gray	● 6 3000K
○ 7 White	● W 3000K CRI > 90
	● 9 4000K

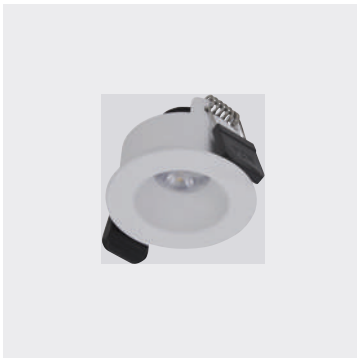


IP55 350 83 g Ø44 2



Star 3 Am IP55

350mA	3W
Lumen Output 3000K	350mA - 350 lm
15° Lens	7A4158._ _
30° Lens	764158._ _
60° Lens	754158._ _
Elliptical Lens	774158._ _

FINISH	CCT
● H Black	● U 2200K
● B1 Bronze	● Y 2700K
● 3 Gray	● 6 3000K
○ 7 White	● W 3000K CRI > 90
	● 9 4000K

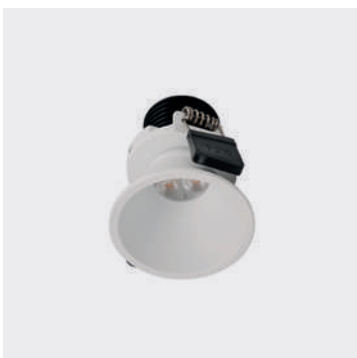

IP40 350 65 g Ø45 2



Circo 3

350mA	3W
Lumen Output 3000K	350mA - 340 lm
15° Lens	7A3177.7 _
30° Lens	763177.7 _
60° Lens	753177.7 _
Elliptical Lens	773177.7 _

FINISH	CCT
○ 7 White	● U 2200K
	● Y 2700K
	● 6 3000K
	● W 3000K CRI > 90
	● 9 4000K



Zoom mR

900mA
Lumen Output 3000K
3W
900mA - 70 lm
10° > 40°
Zoom Lens


7Z4922._ _

FINISH

- 4 Black
- 3 Gray
- 7 White

CCT

- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K



Tosca mR IP40

350mA
Lumen Output 3000K
10° Lens
30° Lens
50° Lens


4W
350mA - 430 lm
734845._ _
764845._ _
7D4845._ _

FINISH

- H Black
- B1 Bronze
- 3 Gray
- 7 White

CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K



Tosca mR IP55

350mA
Lumen Output 3000K
10° Lens
30° Lens
50° Lens


4W
350mA - 430 lm
734850._ _
764850._ _
7D4850._ _

FINISH

- H Black
- B1 Bronze
- 3 Gray
- 7 White

CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K



SUGGESTED DRIVERS (not included)

- 350mA CC20-F-350-N p. 282
- 900mA CC20-F-900-N p. 287

EXAMPLE CODE COMPOSITION



Downlights

I downlights DGA si distinguono per le loro elevate prestazioni tecniche, risultando perfetti per esaltare sia le architetture che i dettagli stilistici degli spazi. Questi apparecchi a incasso, caratterizzati da un design minimalista e privi di viti visibili sulla parte frontale, si integrano con naturalezza in ogni contesto, contribuendo a creare atmosfere di grande effetto visivo. Progettati per un mercato in costante evoluzione, questi prodotti sono in grado di adattarsi alle nuove tendenze e alle varie esigenze progettuali, offrendo sempre soluzioni innovative e all'avanguardia.

DGA downlights stand out for their high technical performance, making them perfect for enhancing both the architecture and the stylistic details of spaces. These recessed fixtures, characterised by a minimalist design and without visible screws on the front, integrate naturally into any context, helping to create atmospheres with a great visual effect. Designed for a constantly evolving market, these products are able to adapt to new trends and various design needs, always offering innovative and cutting-edge solutions.





IP40 500 700 900 150 g Ø46 2

Ø46
74 - 3W/6W
86 - 9W
Ø52

Tono Am IP40

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 230 lm	500mA - 520 lm	700mA - 670 lm
3° Lens	7T3764._ _		
10° Lens		733765._ _	733766._ _
30° Lens		763765._ _	763766._ _
50° Lens		7D3765._ _	7D3766._ _

FINISH	CCT
● H Black	● U 2200K
● C Gothic Cement	● Y 2700K
● K Corten	● 6 3000K
● A Gold	● W 3000K CRI > 90
● L Oyster White	● J 3500K
○ 7 White	● 9 4000K



IP55 500 700 900 150 g Ø46 2

Ø46
85 - 3W
97 - 6W/9W
Ø52

Tono Am IP55

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 180 lm	500mA - 500 lm	700mA - 660 lm
3° Lens	7T3802._ _		
10° Lens		733803._ _	733804._ _
30° Lens		763803._ _	763804._ _
50° Lens		7D3803._ _	7D3804._ _

FINISH	CCT
● H Black	● U 2200K
● C Gothic Cement	● Y 2700K
● K Corten	● 6 3000K
● A Gold	● W 3000K CRI > 90
● L Oyster White	● J 3500K
○ 7 White	● 9 4000K



IP40 500 700 900 230 g Ø46 2

Ø46
115 - 3W/6W
127 - 9W
Ø52

Tono Super Am

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 200 lm	500mA - 350 lm	700mA - 450 lm
3° Lens	7T3849._ _		
10° Lens		733850._ _	733851._ _
30° Lens		763850._ _	763851._ _

FINISH	CCT
● H Black	● U 2200K
● C Gothic Cement	● Y 2700K
● K Corten	● 6 3000K
● A Gold	● W 3000K CRI > 90
● L Oyster White	● J 3500K
○ 7 White	● 9 4000K

SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI	p. 284
700mA	CC10-F-700-SI	p. 286
900mA	CC23-F-900-SP	p. 287

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



IP40	500 700 900		150 g	Ø50	2

Tono AF fixing frame

FIXING FRAME A00861.30



Tono AF IP40 module

FIXING FRAME



MODULE

	500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K		900mA - 230 lm	500mA - 520 lm	700mA - 670 lm
3° Lens	7T3933._ _			
10° Lens		733934._ _	733935._ _	
30° Lens		763934._ _	763935._ _	
50° Lens		7D3934._ _	7D3935._ _	

FINISH

- H Black
- C Gothic Cement
- K Corten
- A Gold
- L Oyster White
- 7 White

CCT


- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K



IP55	500 700 900		150 g	Ø50	2

Tono AF fixing frame

FIXING FRAME A00861.30



Tono AF IP55 module

FIXING FRAME



MODULE

	500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K		900mA - 180 lm	500mA - 500 lm	700mA - 660 lm
3° Lens	7T4280._ _			
10° Lens		734281._ _	734282._ _	
30° Lens		764281._ _	764282._ _	
50° Lens		7D4281._ _	7D4282._ _	

FINISH

- H Black
- C Gothic Cement
- K Corten
- A Gold
- L Oyster White
- 7 White

CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K

SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI	p. 284
700mA	CC10-F-700-SI	p. 286
900mA	CC23-F-900-SP	p. 287

ACCESSORIES




Hole saw
A00832.H0



Installation video

EXAMPLE CODE COMPOSITION






IP40
 500
 700
 900
 180 g
 Ø50
 2

Tono Super AF fixing frame

FIXING FRAME A00655.30



Tono Super AF module



500 / 700 / 900mA
 3W
 6W
 9W
 Lumen Output: 3000K 900mA - 200 lm 500mA - 350 lm 700mA - 450 lm

3° Lens	7T3936._ _		
10° Lens		733937._ _	733938._ _
30° Lens		763937._ _	763938._ _

FINISH	CCT
H Black	U 2200K
C Gothic Cement	Y 2700K
K Corten	6 3000K
A Gold	W 3000K CRI > 90
L Oyster White	J 3500K
7 White	9 4000K

SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI	p. 284
700mA	CC10-F-700-SI	p. 286
900mA	CC23-F-900-SP	p. 287

ACCESSORIES




Hole saw
A00832.H0



Installation video

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Tono mR

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 250 lm	500mA - 520 lm	700mA - 700 lm
3° Lens	7T3692._ _		
10° Lens		733691._ _	734025._ _
30° Lens		763691._ _	764025._ _
50° Lens		7D3691._ _	7D4025._ _

FINISH


- 4 Black
- 3 Gray
- 7 White
- W All White

CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K

Tono mR with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 170 lm	500mA - 510 lm	700mA - 530 lm
3° Lens	7T4283._ _		
10° Lens		734284._ _	734026._ _
30° Lens		764284._ _	764026._ _
50° Lens		7D4284._ _	7D4026._ _



Tono mR IP55

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 250 lm	500mA - 500 lm	700mA - 650 lm
3° Lens	7T4339._ _		
10° Lens		734340._ _	734341._ _
30° Lens		764340._ _	764341._ _
50° Lens		7D4340._ _	7D4341._ _

FINISH

- 4 Black
- 3 Gray
- 7 White
- W All White

CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K

Tono mR IP55 with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 170 lm	500mA - 400 lm	700mA - 500 lm
3° Lens	7T4342._ _		
10° Lens		734343._ _	734344._ _
30° Lens		764343._ _	764344._ _
50° Lens		7D4343._ _	7D4344._ _

SUGGESTED DRIVERS (not included)

500mA	CC20-F-500-N	p. 284
700mA	CC20-F-700-N	p. 286
900mA	CC23-F-900-SP	p. 287

EXAMPLE CODE COMPOSITION






- IP40
- 500
700
900
- 320 g
- Ø86
- 2

Tono RF fixing frame

FIXING FRAME A00656.30



Tono RF module

FIXING FRAME



MODULE



500 / 700 / 900mA	3W	6W	9W
Lumen Output: 3000K	900mA - 250 lm	500mA - 520 lm	700mA - 700 lm
3° Lens	7T3939._ _		
10° Lens		733940._ _	733941._ _
30° Lens		763940._ _	763941._ _
50° Lens		7D3940._ _	7D3941._ _

FINISH

- H Black
- C Gothic Cement
- K Corten
- A Gold
- L Oyster White
- 7 White

CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K

Tono RF module with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output: 3000K	900mA - 170 lm	500mA - 510 lm	700mA - 530 lm
3° Lens	7T3942._ _		
10° Lens		733943._ _	733944._ _
30° Lens		763943._ _	763944._ _
50° Lens		7D3943._ _	7D3944._ _

SUGGESTED DRIVERS (not included)

500mA	CC20-F-500-N	p. 284
700mA	CC20-F-700-N	p. 286
900mA	CC20-F-900-N	p. 287

ACCESSORIES



Hole saw
A00833.H0



Installation video


EXAMPLE CODE COMPOSITION





Tono In&Out m

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 250 lm	500mA - 520 lm	700mA - 700 lm
3° Lens	7T3861._ _		
10° Lens		733862._ _	733863._ _
30° Lens		763862._ _	763863._ _
50° Lens		7D3862._ _	7D3863._ _



FINISH	CCT
● H Black	● U 2200K
● B Dark Bronze	● Y 2700K
○ 7 White	● 6 3000K
	● W 3000K CRI > 90
	● J 3500K
	● 9 4000K

Tono In&Out m with hex louver


500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 170 lm	500mA - 410 lm	700mA - 530 lm
3° Lens	7T3864._ _		
10° Lens		733865._ _	733866._ _
30° Lens		763865._ _	763866._ _
50° Lens		7D3865._ _	7D3866._ _



Tono In&Out F fixing frame

FIXING FRAME	A00654._ 0
--------------	------------

FRAME FINISH
● 4 Black
● 3 Gray



Tono In&Out F module

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 250 lm	500mA - 520 lm	700mA - 700 lm
3° Lens	7T3927._ _		
10° Lens		733928._ _	733929._ _
30° Lens		763928._ _	763929._ _
50° Lens		7D3928._ _	7D3929._ _

FINISH	CCT
● H Black	● U 2200K
● B Dark Bronze	● Y 2700K
○ 7 White	● 6 3000K
	● W 3000K CRI > 90
	● J 3500K
	● 9 4000K

FIXING FRAME



+

MODULE



Tono In&Out F module with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 170 lm	500mA - 410 lm	700mA - 530 lm
3° Lens	7T3930._ _		
10° Lens		733931._ _	733932._ _
30° Lens		763931._ _	763932._ _
50° Lens		7D3931._ _	7D3932._ _

SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI	p. 284
700mA	CC10-F-700-SI	p. 286
900mA	CC23-F-900-SP	p. 287

ACCESSORIES



Hole saw
A00830.H0



Installation video

EXAMPLE CODE COMPOSITION






Ariel Am fixing frame

FIXING FRAME A01232...0

FRAME FINISH

_ See module finish



Ariel Am module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4408. _ _ _ _	7Q4409. _ _ _ _
18° Lens	784408. _ _ _ _	784409. _ _ _ _
24° Lens	7G4408. _ _ _ _	7G4409. _ _ _ _
33° Lens	7E4408. _ _ _ _	7E4409. _ _ _ _
52° Lens	754408. _ _ _ _	754409. _ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90


DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

● Plug&Play System

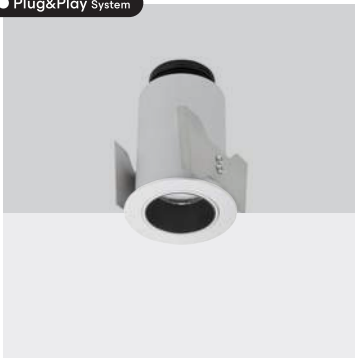


Ariel Am Plug&Play fixing frame

FIXING FRAME A01590...0

FRAME FINISH

_ See module finish



Ariel Am Plug&Play module

FIXING FRAME



MODULE



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens	7Q4619. _ _ _ _	7Q4620. _ _ _ _
18° Lens	784619. _ _ _ _	784620. _ _ _ _
24° Lens	7G4619. _ _ _ _	7G4620. _ _ _ _
33° Lens	7E4619. _ _ _ _	7E4620. _ _ _ _
52° Lens	754619. _ _ _ _	754620. _ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)

- 500mA CC10-F-500-SI p. 284
- 700mA CC23-F-700-SP p. 286


INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION

123456.






Ariel Am Wall Washer fixing frame

FIXING FRAME A01232._0

FRAME FINISH

_ See module finish



Ariel Am Wall Washer module

500 / 700mA	9W	13W
Lumen Output: 3000K	500mA - 900 lm	700mA - 1100 lm
Wall Washer	7W4899._ _	7W4900._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White
- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

FIXING FRAME



+

MODULE




Ariel Am IP55 Wall Washer fixing frame

FIXING FRAME A01341._0

FRAME FINISH

_ See module finish



Ariel Am IP55 Wall Washer module

500 / 700mA	9W	13W
Lumen Output: 3000K	500mA - 880 lm	700mA - 1080 lm
Wall Washer	7W4901._ _	7W4902._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White
- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

FIXING FRAME



+




SUGGESTED DRIVERS (not included)

500mA CC10-F-500-SI p. 284
700mA CC23-F-700-SP p. 286

EXAMPLE CODE COMPOSITION

123456 CCT FINISH

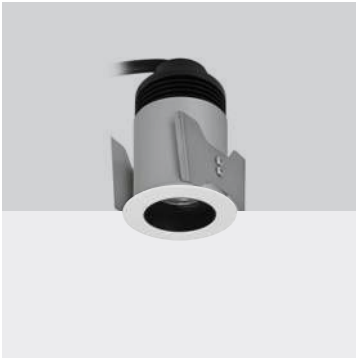


IP55 500/700 250 g Ø54 2 2,5

Ariel Am IP55 fixing frame

FIXING FRAME A01341...0

FRAME FINISH

_ See module finish



Ariel Am IP55 module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output: 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
14° Lens [1]	7Q4577.	7Q4578.
18° Lens	784577.	784578.
24° Lens	7G4577.	7G4578.
33° Lens	7E4577.	7E4578.
52° Lens	754577.	754578.

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)


500mA CC10-F-500-SI p. 284
700mA CC23-F-700-SP p. 286


INTERCHANGEABLE ACCESSORIES



p. 260


EXAMPLE CODE COMPOSITION





Ariel AF fixing frame

FIXING FRAME A00861.30



Ariel AF module


[1] 14° Lens not interchangeable



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4408. _ _ _ _	7Q4409. _ _ _ _
18° Lens	784408. _ _ _ _	784409. _ _ _ _
24° Lens	7G4408. _ _ _ _	7G4409. _ _ _ _
33° Lens	7E4408. _ _ _ _	7E4409. _ _ _ _
52° Lens	754408. _ _ _ _	754409. _ _ _ _


MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

● Plug&Play System

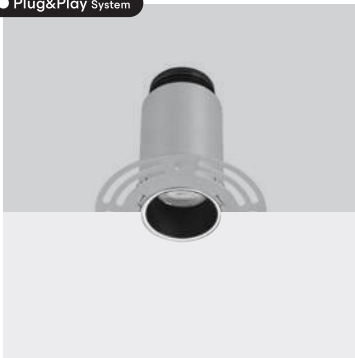

Ariel AF Plug&Play fixing frame

FIXING FRAME A01589.30



Ariel AF Plug&Play module



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens	7Q4619. _ _ _ _	7Q4620. _ _ _ _
18° Lens	784619. _ _ _ _	784620. _ _ _ _
24° Lens	7G4619. _ _ _ _	7G4620. _ _ _ _
33° Lens	7E4619. _ _ _ _	7E4620. _ _ _ _
52° Lens	754619. _ _ _ _	754620. _ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)


500mA CC10-F-500-SI p. 284
700mA CC23-F-700-SP p. 286

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






IP40 500 / 700 220 g Ø50 2

Ariel AF Wall Washer fixing frame

FIXING FRAME A00861.30



Ariel AF Wall Washer module



500 / 700mA	9W	13W
Lumen Output: 3000K	500mA - 900 lm	700mA - 1100 lm
Wall Washer	7W4899._ _	7W4900._ _


MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90



IP55 500 / 700 220 g Ø50 2

Ariel AF IP55 Wall Washer fixing frame

FIXING FRAME A01342.30



Ariel AF IP55 Wall Washer module



500 / 700mA	9W	13W
Lumen Output: 3000K	500mA - 880 lm	700mA - 1080 lm
Wall Washer	7W4901._ _	7W4902._ _

MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90

SUGGESTED DRIVERS (not included)

500mA CC10-F-500-SI p. 284
700mA CC23-F-700-SP p. 286

ACCESSORIES



Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



- IP55
- WIPS
- 500
700
- 220 g
- Ø50
- 2
- TM
66
- 2,5

Ariel AF IP55 fixing frame

FIXING FRAME A01342.30



Ariel AF IP55 module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output: 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
14° Lens [1]	7Q4577.____	7Q4578.____
18° Lens	784577.____	784578.____
24° Lens	7G4577.____	7G4578.____
33° Lens	7E4577.____	7E4578.____
52° Lens	754577.____	754578.____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)

- 500mA CC10-F-500-SI p. 284
- 700mA CC23-F-700-SP p. 286


INTERCHANGEABLE ACCESSORIES



p. 260

Hole saw
A00832.H0

EXAMPLE CODE COMPOSITION






IP40
 500 / 700
 480 g
 Ø86
 2
 SD CM
 TM 66
 2,5

Ariel mR fixing frame

FIXING FRAME A01270._0

FRAME FINISH

_ See module finish



Ariel mR module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE

500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4425._ _ _ _	7Q4426._ _ _ _
18° Lens	784425._ _ _ _	784426._ _ _ _
24° Lens	7G4425._ _ _ _	7G4426._ _ _ _
33° Lens	7E4425._ _ _ _	7E4426._ _ _ _
52° Lens	754425._ _ _ _	754426._ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

● Plug&Play System




IP40
 500 / 700
 480 g
 Ø86
 P&P
 2
 SD CM
 TM 66
 2,6

Ariel mR Plug&Play fixing frame

FIXING FRAME A01592._0

FRAME FINISH

_ See module finish



Ariel mR Plug&Play module

FIXING FRAME



MODULE

500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens	7Q4621._ _ _ _	7Q4622._ _ _ _
18° Lens	784621._ _ _ _	784622._ _ _ _
24° Lens	7G4621._ _ _ _	7G4622._ _ _ _
33° Lens	7E4621._ _ _ _	7E4622._ _ _ _
52° Lens	754621._ _ _ _	754622._ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)

- 500mA CC10-F-500-SI p. 284
- 700mA CC20-F-700-N p. 286


INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION

123456






Ariel mR Wall Washer fixing frame

FIXING FRAME A01270._0

FRAME FINISH

_ See module finish



Ariel mR Wall Washer module

500 / 700mA	9W	13W
Lumen Output 3000K	500mA - 900 lm	700mA - 1100 lm
Wall Washer	7W4895._ _	7W4896._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White
- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

FIXING FRAME



MODULE




Ariel mR IP55 Wall Washer fixing frame

FIXING FRAME A01270._0

FRAME FINISH

_ See module finish



Ariel mR IP55 Wall Washer module

500 / 700mA	9W	13W
Lumen Output 3000K	500mA - 880 lm	700mA - 1080 lm
Wall Washer	7W4897._ _	7W4898._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White
- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

500mA CC10-F-500-SI p. 284
700mA CC20-F-700-N p. 286

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




IP55
 500 / 700
 480 g
 Ø86
 2
 TM 66

Ariel mR IP55 fixing frame

FIXING FRAME A01270...0

FRAME FINISH

_ See module finish



Ariel mR IP55 module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE



500 / 700mA Lumen Output: 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
14° Lens [1]	7Q4526. _ _ _ _	7Q4527. _ _ _ _
18° Lens	784526. _ _ _ _	784527. _ _ _ _
24° Lens	7G4526. _ _ _ _	7G4527. _ _ _ _
33° Lens	7E4526. _ _ _ _	7E4527. _ _ _ _
52° Lens	754526. _ _ _ _	754527. _ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)


500mA CC10-F-500-SI p. 284
700mA CC20-F-700-N p. 286

INTERCHANGEABLE ACCESSORIES



p. 260


EXAMPLE CODE COMPOSITION





Ariel RF fixing frame

FIXING FRAME A00656.30



Ariel RF module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4425.____	7Q4426.____
18° Lens	784425.____	784426.____
24° Lens	7G4425.____	7G4426.____
33° Lens	7E4425.____	7E4426.____
52° Lens	754425.____	754426.____


MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

● Plug&Play System



Ariel RF Plug&Play fixing frame

FIXING FRAME A01591.30



Ariel RF Plug&Play module

FIXING FRAME



MODULE



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens	7Q4621.____	7Q4622.____
18° Lens	784621.____	784622.____
24° Lens	7G4621.____	7G4622.____
33° Lens	7E4621.____	7E4622.____
52° Lens	754621.____	754622.____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		


SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI	p. 284
700mA	CC20-F-700-N	p. 286

INTERCHANGEABLE ACCESSORIES




EXAMPLE CODE COMPOSITION





Ariel RF Wall Washer fixing frame

FIXING FRAME **A00656.30**



Ariel RF Wall Washer module




500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
Wall Washer	7W4895._ _	7W4896._ _

MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90



Ariel RF IP55 Wall Washer fixing frame

FIXING FRAME **A00656.30**



Ariel RF IP55 Wall Washer module



500 / 700mA Lumen Output 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
Wall Washer	7W4897._ _	7W4898._ _

MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90

SUGGESTED DRIVERS (not included)

500mA **CC10-F-500-SI** p. 284
 700mA **CC20-F-700-N** p. 286

ACCESSORIES



Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



- IP55
- 500
700
- 450 g
- Ø86
- 2
- 2,5

Ariel RF IP55 fixing frame

FIXING FRAME A00656.30



Ariel RF IP55 module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output: 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
14° Lens [1]	7Q4526. _ _ _ _	7Q4527. _ _ _ _
18° Lens	784526. _ _ _ _	784527. _ _ _ _
24° Lens	7G4526. _ _ _ _	7G4527. _ _ _ _
33° Lens	7E4526. _ _ _ _	7E4527. _ _ _ _
52° Lens	754526. _ _ _ _	754527. _ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)

- 500mA CC10-F-500-SI p. 284
- 700mA CC20-F-700-N p. 286


INTERCHANGEABLE ACCESSORIES



p. 260

Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION






Ariel In&Out m fixing frame

FIXING FRAME A01293._0


FRAME FINISH

_ See module finish



Ariel In&Out m module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4421.____	7Q4422.____
18° Lens	784421.____	784422.____
24° Lens	764421.____	764422.____
33° Lens	7E4421.____	7E4422.____
52° Lens	754421.____	754422.____

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90


DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

● Plug&Play System

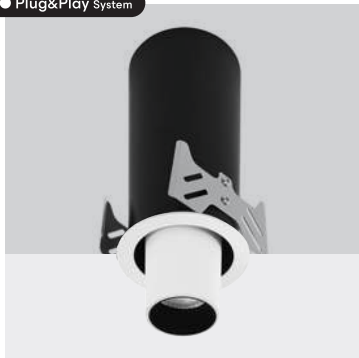


Ariel In&Out m Plug&Play fixing frame


FIXING FRAME A01594._0

FRAME FINISH

_ See module finish



Ariel In&Out m Plug&Play module



500 / 600mA Lumen Output 3000K	9W 500mA - 900 lm	11W 600mA - 1000 lm
14° Lens	7Q4625.____	7Q4626.____
18° Lens	784625.____	784626.____
24° Lens	764625.____	764626.____
33° Lens	7E4625.____	7E4626.____
52° Lens	754625.____	754626.____

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)


500mA	CC10-F-500-SI	p. 284
600mA	CC20-F-600-NI	p. 285
700mA	CC20-F-700-NI	p. 286

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






Ariel In&Out m Wall Washer fixing frame

FIXING FRAME A01293._0

FRAME FINISH

_ See module finish



Ariel In&Out m Wall Washer module

500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
Wall Washer	7W4903._ _	7W4904._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White
- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

FIXING FRAME



MODULE




Ariel In&Out m IP55 Wall Washer fixing frame

FIXING FRAME A01293._0

FRAME FINISH

_ See module finish



Ariel In&Out m IP55 Wall Washer module

500 / 700mA Lumen Output 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
Wall Washer	7W4905._ _	7W4906._ _

MODULE FINISH

CCT

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White
- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

FIXING FRAME




MODULE

SUGGESTED DRIVERS (not included)

500mA CC10-F-500-SI p. 284
700mA CC20-F-700-NI p. 286

EXAMPLE CODE COMPOSITION


123456 CCT FINISH

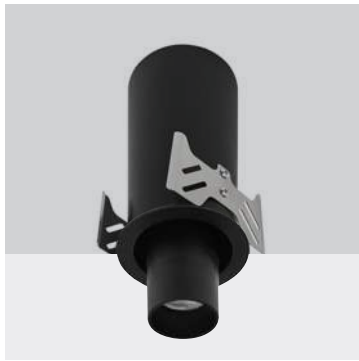

IP55 500/700 540 g 067 2 2,5

Ariel In&Out m IP55 fixing frame

FIXING FRAME A01293._0 FRAME FINISH _ See module finish



Ariel In&Out m IP55 module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
14° Lens [1]	7Q4617.____	7Q4618.____
18° Lens	784617.____	784618.____
24° Lens	7G4617.____	7G4618.____
33° Lens	7E4617.____	7E4618.____
52° Lens	754617.____	754618.____


MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		



IP40 500/700 290 g 079 2 2,5

Ariel Tilt 35 m fixing frame

FIXING FRAME A01678._0 FRAME FINISH _ See module finish



Ariel Tilt 35 m module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4915.____	7Q4916.____
18° Lens	784915.____	784916.____
24° Lens	7G4915.____	7G4916.____
33° Lens	7E4915.____	7E4916.____
52° Lens	754915.____	754916.____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)


500mA CC10-F-500-SI p. 284
700mA CC20-F-700-NI p. 286

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






Ariel In&Out F fixing frame

FIXING FRAME A00654_0


FRAME FINISH

- 4 Black
- 3 Gray



Ariel In&Out F module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4421. _ _ _ _	7Q4422. _ _ _ _
18° Lens	784421. _ _ _ _	784422. _ _ _ _
24° Lens	764421. _ _ _ _	764422. _ _ _ _
33° Lens	7E4421. _ _ _ _	7E4422. _ _ _ _
52° Lens	754421. _ _ _ _	754422. _ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

● Plug&Play System




Ariel In&Out F Plug&Play fixing frame


FIXING FRAME A01593_0

FRAME FINISH

- 4 Black
- 3 Gray



Ariel In&Out F Plug&Play module



500 / 600mA Lumen Output 3000K	9W 500mA - 900 lm	11W 600mA - 1000 lm
14° Lens	7Q4625. _ _ _ _	7Q4626. _ _ _ _
18° Lens	784625. _ _ _ _	784626. _ _ _ _
24° Lens	764625. _ _ _ _	764626. _ _ _ _
33° Lens	7E4625. _ _ _ _	7E4626. _ _ _ _
52° Lens	754625. _ _ _ _	754626. _ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens


SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI	p. 284
600mA	CC20-F-600-NI	p. 285
700mA	CC20-F-700-NI	p. 286

INTERCHANGEABLE ACCESSORIES



EXAMPLE CODE COMPOSITION






IP40 500 / 700 530 g Ø64 2

Ariel In&Out F Wall Washer fixing frame

FIXING FRAME A00654._0

FRAME FINISH

- 4 Black
- 3 Gray



Ariel In&Out F Wall Washer module

500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
Wall Washer	7W4903._ _	7W4904._ _

MODULE FINISH

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |

CCT

FIXING FRAME



MODULE




IP55 500 / 700 530 g Ø64 2

Ariel In&Out F IP55 Wall Washer fixing frame

FIXING FRAME A00654._0

FRAME FINISH

- 4 Black
- 3 Gray



Ariel In&Out F IP55 Wall Washer module

500 / 700mA Lumen Output 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
Wall Washer	7W4905._ _	7W4906._ _

MODULE FINISH

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |

CCT

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

- 500mA CC10-F-500-SI p. 284
- 700mA CC20-F-700-NI p. 286

ACCESSORIES



Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




Ariel In&Out F IP55 fixing frame

FIXING FRAME A00654_0


FRAME FINISH

- 4 Black
- 3 Gray



Ariel In&Out F IP55 module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output 3000K	9W 500mA - 880 lm	13W 700mA - 1080 lm
14° Lens [1]	7Q4617.____	7Q4618.____
18° Lens	784617.____	784618.____
24° Lens	7G4617.____	7G4618.____
33° Lens	7E4617.____	7E4618.____
52° Lens	754617.____	754618.____

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome


OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens



Ariel Tilt 35 F fixing frame

FIXING FRAME A01677.30



Ariel Tilt 35 F module

[1] 14° Lens not interchangeable



500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4915.____	7Q4916.____
18° Lens	784915.____	784916.____
24° Lens	7G4915.____	7G4916.____
33° Lens	7E4915.____	7E4916.____
52° Lens	754915.____	754916.____

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)

500mA CC10-F-500-SI p. 284
700mA CC20-F-700-NI p. 286

INTERCHANGEABLE ACCESSORIES




p. 260

Hole saw Ariel In&Out F IP55
A00830.HO

Hole saw Ariel Tilt 35 F
A00833.HO

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 480 g
- Ø67
- 2
- SD CM
- TM 66
- 2,5

Saturno Am fixing frame

FIXING FRAME A01235...0

FRAME FINISH

_ See module finish



Saturno Am module

[1] 12° Lens not interchangeable

FIXING FRAME



+

MODULE



500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4410..._ _ _ _
18° Lens	784410..._ _ _ _
24° Lens	7G4410..._ _ _ _
33° Lens	7E4410..._ _ _ _
52° Lens	754410..._ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

● Plug&Play System




- IP40
- 500
- 480 g
- Ø67
- P&P
- 2
- SD CM
- TM 66
- 2,5

Saturno Am Plug&Play fixing frame

FIXING FRAME A01613...0

FRAME FINISH

_ See module finish



Saturno Am Plug&Play module

FIXING FRAME



+

MODULE



500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens	7Q4767..._ _ _ _
18° Lens	784767..._ _ _ _
24° Lens	7G4767..._ _ _ _
33° Lens	7E4767..._ _ _ _
52° Lens	754767..._ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)


500mA CC20-F-500-NI p. 284

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






Saturno Am Wall Washer fixing frame

FIXING FRAME A01235._0

FRAME FINISH

_ See module finish



Saturno Am Wall Washer module

FIXING FRAME



+

MODULE



500mA 18W
Lumen Output 3000K 500mA - 2100 lm

Wall Washer 7W4907._ _

MODULE FINISH

- | | |
|--|---|
| <ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ○ 7 White | <ul style="list-style-type: none"> ● U1 2200K CRI > 90 ● B2 2400K CRI > 90 ● X 2700K CRI > 90 ● X1 2700K CRI > 95 ● 6 3000K ● W 3000K CRI > 90 ● W1 3000K CRI > 95 ● K 3500K CRI > 90 ● K1 3500K CRI > 95 ● D 4000K CRI > 90 |
|--|---|

CCT




Saturno Am IP55 Wall Washer fixing frame

FIXING FRAME A01235._0

FRAME FINISH

_ See module finish



Saturno Am IP55 Wall Washer module

FIXING FRAME



+

MODULE




500mA 18W
Lumen Output 3000K 500mA - 2050 lm

Wall Washer 7W4908._ _

MODULE FINISH

- | | |
|--|---|
| <ul style="list-style-type: none"> ● H Black ● M8 Brown ● G3 Gray ● C Gothic Cement ● G7 Beige Gray ● A6 Gray White ● S Warm White ○ 7 White | <ul style="list-style-type: none"> ● U1 2200K CRI > 90 ● B2 2400K CRI > 90 ● X 2700K CRI > 90 ● X1 2700K CRI > 95 ● 6 3000K ● W 3000K CRI > 90 ● W1 3000K CRI > 95 ● K 3500K CRI > 90 ● K1 3500K CRI > 95 ● D 4000K CRI > 90 |
|--|---|

CCT

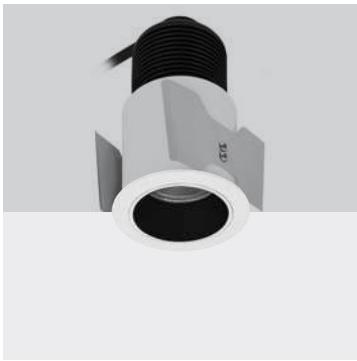


IP55 500 480 g Ø67 2 2,5

Saturno Am IP55 fixing frame

FIXING FRAME A01235._0

FRAME FINISH

_ See module finish



Saturno Am IP55 module

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE



500mA Lumen Output 3000K	18W 500mA - 2050 lm
12° Lens [1]	7Q4490._ _ _ _
18° Lens	784490._ _ _ _
24° Lens	7G4490._ _ _ _
33° Lens	7E4490._ _ _ _
52° Lens	754490._ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)

500mA CC20-F-500-NI p. 284


INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION


123456.





Saturno AF fixing frame

FIXING FRAME A01234.30



Saturno AF module


[1] 12° Lens not interchangeable



500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4410.____
18° Lens	784410.____
24° Lens	7G4410.____
33° Lens	7E4410.____
52° Lens	754410.____


MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

● Plug&Play System

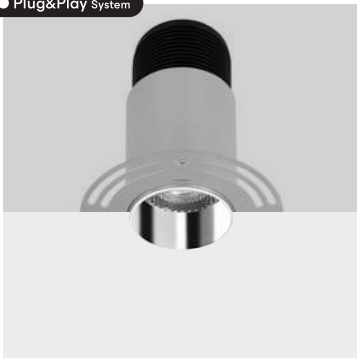


Saturno AF Plug&Play fixing frame

FIXING FRAME A01614.30



Saturno AF Plug&Play module



500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens	7Q4767.____
18° Lens	784767.____
24° Lens	7G4767.____
33° Lens	7E4767.____
52° Lens	754767.____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)


500mA CC20-F-500-NI p. 284

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






IP40 500 430 g Ø64 2

Saturno AF Wall Washer fixing frame

FIXING FRAME A01234.30



Saturno AF Wall Washer module



500mA 18W
Lumen Output 3000K 500mA - 2100 lm
Wall Washer 7W4907._ _


MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90



IP55 500 430 g Ø64 2

Saturno AF IP55 Wall Washer fixing frame

FIXING FRAME A01234.30



Saturno AF IP55 Wall Washer module



500mA 18W
Lumen Output 3000K 500mA - 2050 lm
Wall Washer 7W4908._ _

MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90

SUGGESTED DRIVERS (not included)

500mA CC20-F-500-NI p. 284

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




Hole saw A00830.H0



- IP55
- 500
- 430 g
- Ø64
- 2
- 2,5

Saturno AF IP55 fixing frame

FIXING FRAME A01234.30



Saturno AF IP55 module

[1] 12° Lens not interchangeable



500mA Lumen Output 3000K	18W 500mA - 2050 lm
12° Lens [1]	7Q4490. _ _ _ _
18° Lens	784490. _ _ _ _
24° Lens	7G4490. _ _ _ _
33° Lens	7E4490. _ _ _ _
52° Lens	754490. _ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)

500mA CC20-F-500-NI p. 284

INTERCHANGEABLE ACCESSORIES




p. 261



Hole saw
A00830.H0

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 830 g
- Ø102
- 2
- SD CM
- TM 66
- 2,5

Saturno mR fixing frame

FIXING FRAME A01269._0

FRAME FINISH

_ See module finish



Saturno mR module

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE

500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4457._ _ _ _
18° Lens	784457._ _ _ _
24° Lens	7G4457._ _ _ _
33° Lens	7E4457._ _ _ _
52° Lens	754457._ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

● Plug&Play System




- IP40
- 500
- 830 g
- Ø102
- P&P
- TM 66
- 2,6

Saturno mR Plug&Play fixing frame

FIXING FRAME A01616._0

FRAME FINISH

_ See module finish



Saturno mR Plug&Play module

FIXING FRAME



MODULE

500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens	7Q4768._ _ _ _
18° Lens	784768._ _ _ _
24° Lens	7G4768._ _ _ _
33° Lens	7E4768._ _ _ _
52° Lens	754768._ _ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)


500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






IP40 500 830 g Ø102 2

Saturno mR Wall Washer fixing frame

FIXING FRAME A01269._0

FRAME FINISH

_ See module finish



Saturno mR Wall Washer module

FIXING FRAME



+

MODULE



500mA 18W
Lumen Output 3000K 500mA - 2100 lm

Wall Washer 7W4909._ _

MODULE FINISH

CCT

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |




IP55 500 830 g Ø102 2

Saturno mR IP55 Wall Washer fixing frame

FIXING FRAME A01269._0

FRAME FINISH

_ See module finish



Saturno mR IP55 Wall Washer module

FIXING FRAME



+

MODULE



500mA 18W
Lumen Output 3000K 500mA - 2050 lm

Wall Washer 7W4910._ _

MODULE FINISH

CCT

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |




- IP55
- 500
- 830 g
- Ø102
- 2
- 2,5

Saturno mR IP55 fixing frame

FIXING FRAME A01269...0

FRAME FINISH
_ See module finish



Saturno mR IP55 module

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE

500mA Lumen Output 3000K	18W 500mA - 2050 lm
12° Lens [1]	7Q4771.____
18° Lens	784771.____
24° Lens	7G4771.____
33° Lens	7E4771.____
52° Lens	754771.____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)


500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES



p. 261


EXAMPLE CODE COMPOSITION





Saturno RF fixing frame

FIXING FRAME A01236.30



Saturno RF module

[1] 12° Lens not interchangeable

FIXING FRAME




MODULE

500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4457. _ _ _ _
18° Lens	784457. _ _ _ _
24° Lens	7G4457. _ _ _ _
33° Lens	7E4457. _ _ _ _
52° Lens	754457. _ _ _ _


MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

● Plug&Play System

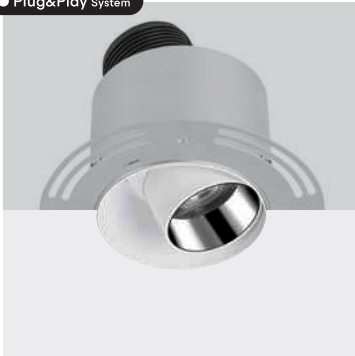

Saturno RF Plug&Play fixing frame

FIXING FRAME A01615.30



Saturno RF Plug&Play module

FIXING FRAME



MODULE

500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens	7Q4768. _ _ _ _
18° Lens	784768. _ _ _ _
24° Lens	7G4768. _ _ _ _
33° Lens	7E4768. _ _ _ _
52° Lens	754768. _ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)


500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 920 g
- Ø104
- 2

Saturno RF Wall Washer fixing frame

FIXING FRAME A01236.30



Saturno RF Wall Washer module



500mA
Lumen Output 3000K
18W
500mA - 2100 lm
Wall Washer 7W4909._ _


MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90



- IP55
- 500
- 920 g
- Ø104
- 2

Saturno RF IP55 Wall Washer fixing frame

FIXING FRAME A01236.30



Saturno RF IP55 Wall Washer module



500mA
Lumen Output 3000K
18W
500mA - 2050 lm
Wall Washer 7W4910._ _

MODULE FINISH	CCT
● H Black	● U1 2200K CRI > 90
● M8 Brown	● B2 2400K CRI > 90
● G3 Gray	● X 2700K CRI > 90
● C Gothic Cement	● X1 2700K CRI > 95
● G7 Beige Gray	● 6 3000K
● A6 Gray White	● W 3000K CRI > 90
● S Warm White	● W1 3000K CRI > 95
○ 7 White	● K 3500K CRI > 90
	● K1 3500K CRI > 95
	● D 4000K CRI > 90

SUGGESTED DRIVERS (not included)

ACCESSORIES

EXAMPLE CODE COMPOSITION

500mA CC20-F-500-N p. 284



Hole saw
A01258.H0


123456 CCT FINISH



IP55 500 920 g Ø104 2 2,5

Saturno RF IP55 fixing frame

FIXING FRAME A01236.30



Saturno RF IP55 module

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE

500mA Lumen Output 3000K	18W 500mA - 2050 lm
12° Lens [1]	7Q4771.____
18° Lens	784771.____
24° Lens	7G4771.____
33° Lens	7E4771.____
52° Lens	754771.____

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES




p. 261



Hole saw
A01258.H0

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 840 g
- Ø86
- 2
- SD CM
- TM 66
- 2,5

Saturno In&Out m fixing frame

FIXING FRAME A01294._0

FRAME FINISH

_ See module finish



Saturno In&Out m module

500mA 18W
Lumen Output 3000K 500mA - 2100 lm

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90


DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

[1] 12° Lens not interchangeable



● Plug&Play System




- IP40
- 500
- 840 g
- Ø86
- P&P
- 2
- SD CM
- TM 66
- 2,6

Saturno In&Out m Plug&Play fixing frame

FIXING FRAME A01618._0

FRAME FINISH

_ See module finish



Saturno In&Out m Plug&Play module

500mA 18W
Lumen Output 3000K 500mA - 2100 lm

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT


- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens



SUGGESTED DRIVERS (not included)


500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






Saturno In&Out m Wall Washer fixing frame

FIXING FRAME A01294._0

FRAME FINISH

_ See module finish



Saturno In&Out m Wall Washer module

500mA 18W
Lumen Output 3000K 500mA - 2100 lm
Wall Washer 7W4911._ _

MODULE FINISH

CCT

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |

FIXING FRAME



+

MODULE




Saturno In&Out m IP55 Wall Washer fixing frame

FIXING FRAME A01294._0

FRAME FINISH

_ See module finish



Saturno In&Out m IP55 Wall Washer module

500mA 18W
Lumen Output 3000K 500mA - 2050 lm
Wall Washer 7W4912._ _

MODULE FINISH

CCT

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N p. 284

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




IP55 500 840 g Ø86 2 2,5

Saturno In&Out m IP55 fixing frame

FIXING FRAME A01294._0

FRAME FINISH

_ See module finish



Saturno In&Out m IP55 module

500mA Lumen Output 3000K	18W 500mA - 2050 lm
12° Lens [1]	7Q4772._ _ _ _
18° Lens	784772._ _ _ _
24° Lens	7G4772._ _ _ _
33° Lens	7E4772._ _ _ _
52° Lens	754772._ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE




IP40 500 526 g Ø95 2 2,5

Saturno Tilt 35 m fixing frame

FIXING FRAME A01680._0

FRAME FINISH

_ See module finish



Saturno Tilt 35 m module

500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4917._ _ _ _
18° Lens	784917._ _ _ _
24° Lens	7G4917._ _ _ _
33° Lens	7E4917._ _ _ _
52° Lens	754917._ _ _ _

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
○ 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE



SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N p. 284


INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION

123456






- IP40
- 500
- 830 g
- Ø86
- 2
- SD CM
- TM 66
- 2,5

Saturno In&Out F fixing frame

FIXING FRAME A01238...0

FRAME FINISH

- 4 Black
- 3 Gray



Saturno In&Out F module

500mA 18W
Lumen Output 3000K 500mA - 2100 lm

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

[1] 12° Lens not interchangeable



● Plug&Play System




- IP40
- 500
- 830 g
- Ø86
- P&P
- 2
- SD CM
- TM 66
- 2,6

Saturno In&Out F Plug&Play fixing frame

FIXING FRAME A01617...0

FRAME FINISH

- 4 Black
- 3 Gray



Saturno In&Out F Plug&Play module

500mA 18W
Lumen Output 3000K 500mA - 2100 lm

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT


- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens




SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES



EXAMPLE CODE COMPOSITION






- IP40
- 500
- 830 g
- Ø86
- 2

Saturno In&Out F Wall Washer fixing frame

FIXING FRAME A01238._0

FRAME FINISH

- 4 Black
- 3 Gray



Saturno In&Out F Wall Washer module

500mA 18W
Lumen Output 3000K 500mA - 2100 lm
Wall Washer 7W4911._ _

MODULE FINISH

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |

FIXING FRAME



+

MODULE




- IP55
- 500
- 830 g
- Ø86
- 2

Saturno In&Out F IP55 Wall Washer fixing frame

FIXING FRAME A01238._0

FRAME FINISH

- 4 Black
- 3 Gray



Saturno In&Out F IP55 Wall Washer module

500mA 18W
Lumen Output 3000K 500mA - 2050 lm
Wall Washer 7W4912._ _

MODULE FINISH

- | | |
|-------------------|---------------------|
| ● H Black | ● U1 2200K CRI > 90 |
| ● M8 Brown | ● B2 2400K CRI > 90 |
| ● G3 Gray | ● X 2700K CRI > 90 |
| ● C Gothic Cement | ● X1 2700K CRI > 95 |
| ● G7 Beige Gray | ● 6 3000K |
| ● A6 Gray White | ● W 3000K CRI > 90 |
| ● S Warm White | ● W1 3000K CRI > 95 |
| ○ 7 White | ● K 3500K CRI > 90 |
| | ● K1 3500K CRI > 95 |
| | ● D 4000K CRI > 90 |

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N p.284

ACCESSORIES



Hole saw
A00833.H0

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




IP55 500 830 g Ø86 2 2,5

Saturno In&Out F IP55 fixing frame

FIXING FRAME A01238...0

FRAME FINISH

- 4 Black
- 3 Gray



Saturno In&Out F IP55 module

500mA 18W
Lumen Output 3000K 500mA - 2050 lm

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

Lens	Code
12° Lens [1]	7Q4772..._ _ _ _
18° Lens	784772..._ _ _ _
24° Lens	7G4772..._ _ _ _
33° Lens	7E4772..._ _ _ _
52° Lens	754772..._ _ _ _

[1] 12° Lens not interchangeable

FIXING FRAME



+


MODULE



IP40 500 530 g Ø102 2 2,5

Saturno Tilt 35 F fixing frame

FIXING FRAME A01679.30



Saturno Tilt 35 F module

500mA 18W
Lumen Output 3000K 500mA - 2100 lm

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- I Gold Chrome
- 8 Satin Gold
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

Lens	Code
12° Lens [1]	7Q4917..._ _ _ _
18° Lens	784917..._ _ _ _
24° Lens	7G4917..._ _ _ _
33° Lens	7E4917..._ _ _ _
52° Lens	754917..._ _ _ _

[1] 12° Lens not interchangeable

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES



p. 261




Hole saw Saturno In&Out F IP55
A00833.H0



Hole saw Saturno Tilt 35 F
A01258.H0

EXAMPLE CODE COMPOSITION

123456






IP40 900 720 g Ø105 2

Marte Am fixing frame

FIXING FRAME A01647._0

FRAME FINISH

_ See module finish



Marte Am module

900mA 31W
Lumen Output 3000K 900mA - 3700 lm

22° Lens 784846._ _ _

26° Lens 764846._ _ _

38° Lens 744846._ _ _

60° Lens 754846._ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

FIXING FRAME



+

MODULE



● Plug&Play System




IP40 900 720 g Ø105 P&P 2

Marte Am Plug&Play fixing frame

FIXING FRAME A01649._0

FRAME FINISH

_ See module finish



Marte Am Plug&Play module

900mA 31W
Lumen Output 3000K 900mA - 3700 lm

22° Lens 784847._ _ _

26° Lens 764847._ _ _

38° Lens 744847._ _ _

60° Lens 754847._ _ _

MODULE FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

FIXING FRAME



+

MODULE



SUGGESTED DRIVERS (not included)

900mA CC40-F-900-N p. 287


INTERCHANGEABLE ACCESSORIES



p. 262

EXAMPLE CODE COMPOSITION


123456.





Marte AF fixing frame

FIXING FRAME A01648.40



Marte AF module



900mA Lumen Output 3000K	31W 900mA - 3700 lm
22° Lens	784846. _ _ _
26° Lens	764846. _ _ _
38° Lens	744846. _ _ _
60° Lens	754846. _ _ _


MODULE FINISH	CCT	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90	
● S Warm White	● W1 3000K CRI > 95	
○ 7 White	● K 3500K CRI > 90	
	● K1 3500K CRI > 95	
	● D 4000K CRI > 90	

● Plug&Play System



Marte AF Plug&Play fixing frame

FIXING FRAME A01650.40



Marte AF Plug&Play module



900mA Lumen Output 3000K	31W 900mA - 3700 lm
22° Lens	784847. _ _ _
26° Lens	764847. _ _ _
38° Lens	744847. _ _ _
60° Lens	754847. _ _ _

MODULE FINISH	CCT	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90	
● S Warm White	● W1 3000K CRI > 95	
○ 7 White	● K 3500K CRI > 90	
	● K1 3500K CRI > 95	
	● D 4000K CRI > 90	

SUGGESTED DRIVERS (not included)

900mA CC40-F-900-N p. 287


INTERCHANGEABLE ACCESSORIES



p. 262

Hole saw
A01258.H0

EXAMPLE CODE COMPOSITION



Surface & Pendant Lighting

ILLUMINAZIONE CREATIVA

Le applique e le sospensioni indoor di DGA sono apparecchi che illuminano e, al contempo, arricchiscono l'ambiente. Caratterizzati da dimensioni contenute o da un design essenziale, possono essere discreti o presentare dettagli raffinati in vetro. Questi prodotti si prestano a molteplici utilizzi e, grazie al loro fascino e talvolta alla loro imprevedibilità, offrono una duplice funzionalità: valorizzano lo spazio e creano suggestive scenografie luminose.


CREATIVE LIGHTING

The indoor applique and suspension by DGA are luminaires that enlight while simultaneously enriching the environment. Characterized by compact dimensions or an essential design, they can be discreet or feature refined glass details. These products are suitable for multiple uses and, thanks to their charm and sometimes unpredictability, offer a dual functionality: they enhance the space and create evocative lighting scenes.





IP40
 350
 500
 700
 1 m
 (RGBW)
 115 g
 2



Gemma 40 N

350 / 500 / 700mA	1W	2W	3W	3W RGBW
Lumen Output 3000K	350mA - 90 lm	500mA - 130 lm	350mA - 250 lm	700mA - 50 lm
10° Lens	734259._ _	734260._ _		
30° Lens	764259._ _	764260._ _		764927._ 7
60° Lens	754259._ _	754260._ _	754353._ _	
Frosted Glass	714259._ _	714260._ _	714353._ _	714927._ 7
Transparent Glass	724259._ _	724260._ _	724353._ _	

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 1 Shiny Chrome	● 6 3000K
○ 7 White	● W 3000K CRI > 90
○ W All White	● 9 4000K
	● 7 RGBW


RGBW available on some products only

SUGGESTED DRIVERS (not included)

RGBW	CC50-X-700-NL	p. 286
350mA	CC20-F-350-N	p. 282
500mA	CC20-F-500-N	p. 284


EXAMPLE CODE COMPOSITION





Tono N


500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 180 lm	500mA - 540 lm	700mA - 700 lm
3° Lens	7T3886._ _		
10° Lens		733887._ _	733888._ _
30° Lens		763887._ _	763888._ _
50° Lens		7D3887._ _	7D3888._ _



FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● 3 Gray	● 6 3000K
○ 7 White	● W 3000K CRI > 90
○ W All White	● J 3500K
	● 9 4000K


Tono N with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 130 lm	500mA - 400 lm	700mA - 530 lm
3° Lens	7T3921._ _		
10° Lens		733922._ _	733923._ _
30° Lens		763922._ _	763923._ _
50° Lens		7D3922._ _	7D3923._ _



Tono N IP55

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 180 lm	500mA - 540 lm	700mA - 700 lm
3° Lens	7T3889._ _		
10° Lens		733890._ _	733891._ _
30° Lens		763890._ _	763891._ _
50° Lens		7D3890._ _	7D3891._ _



FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● 3 Gray	● 6 3000K
○ 7 White	● W 3000K CRI > 90
○ W All White	● J 3500K
	● 9 4000K

Tono N IP55 with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 130 lm	500mA - 400 lm	700mA - 530 lm
3° Lens	7T3924._ _		
10° Lens		733925._ _	733926._ _
30° Lens		763925._ _	763926._ _
50° Lens		7D3925._ _	7D3926._ _

SUGGESTED DRIVERS (not included)


500mA	CC20-F-500-N	p. 284
700mA	CC20-F-700-N	p. 286
900mA	CC20-F-900-N	p. 287

EXAMPLE CODE COMPOSITION

123456.	CCT	FINISH
---------	-----	--------



IP40
 24V
 225 g
 2



Pois 70


24V
 Lumen Output: 3000K
 Opal Glass

4W
 24Vdc - 200 lm
 7P3993._ _

FINISH	CCT
● H Black	● Y 2700K
● B6 Intense Bronze	● 6 3000K
● A Gold	● W 3000K CRI > 90
● 4Q Agate Gray	● 9 4000K
● L Oyster White	
○ 7 White	



IP40
 24V
 510 g
 2



Pois 100


24V
 Lumen Output: 3000K
 Opal Glass

6W
 24Vdc - 300 lm
 7P3994._ _

FINISH	CCT
● H Black	● Y 2700K
● B6 Intense Bronze	● 6 3000K
● A Gold	● W 3000K CRI > 90
● 4Q Agate Gray	● 9 4000K
● L Oyster White	
○ 7 White	



IP40
 24V
 1190 g
 2




Pois 150

24V
 Lumen Output: 3000K
 Opal Glass

14W
 24Vdc - 700 lm
 7P3995._ _

FINISH	CCT
● H Black	● Y 2700K
● B6 Intense Bronze	● 6 3000K
● A Gold	● W 3000K CRI > 90
● 4Q Agate Gray	● 9 4000K
● L Oyster White	
○ 7 White	


Pois Series design by Valerio Sommella & Anonima Luci



Pois 70 m

24V 4W
Lumen Output: 3000K 24Vdc - 200 lm
Opal Glass 7P4255. _ _


- | FINISH | CCT |
|---------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● B6 Intense Bronze | ● 6 3000K |
| ● A Gold | ● W 3000K CRI > 90 |
| ● 4Q Agate Gray | ● 9 4000K |
| ● L Oyster White | |
| ○ 7 White | |



Pois 100 m

24V 6W
Lumen Output: 3000K 24Vdc - 300 lm
Opal Glass 7P4256. _ _

- | FINISH | CCT |
|---------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● B6 Intense Bronze | ● 6 3000K |
| ● A Gold | ● W 3000K CRI > 90 |
| ● 4Q Agate Gray | ● 9 4000K |
| ● L Oyster White | |
| ○ 7 White | |



Pois 150 m

24V 14W
Lumen Output: 3000K 24Vdc - 700 lm
Opal Glass 7P4257. _ _

- | FINISH | CCT |
|---------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● B6 Intense Bronze | ● 6 3000K |
| ● A Gold | ● W 3000K CRI > 90 |
| ● 4Q Agate Gray | ● 9 4000K |
| ● L Oyster White | |
| ○ 7 White | |

SUGGESTED DRIVERS (not included)

24Vdc CV20-F-24-N p. 291

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



- IP40
- 230V
- 400 g
- 2

Luna 230V

220-240Vac 7W
 Lumen Output: 3000K CRI > 90 220-240Vac - 340 lm
 Diffused Emission 7P4813. _ _ _



- | FINISH | CCT | CEILING CANOPY |
|-------------------------|--------------------|----------------|
| ● X2 PVD Satin Black | ● U 2200K | ● H Black |
| ● Y2 PVD Polished Black | ● Y 2700K | ○ 7 White |
| ● T Titanium | ● 6 3000K | |
| ● B Dark Bronze | ● W 3000K CRI > 90 | |
| ● Y1 PVD Gold Chrome | ● 9 4000K | |
| ● X4 PVD Satin Gold | | |
| ● Z Champagne Gold | | |
| ● X3 PVD Rose Gold | | |
| ● Y3 PVD Shiny Chrome | | |



- IP40
- 24V
- 320 g
- Ø57
- 2


Luna m fixing frame

FIXING FRAME A01756. _ 0


FRAME FINISH
 _ See ceiling canopy finish

Luna m

24V 6W
 Lumen Output: 3000K CRI > 90 24Vdc - 340 lm
 Diffused Emission 7P4811. _ _ _



- | FINISH | CCT | CEILING CANOPY |
|-------------------------|--------------------|----------------|
| ● X2 PVD Satin Black | ● U 2200K | ● H Black |
| ● Y2 PVD Polished Black | ● Y 2700K | ○ 7 White |
| ● T Titanium | ● 6 3000K | |
| ● B Dark Bronze | ● W 3000K CRI > 90 | |
| ● Y1 PVD Gold Chrome | ● 9 4000K | |
| ● X4 PVD Satin Gold | | |
| ● Z Champagne Gold | | |
| ● X3 PVD Rose Gold | | |
| ● Y3 PVD Shiny Chrome | | |

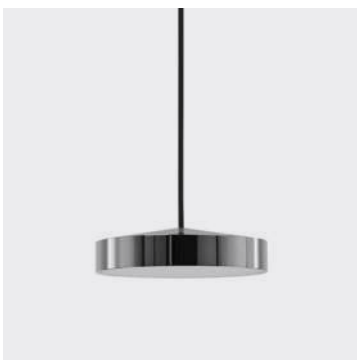


- IP40
- 24V
- 470 g
- Ø60
- 2

Luna F fixing frame

FIXING FRAME A01636.30

Luna F suspension

24V 6W
 Lumen Output: 3000K CRI > 90 24Vdc - 340 lm
 Diffused Emission 7P4811. _ _ _



- | FINISH | CCT | CEILING CANOPY |
|-------------------------|--------------------|----------------|
| ● X2 PVD Satin Black | ● U 2200K | ● H Black |
| ● Y2 PVD Polished Black | ● Y 2700K | ○ 7 White |
| ● T Titanium | ● 6 3000K | |
| ● B Dark Bronze | ● W 3000K CRI > 90 | |
| ● Y1 PVD Gold Chrome | ● 9 4000K | |
| ● X4 PVD Satin Gold | | |
| ● Z Champagne Gold | | |
| ● X3 PVD Rose Gold | | |
| ● Y3 PVD Shiny Chrome | | |

SUGGESTED DRIVERS (not included)

ACCESSORIES

EXAMPLE CODE COMPOSITION

24Vdc CV20-F-24-N p. 291



Hole saw
 A00830.H0


123456
 CEILING CANOPY
 CCT
 FINISH

Luna Series design by Draw Studio



Luna B Micro

24Vdc	6W
Lumen Output: 3000K CRI > 90	24Vdc - 340 lm
Diffused Emission	7P4851. _ _ _ _ - _ _ _



FINISH	CCT	ADAPTER	DIMMING	CABLE LENGTH (cm)
● X2 PVD Satin Black	● U 2200K	● H Black	F ON-OFF	010 ÷ 250
● Y2 PVD Polished Black	● Y 2700K	○ 7 White	D DALI	
● T Titanium	● 6 3000K		M Broadcast	
● B Dark Bronze	● W 3000K CRI > 90			
● Y1 PVD Gold Chrome	● 9 4000K			
● X4 PVD Satin Gold				
● Z Champagne Gold				
● X3 PVD Rose Gold				
● Y3 PVD Shiny Chrome				



SUGGESTED DRIVERS (not included)

24Vdc CV20-F-24-N p. 291

TRACKS ACCESSORIES


Micro track and accessories p. 268

EXAMPLE CODE COMPOSITION

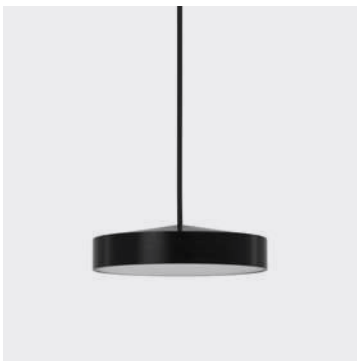

Luna B Multi

24Vdc	6W
Lumen Output: 3000K CRI > 90	24Vdc - 340 lm
Diffused Emission	7P4814. _ _ _ _ - _ _ _



FINISH	CCT	ADAPTER	DIMMING	CABLE LENGTH (cm)
● X2 PVD Satin Black	● U 2200K	● H Black	F ON-OFF	010 ÷ 250
● Y2 PVD Polished Black	● Y 2700K	○ 7 White	D DALI	
● T Titanium	● 6 3000K		M Broadcast	
● B Dark Bronze	● W 3000K CRI > 90			
● Y1 PVD Gold Chrome	● 9 4000K			
● X4 PVD Satin Gold				
● Z Champagne Gold				
● X3 PVD Rose Gold				
● Y3 PVD Shiny Chrome				


SUGGESTED DRIVERS (not included)

24Vdc CV20-F-24-N p. 291

TRACKS ACCESSORIES

Multi track and accessories p. 272


EXAMPLE CODE COMPOSITION





Lunare 230V

220-240Vac 7W
 Lumen Output: 3000K CRI > 90 220-240Vac - 340 lm
 Diffused Emission 7P4920. _ _ _



FINISH	CCT	CEILING CANOPY
● X2 PVD Satin Black	● U 2200K	● H Black
● Y2 PVD Polished Black	● Y 2700K	○ 7 White
● T Titanium	● 6 3000K	
● B Dark Bronze	● W 3000K CRI > 90	
● Y1 PVD Gold Chrome	● 9 4000K	
● X4 PVD Satin Gold		
● Z Champagne Gold		
● X3 PVD Rose Gold		
● Y3 PVD Shiny Chrome		




Lunare m fixing frame

FIXING FRAME A01756. _ 0

FRAME FINISH
 _ See ceiling canopy finish

Lunare m

24V 6W
 Lumen Output: 3000K CRI > 90 24Vdc - 340 lm
 Diffused Emission 7P4918. _ _ _



FINISH	CCT	CEILING CANOPY
● X2 PVD Satin Black	● U 2200K	● H Black
● Y2 PVD Polished Black	● Y 2700K	○ 7 White
● T Titanium	● 6 3000K	
● B Dark Bronze	● W 3000K CRI > 90	
● Y1 PVD Gold Chrome	● 9 4000K	
● X4 PVD Satin Gold		
● Z Champagne Gold		
● X3 PVD Rose Gold		
● Y3 PVD Shiny Chrome		




Lunare F fixing frame

FIXING FRAME A01636.30

Lunare F suspension

24V 6W
 Lumen Output: 3000K CRI > 90 24Vdc - 340 lm
 Diffused Emission 7P4918. _ _ _



FINISH	CCT	CEILING CANOPY
● X2 PVD Satin Black	● U 2200K	● H Black
● Y2 PVD Polished Black	● Y 2700K	○ 7 White
● T Titanium	● 6 3000K	
● B Dark Bronze	● W 3000K CRI > 90	
● Y1 PVD Gold Chrome	● 9 4000K	
● X4 PVD Satin Gold		
● Z Champagne Gold		
● X3 PVD Rose Gold		
● Y3 PVD Shiny Chrome		

SUGGESTED DRIVERS (not included)


ACCESSORIES


EXAMPLE CODE COMPOSITION

24Vdc CV20-F-24-N p. 291




Hole saw
 A00830.H0





Cometa S8

24V	12W/m	25W/m
Lumen Output 3000K CRI > 90	24Vdc - 680 lm/m	24Vdc - 1200 lm/m
Opal Cover	Q2FP1-_____	N2FP1-_____




OPTIMIZED LENGTH (cm)	FINISH	CCT
097 100 103 106	● 4 Black	● U 2200K
109 112 115 118		● Q 2500K
121 127 133 139		● X 2700K CRI > 90
145 151 157 163		● W 3000K CRI > 90
169 175 181 187		● K 3500K CRI > 90
193 199 202 205		● D 4000K CRI > 90
208 211 214 217		
220 223 226 229		
232 235 238 241		
244 247 250 253		
256 259 262 265		
268 271 274 277		
280 283 286 289		
292 295 298		

Custom lengths upon request



Cometa S8 230V

220-240Vac	12W/m	25W/m
Lumen Output 3000K CRI > 90	220-240Vac - 680 lm	220-240Vac - 1200 lm/m
Opal Cover	QSFP1-_____	NSFP1-_____



OPTIMIZED LENGTH (cm)	FINISH	CCT
097 100 103 106	● 4 Black	● U 2200K
109 112 115 118		● Q 2500K
121 127 133 139		● X 2700K CRI > 90
145 151 157 163		● W 3000K CRI > 90
169 175 181 187		● K 3500K CRI > 90
193 199 202 205		● D 4000K CRI > 90
208 211 214 217		
220 223 226 229		
232 235 238 241		
244 247 250		

Custom lengths upon request

SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N p. 291

PROFILE LENGTH N. SUSPENSION CABLES H 300 cm

97 - 118 cm	2
121 - 199 cm	3
202 - 298 cm	4

EXAMPLE CODE COMPOSITION



DOVE LA TECNOLOGIA INCONTRA IL DESIGN

I segnapasso indoor DGA offrono una vasta gamma di soluzioni che uniscono ottime prestazioni a un design raffinato. La proposta comprende prodotti più tecnici e alternative più decorative, tra cui una linea firmata da designer. Ogni soluzione si distingue per la compattezza delle forme, la cura dei dettagli e l'uso di materiali di alta qualità, caratteristiche che riflettono l'impegno di DGA nel creare prodotti dove funzionalità e design si integrano perfettamente.

WHERE TECHNOLOGY MEETS DESIGN

The indoor DGA step lights provide a diverse array of solutions that blend exceptional performance with sophisticated design. Our offerings encompass both technical products and decorative alternatives, including a collection crafted by renowned designers. Each solution is distinguished by its compact form, meticulous attention to detail, and the use of premium materials, qualities that embody DGA's dedication to creating products where functionality and aesthetics harmoniously coexist.

Step Lights




Eclissi Series design by Draw Studio



Eclissi 360


24V 4W
Lumen Output: 3000K CRI > 90 24Vdc - 60 lm
Diffused emission 7P4748. _ _ _

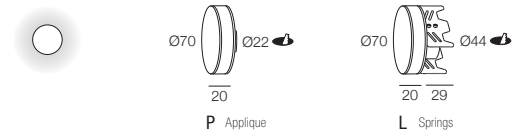

FINISH	CCT	FIXING
● X2 PVD Satin Black	● U 2200K	P Applique
● Y2 PVD Polished Black	● Y 2700K	L Springs
● T Titanium	● 6 3000K	
● B Dark Bronze	● W 3000K CRI > 90	
● Y1 PVD Gold Chrome	● 9 4000K	
● X4 PVD Satin Gold		
● Z Champagne Gold		
● X3 PVD Rose Gold		
● Y3 PVD Shiny Chrome		

Eclissi 180


24V 4W
Lumen Output: 3000K CRI > 90 24Vdc - 40 lm
Diffused emission 7P4749. _ _ _

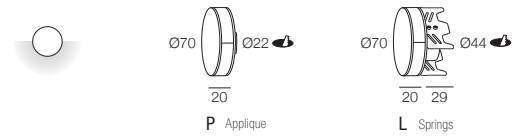

FINISH	CCT	FIXING
● X2 PVD Satin Black	● U 2200K	P Applique
● Y2 PVD Polished Black	● Y 2700K	L Springs
● T Titanium	● 6 3000K	
● B Dark Bronze	● W 3000K CRI > 90	
● Y1 PVD Gold Chrome	● 9 4000K	
● X4 PVD Satin Gold		
● Z Champagne Gold		
● X3 PVD Rose Gold		
● Y3 PVD Shiny Chrome		

Eclissi 90


24V 4W
Lumen Output: 3000K CRI > 90 24Vdc - 20 lm
Diffused emission 7P4750. _ _ _

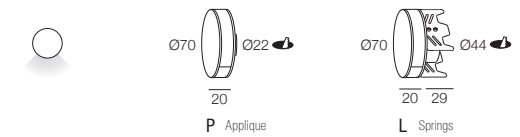

FINISH	CCT	FIXING
● X2 PVD Satin Black	● U 2200K	P Applique
● Y2 PVD Polished Black	● Y 2700K	L Springs
● T Titanium	● 6 3000K	
● B Dark Bronze	● W 3000K CRI > 90	
● Y1 PVD Gold Chrome	● 9 4000K	
● X4 PVD Satin Gold		
● Z Champagne Gold		
● X3 PVD Rose Gold		
● Y3 PVD Shiny Chrome		

Eclissi 90 x 2

24V 4W
Lumen Output: 3000K CRI > 90 24Vdc - 20 lm x 2
Diffused emission 7P4751. _ _ _

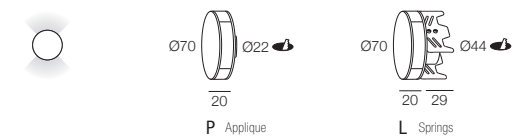


FINISH	CCT	FIXING
● X2 PVD Satin Black	● U 2200K	P Applique
● Y2 PVD Polished Black	● Y 2700K	L Springs
● T Titanium	● 6 3000K	
● B Dark Bronze	● W 3000K CRI > 90	
● Y1 PVD Gold Chrome	● 9 4000K	
● X4 PVD Satin Gold		
● Z Champagne Gold		
● X3 PVD Rose Gold		
● Y3 PVD Shiny Chrome		

SUGGESTED DRIVERS (not included)

24Vdc CV20-F-24-N p. 291

ACCESSORIES



Junction Box for P Applique version
A01611.60

EXAMPLE CODE COMPOSITION







IP40
 350 / 500
 40 g
 2

Lui


		1W	2W
	350 / 500mA	350mA - 15 lm	500mA - 25 lm
	Lumen Output 3000K		
Lui 01	45° Emission	724852. __	724853. __
Lui 02	45° Emission	724854. __	724855. __
Lui 03	45° Emission	724856. __	724857. __



Lui 01



Lui 02



Lui 03

FINISH

- 4 Black
- 3 Gray
- 7 White
- 6 Stainless Steel AISI 316L

CCT

- U 2200K
- Y 2700K
- 6 3000K
- 9 4000K

SUGGESTED DRIVERS (not included)

350mA **CC20-F-350-N** p. 282
 500mA **CC20-F-500-N** p. 284

ACCESSORIES

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




Aluminum recessed box
A01578.40



Aluminum recessed box with edge
A01577.0



Spring mounting support
A01579.60



Frame for trimless installation
A01576.30




Hole saw for trimless installation
A00832.H0




IP40
 350 / 500
 40 g
 2

Lei


		1W	2W
	350 / 500mA	350mA - 25 lm	500mA - 35 lm
	Lumen Output 3000K		
Lei 01	45° Emission	724858. __	724859. __
Lei 02	45° Emission	724860. __	724861. __
Lei 03	45° Emission	724862. __	724863. __



Lei 01



Lei 02



Lei 03

FINISH

- 4 Black
- 3 Gray
- 7 White
- 6 Stainless Steel AISI 316L

CCT

- U 2200K
- Y 2700K
- 6 3000K
- 9 4000K

SUGGESTED DRIVERS (not included)

350mA **CC20-F-350-N** p. 282
 500mA **CC20-F-500-N** p. 284

ACCESSORIES

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




Aluminum recessed box
A01578.40



Aluminum recessed box with edge
A01581.0



Spring mounting support
A01579.60



Frame for trimless installation
A01580.30




Hole saw for trimless installation
A00832.H0




IP40 350/500 55 g 2 SD CM

Lui Solovetro


	350 / 500mA Lumen Output: 3000K	1W 350mA - 15 lm	2W 500mA - 25 lm
Lui Solovetro 01	45° Emission	724605._ _	724606._ _
Lui Solovetro 02	45° Emission	724607._ _	724608._ _
Lui Solovetro 03	45° Emission	724609._ _	724610._ _



Lui Solovetro 01



Lui Solovetro 02



Lui Solovetro 03

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
○ 7 White	● 6 3000K
	● 9 4000K

SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N p. 282
500mA CC20-F-500-N p. 284

ACCESSORIES

EXAMPLE CODE COMPOSITION




Aluminum recessed box
A01578.40



Aluminum recessed box with edge
A01577._0



Spring mounting support
A01579.60



Frame for trimless installation
A01576.30



Hole saw for trimless installation
A00832.H0


123456 CCT FINISH




IP40 350/500 55 g 2 SD CM

Lei Solovetro


	350 / 500mA Lumen Output: 3000K	1W 350mA - 25 lm	2W 500mA - 35 lm
Lei Solovetro 01	45° Emission	724611._ _	724612._ _
Lei Solovetro 02	45° Emission	724613._ _	724614._ _
Lei Solovetro 03	45° Emission	724615._ _	724616._ _



Lei Solovetro 01



Lei Solovetro 02



Lei Solovetro 03

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
○ 7 White	● 6 3000K
	● 9 4000K

SUGGESTED DRIVERS (not included)

350mA CC20-F-350-N p. 282
500mA CC20-F-500-N p. 284

ACCESSORIES

EXAMPLE CODE COMPOSITION




Aluminum recessed box
A01578.40



Aluminum recessed box with edge
A01581._0



Spring mounting support
A01579.60



Frame for trimless installation
A01580.30



Hole saw for trimless installation
A00832.H0

123456 CCT FINISH

Projectors


SOLUZIONI FLESSIBILI PER OGNI SFIDA

I proiettori indoor di DGA si distinguono per la loro capacità di valorizzare spazi e dettagli, grazie a una gamma variabile di potenze e dimensioni. Questi apparecchi non solo offrono prestazioni luminose di alta qualità, ma si adattano anche a molteplici esigenze progettuali, consentendo una flessibilità di posizionamento unica. La precisione, l'uniformità e la direzionabilità del fascio di luce sono caratteristiche distintive, che rendono i proiettori DGA ideali per ambienti come il retail e l'hospitality.

FLEXIBLE SOLUTIONS FOR EVERY CHALLENGE


The indoor projectors by DGA stand out for their ability to enhance spaces and details, thanks to a variable range of powers and sizes. These devices not only provide high-quality luminous performance but also adapt to multiple design needs, allowing for unique positioning flexibility. The precision, uniformity, and directability of the light beam are distinctive features that make DGA projectors ideal for environments such as retail and hospitality.



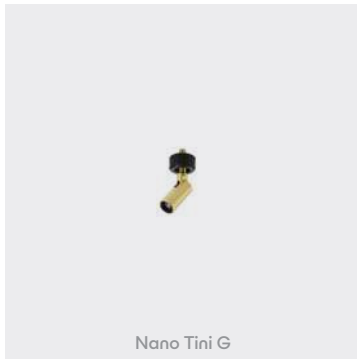


Nano Tini G


IP40
 350/500
 10 g
 2




G Ring Nut




M Magnetic



P Applique



S Screw base



J Jack

Nano Tini

	350 / 500mA	1W	2W [1]
	Lumen Output:3000K CRI > 90	350mA - 50 lm	500mA - 80 lm
20° Lens		784015. _ _ _	784016. _ _ _
30° Lens		764015. _ _ _	764016. _ _ _
50° Lens		7D4015. _ _ _	7D4016. _ _ _

FINISH	CCT	FIXING
● 4 Black	● U 2200K	G Ring Nut
● E Massive Brass	● X 2700K CRI > 90	M Magnetic
● I Gold Chrome	● W 3000K CRI > 90	P Applique
● 3 Gray	● K 3500K CRI > 90	S Screw base
● 1 Shiny Chrome	● D 4000K CRI > 90	J Jack
○ 7 White		

[1] To be mounted on metal surfaces only

SUGGESTED DRIVERS (not included)

350mA	CC20-F-350-N	p. 282
500mA	CC20-F-500-N	p. 284

ACCESSORIES



Low glare visor
A01419. _ 0



Low glare snoot
A01420. _ 0




Jack input base
A01370. _ 0



Blanking plug
A01437. _ 0

EXAMPLE CODE COMPOSITION

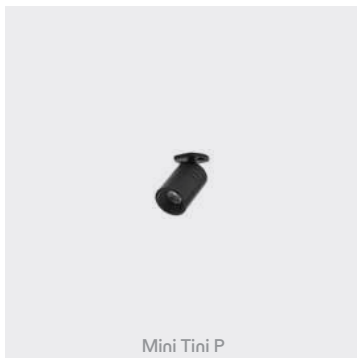


Mini Tini P


IP40
 350/500
 30 g
 2



G Ring Nut



Mini Tini with visor
G Ring Nut




M Magnetic



Mini Tini with visor
M Magnetic



P Applique



Mini Tini with visor
P Applique

Mini Tini

	350 / 500mA	1W	2W
	Lumen Output:3000K CRI > 90	350mA - 80 lm	500mA - 110 lm
10° Lens		7A3742. _ _ _	7A3743. _ _ _
25° Lens		7G3742. _ _ _	7G3743. _ _ _
40° Lens		743742. _ _ _	743743. _ _ _
60° Lens		753742. _ _ _	753743. _ _ _

FINISH	CCT	FIXING
● 4 Black	● U 2200K	G Ring Nut
● T Titanium	● X 2700K CRI > 90	M Magnetic
● Z Champagne Gold	● W 3000K CRI > 90	P Applique
● 3 Gray	● K 3500K CRI > 90	
○ 7 White	● D 4000K CRI > 90	
	● 1 5000K	

Mini Tini with visor

	350 / 500mA	1W	2W
	Lumen Output:3000K CRI > 90	350mA - 65 lm	500mA - 90 lm
10° Lens		734034. _ _ _	734035. _ _ _
25° Lens		7G4034. _ _ _	7G4035. _ _ _
40° Lens		744034. _ _ _	744035. _ _ _
60° Lens		754034. _ _ _	754035. _ _ _

SUGGESTED DRIVERS (not included)

350mA	CC20-F-350-N	p. 282
500mA	CC20-F-500-N	p. 284

ACCESSORIES




Template for P Applique fixing
A01658.60

EXAMPLE CODE COMPOSITION





- IP40
- 350
700
-
- 70 g
- 2

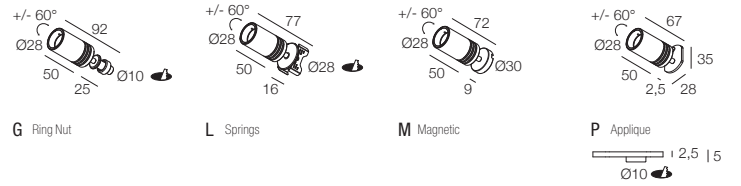

Tini

350 / 700mA Lumen Output: 3000K	1W 350mA - 110 lm	2W 700mA - 210 lm	3W 350mA - 320 lm
10° Lens	733192. _ _ _	733193. _ _ _	
15° Lens			7A3194. _ _ _
30° Lens	763192. _ _ _	763193. _ _ _	763194. _ _ _
40° Lens	743192. _ _ _	743193. _ _ _	
60° Lens			753194. _ _ _
Elliptical Lens	773192. _ _ _	773193. _ _ _	773194. _ _ _

- | FINISH | CCT | FIXING |
|--------------------|--------------------|------------|
| ● 4 Black | ● U 2200K | G Ring Nut |
| ● T Titanium | ● Y 2700K | L Springs |
| ● Z Champagne Gold | ● X 2700K CRI > 90 | M Magnetic |
| ● 3 Gray | ● 6 3000K | P Applique |
| ● 7 White | ● W 3000K CRI > 90 | |
| | ● 9 4000K | |
| | ● 1 5000K | |

SUGGESTED DRIVERS (not included)

- 350mA **CC20-F-350-N** p. 282
- 700mA **CC20-F-700-N** p. 286

ACCESSORIES


- 38
 Low glare visor
A00665_0
- 10
 Low glare snoot
A00666_0

EXAMPLE CODE COMPOSITION





IP40	500	700	900	140 g	2

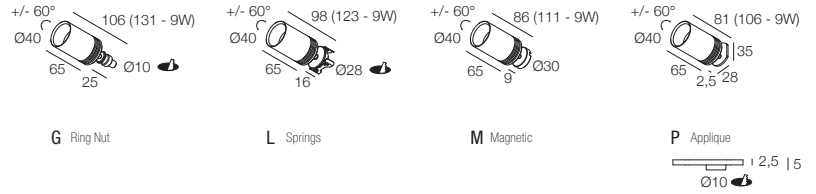


Tono

	500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K		900mA - 250 lm	500mA - 520 lm	700mA - 700 lm
3° Lens		7T3620. _ _ _		
10° Lens			733619. _ _ _	733748. _ _ _
30° Lens			763619. _ _ _	763748. _ _ _
50° Lens			7D3619. _ _ _	7D3748. _ _ _


FINISH	CCT	FIXING
● 4 Black	● U 2200K	G Ring Nut
● T Titanium	● Y 2700K	L Springs
● Z Champagne Gold	● 6 3000K	M Magnetic
● 3 Gray	● W 3000K CRI > 90	P Applique
○ 7 White	● J 3500K	
	● 9 4000K	

Tono with hex louver

	500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K		900mA - 170 lm	500mA - 410 lm	700mA - 540 lm
3° Lens		7T3622. _ _ _		
10° Lens			733621. _ _ _	733749. _ _ _
30° Lens			763621. _ _ _	763749. _ _ _
50° Lens			7D3621. _ _ _	7D3749. _ _ _



IP40	500	700	900	180 g	2



Tono P90

	500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K		900mA - 250 lm	500mA - 520 lm	700mA - 700 lm
3° Lens		7T4045. _ _		
10° Lens			734046. _ _	734047. _ _
30° Lens			764046. _ _	764047. _ _
50° Lens			7D4046. _ _	7D4047. _ _

FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● Z Champagne Gold	● 6 3000K
● 3 Gray	● W 3000K CRI > 90
○ 7 White	● J 3500K
	● 9 4000K

Tono P90 with hex louver

	500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K		900mA - 170 lm	500mA - 410 lm	700mA - 540 lm
3° Lens		7T4048. _ _ _		
10° Lens			734049. _ _	734050. _ _
30° Lens			764049. _ _	764050. _ _
50° Lens			7D4049. _ _	7D4050. _ _

SUGGESTED DRIVERS (not included)


500mA	CC20-F-500-N	p. 284
700mA	CC20-F-700-N	p. 286
900mA	CC20-F-900-N	p. 287

EXAMPLE CODE COMPOSITION





IP40 500/700 170 g 2 2.5

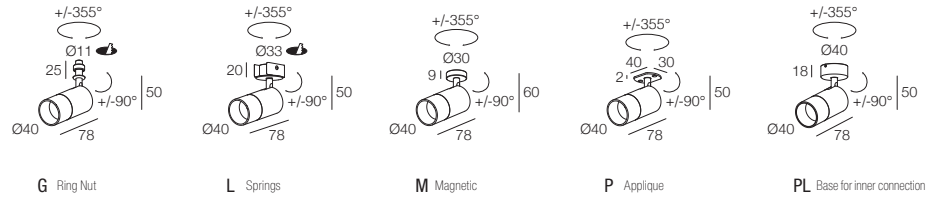

Ariel

[1] 14° Lens not interchangeable


500 / 700mA Lumen Output: 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4597	7Q4598
18° Lens	784597	784598
24° Lens	7G4597	7G4598
33° Lens	7E4597	7E4598
52° Lens	754597	754598

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	G Ring Nut
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	L Springs
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Magnetic
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	P Applique
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	PL Base for inner connection
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
○ 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

Plug&Play System



IP40 500/600 210 g P&P 2 2.6

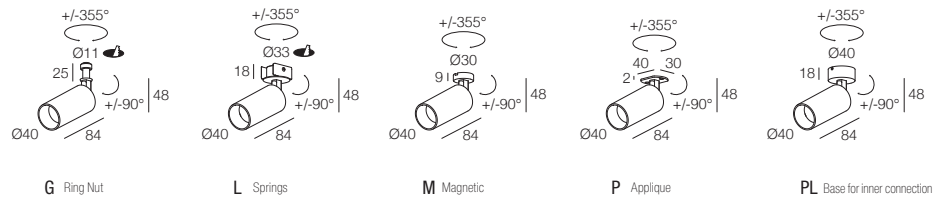

Ariel Plug&Play

500 / 600mA Lumen Output: 3000K	9W 500mA - 900 lm	11W 600mA - 1000 lm
14° Lens	7Q4623	7Q4624
18° Lens	784623	784624
24° Lens	7G4623	7G4624
33° Lens	7E4623	7E4624
52° Lens	754623	754624

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	G Ring Nut
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	L Springs
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Magnetic
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	P Applique
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	PL Base for inner connection
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
○ 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

SUGGESTED DRIVERS (not included)


500mA	CC20-F-500-N	p. 284
600mA	CC20-F-600-N	p. 285
700mA	CC20-F-700-N	p. 286

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






IP40	500 700		290 g	Ø51	2	2,5

Ariel PN-m fixing frame

FIXING FRAME A01727._0

FRAME FINISH

_ See module finish



Ariel PN-m module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE

	500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4817.____	7Q4817.____	7Q4818.____
18° Lens	784817.____	784817.____	784818.____
24° Lens	7G4817.____	7G4817.____	7G4818.____
33° Lens	7E4817.____	7E4817.____	7E4818.____
52° Lens	754817.____	754817.____	754818.____

FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- 8 Satin Gold
- I Gold Chrome
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

Plug&Play System




IP40	500 600		330 g	P&P	Ø51	2	2,6

Ariel PN-m Plug&Play fixing frame

FIXING FRAME A01727._0

FRAME FINISH

_ See module finish



Ariel PN-m Plug&Play module

FIXING FRAME



MODULE

	500 / 600mA Lumen Output 3000K	9W 500mA - 900 lm	11W 600mA - 1000 lm
14° Lens	7Q4819.____	7Q4819.____	7Q4820.____
18° Lens	784819.____	784819.____	784820.____
24° Lens	7G4819.____	7G4819.____	7G4820.____
33° Lens	7E4819.____	7E4819.____	7E4820.____
52° Lens	754819.____	754819.____	754820.____

FINISH

- H Black
- M8 Brown
- G3 Gray
- C Gothic Cement
- G7 Beige Gray
- A6 Gray White
- S Warm White
- 7 White

CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- X1 2700K CRI > 95
- 6 3000K
- W 3000K CRI > 90
- W1 3000K CRI > 95
- K 3500K CRI > 90
- K1 3500K CRI > 95
- D 4000K CRI > 90

DECORATIVE RING

- 4 Black
- 8 Satin Gold
- I Gold Chrome
- N Satin Nickel
- 1 Shiny Chrome

OPTICAL FILTER

- W Without Filter
- E Elliptical Filter
- H Hex Louver
- P Prismatic Filter
- S Softening Lens

SUGGESTED DRIVERS (not included)


500mA	CC10-F-500-SI	p. 284
600mA	CC23-F-600-SP	p. 285
700mA	CC23-F-700-SP	p. 286

INTERCHANGEABLE ACCESSORIES



p. 260


EXAMPLE CODE COMPOSITION





Ariel PN-F fixing frame

FIXING FRAME A01726.30



Ariel PN-F module

[1] 14° Lens not interchangeable

FIXING FRAME



MODULE

	500 / 700mA Lumen Output 3000K	9W 500mA - 900 lm	13W 700mA - 1100 lm
14° Lens [1]	7Q4817.____	7Q4817.____	7Q4818.____
18° Lens	784817.____	784817.____	784818.____
24° Lens	7G4817.____	7G4817.____	7G4818.____
33° Lens	7E4817.____	7E4817.____	7E4818.____
52° Lens	754817.____	754817.____	754818.____


FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

● Plug&Play System



Ariel PN-F Plug&Play fixing frame

FIXING FRAME A01726.30



Ariel PN-F Plug&Play module

FIXING FRAME



MODULE

	500 / 600mA Lumen Output 3000K	9W 500mA - 900 lm	11W 600mA - 1000 lm
14° Lens	7Q4819.____	7Q4819.____	7Q4820.____
18° Lens	784819.____	784819.____	784820.____
24° Lens	7G4819.____	7G4819.____	7G4820.____
33° Lens	7E4819.____	7E4819.____	7E4820.____
52° Lens	754819.____	754819.____	754820.____

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)

500mA	CC10-F-500-SI	p. 284
600mA	CC23-F-600-SP	p. 285
700mA	CC23-F-700-SP	p. 286


INTERCHANGEABLE ACCESSORIES



p. 260

Hole saw
A00832.H0


EXAMPLE CODE COMPOSITION





Saturno PL

- IP40
- 500
- 450 g
- 2
- SD CM
- TM 66

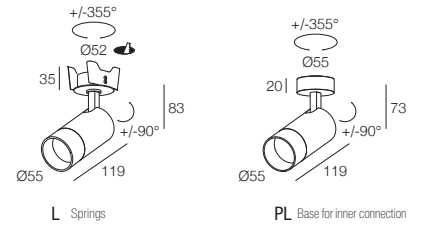


Saturno

[1] 12° Lens not interchangeable

500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4770._____
18° Lens	784770._____
24° Lens	7G4770._____
33° Lens	7E4770._____
52° Lens	754770._____


FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	L Springs
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	PL Base for inner connection
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

● Plug&Play System

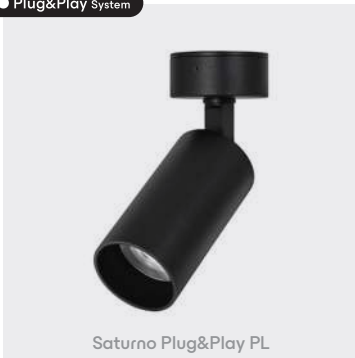

Saturno Plug&Play PL

- IP40
- 500
- 450 g
- P&P
- 2
- SD CM
- TM 66

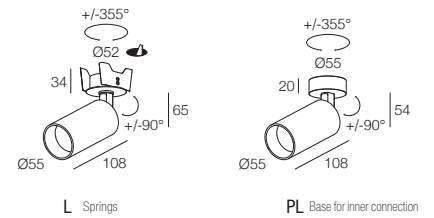

Saturno Plug&Play

500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens	7Q4769._____
18° Lens	784769._____
24° Lens	7G4769._____
33° Lens	7E4769._____
52° Lens	754769._____

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	L Springs
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	PL Base for inner connection
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

SUGGESTED DRIVERS (not included)


500mA CC20-F-500-N p. 284

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 470 g
- Ø51
- 2
- 2,5

Saturno PN-m fixing frame

FIXING FRAME A01727._0

FRAME FINISH

_ See module finish



Saturno PN-m module

[1] 12° Lens not interchangeable

FIXING FRAME



MODULE



500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4829._ _ _ _
18° Lens	784829._ _ _ _
24° Lens	7G4829._ _ _ _
33° Lens	7E4829._ _ _ _
52° Lens	754829._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

● Plug&Play System




- IP40
- 500
- 550 g
- P&P
- Ø51
- 2
- 2,6

Saturno PN-m Plug&Play fixing frame

FIXING FRAME A01727._0

FRAME FINISH

_ See module finish



Saturno PN-m Plug&Play module

FIXING FRAME



MODULE



500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens	7Q4830._ _ _ _
18° Lens	784830._ _ _ _
24° Lens	7G4830._ _ _ _
33° Lens	7E4830._ _ _ _
52° Lens	754830._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

SUGGESTED DRIVERS (not included)


500mA CC23-F-500-SP p. 284

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 500
- 450 g
- Ø51
- 2
- TM 66

Saturno PN-F fixing frame

FIXING FRAME A01726.30



Saturno PN-F module

[1] 12° Lens not interchangeable

FIXING FRAME

MODULE



	500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens [1]	7Q4829	_____
18° Lens	784829	_____
24° Lens	7G4829	_____
33° Lens	7E4829	_____
52° Lens	754829	_____

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		


● Plug&Play System



- IP40
- 500
- 530 g
- P&P
- Ø51
- 2
- TM 66

Saturno PN-F Plug&Play fixing frame

FIXING FRAME A01726.30



Saturno PN-F Plug&Play module

FIXING FRAME

MODULE



	500mA Lumen Output 3000K	18W 500mA - 2100 lm
12° Lens	7Q4830	_____
18° Lens	784830	_____
24° Lens	7G4830	_____
33° Lens	7E4830	_____
52° Lens	754830	_____

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		


SUGGESTED DRIVERS (not included)

500mA CC23-F-500-SP p. 284

INTERCHANGEABLE ACCESSORIES



EXAMPLE CODE COMPOSITION



ILLUMINAZIONE A BINARIO: PRECISIONE E VERSATILITÀ

La luce diventa parte integrante dell'architettura, modellando gli spazi con precisione ed equilibrio. I proiettori a binario a bassa tensione di DGA uniscono tecnologia avanzata ed estetica minimale, garantendo versatilità e un impatto visivo discreto. Disponibili nelle versioni Micro e Multi, si adattano a contesti raffinati, dal retail di alta gamma agli spazi museali ed espositivi.

TRACK LIGHTING: PRECISION AND VERSATILITY

Light becomes an integral part of architecture, shaping spaces with precision and balance. DGA's low-voltage track projectors combine advanced technology with a minimalist aesthetic, ensuring versatility and a discreet visual impact. Available in Micro and Multi versions, they adapt to sophisticated settings, from high-end retail to museum and exhibition spaces.


Low Voltage Track Projectors



Dimming code


F On - Off

On - Off system

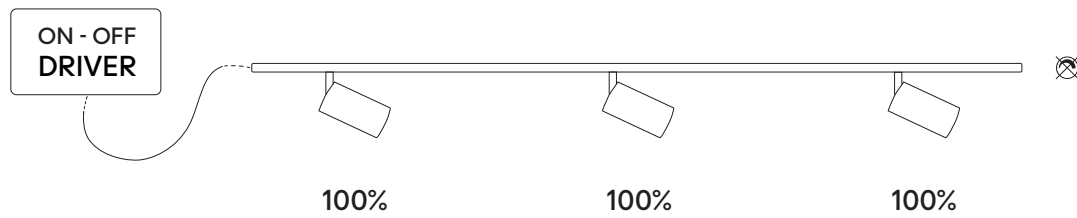


D Dali Dimmable ^[1]

On board DALI interface, each fitting can be controlled individually

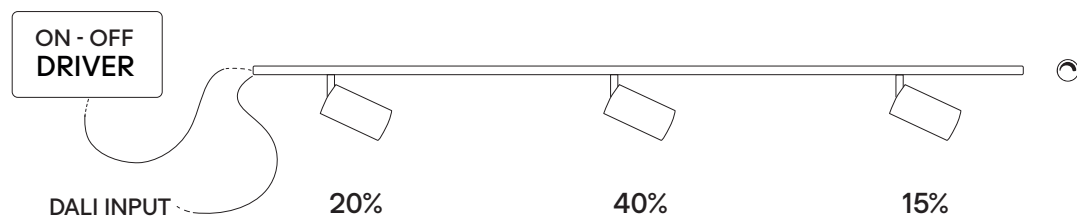



M Broadcast Dimmable ^[2]

All fittings will be controlled at the same time, according to the dimming system

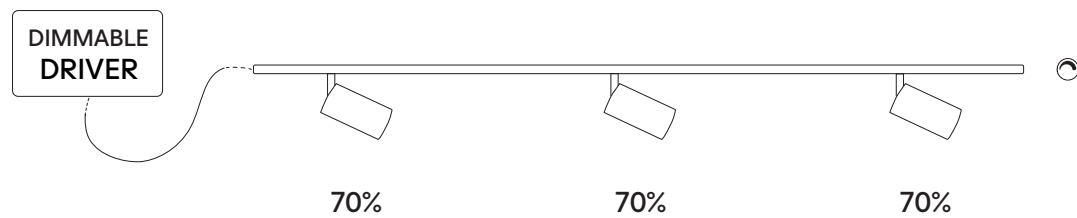

[1] DGA does not supply DALI controllers

[2] Dali, 0/1-10V, Push, Potentiometer, Casambi, Triac

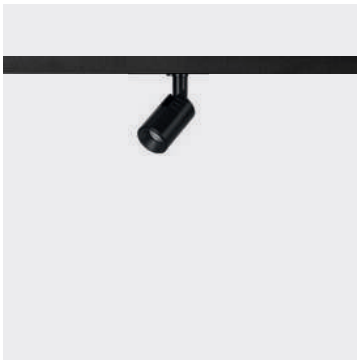

Mini Tini B Micro with visor


Mini Tini B Micro

	24-48Vdc Lumen Output 3000K CRI > 90	2W 24-48Vdc - 80 lm	3W 24-48Vdc - 110 lm
10° Lens		734787. ___	734788. ___
25° Lens		7G4787. ___	7G4788. ___
40° Lens		744787. ___	744788. ___
60° Lens		754787. ___	754788. ___

FINISH	CCT	DIMMING
● H Black	● U 2200K	F ON-OFF
● B Dark Bronze	● X 2700K CRI > 90	D DALI
○ 7 White	● W 3000K CRI > 90	M Broadcast
	● K 3500K CRI > 90	
	● D 4000K CRI > 90	
	● 1 5000K	

Mini Tini B Micro with visor

	24-48Vdc Lumen Output 3000K CRI > 90	2W 24-48Vdc - 65 lm	3W 24-48Vdc - 90 lm
10° Lens		734913. ___	734914. ___
25° Lens		7G4913. ___	7G4914. ___
40° Lens		744913. ___	744914. ___
60° Lens		754913. ___	754914. ___



Tini B Micro

	24-48Vdc Lumen Output 3000K	4W 24-48Vdc - 320 lm
15° Lens		7A4790. ___
30° Lens		764790. ___
60° Lens		754790. ___
Elliptical Lens		774790. ___

FINISH	CCT	DIMMING
● H Black	● U 2200K	F ON-OFF
● B Dark Bronze	● Y 2700K	D DALI
○ 7 White	● X 2700K CRI > 90	M Broadcast
	● 6 3000K	
	● W 3000K CRI > 90	
	● 9 4000K	
	● 1 5000K	

SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 291
48Vdc	CV150-F-48-N	p. 293

TRACKS ACCESSORIES


Micro track and accessories	p. 268
-----------------------------	--------

EXAMPLE CODE COMPOSITION





IP40
 24V / 48V
 190 g
 2



Tono B Micro

24-48Vdc Lumen Output 3000K	3W 24-48Vdc - 250 lm	7W 24-48Vdc - 520 lm	10W 24-48Vdc - 700 lm
3° Lens	7T4797. _ _ _		
10° Lens		734798. _ _ _	734799. _ _ _
30° Lens		764798. _ _ _	764799. _ _ _
50° Lens		7D4798. _ _ _	7D4799. _ _ _

FINISH	CCT	DIMMING
● H Black	● U 2200K	F ON-OFF
● B Dark Bronze	● Y 2700K	D DALI
○ 7 White	● 6 3000K	M Broadcast
	● W 3000K CRI > 90	
	● J 3500K	
	● 9 4000K	

Tono B Micro with hex louver

24-48Vdc Lumen Output 3000K	3W 24-48Vdc - 170 lm	7W 24-48Vdc - 410 lm	10W 24-48Vdc - 540 lm
3° Lens	7T4800. _ _ _		
10° Lens		734801. _ _ _	734802. _ _ _
30° Lens		764801. _ _ _	764802. _ _ _
50° Lens		7D4801. _ _ _	7D4802. _ _ _

SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 291
48Vdc	CV150-F-48-N	p. 293

TRACKS ACCESSORIES


Micro track and accessories p. 268

EXAMPLE CODE COMPOSITION





IP40
 24V / 48V
 150 g
 2
 2,5




Ariel B Micro

24-48Vdc Lumen Output 3000K	10W 24-48Vdc - 900 lm	14W 24-48Vdc - 1100 lm
14° Lens [1]	7Q4805	7Q4806
18° Lens	784805	784806
24° Lens	7G4805	7G4806
33° Lens	7E4805	7E4806
52° Lens	754805	754806


[1] 14° Lens not interchangeable

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Broadcast
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
○ 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

● Plug&Play System

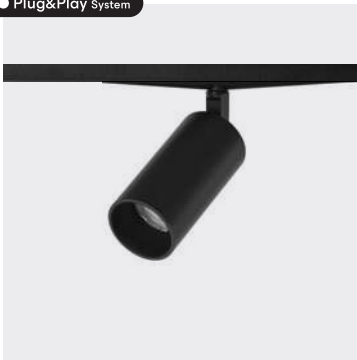

IP40
 24V / 48V
 220 g
 P&P
 2
 2,6



Ariel B Micro Plug&Play

24-48Vdc Lumen Output 3000K	10W 24-48Vdc - 900 lm	12W 24-48Vdc - 1000 lm
14° Lens	7Q4809	7Q4810
18° Lens	784809	784810
24° Lens	7G4809	7G4810
33° Lens	7E4809	7E4810
52° Lens	754809	754810

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Broadcast
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
○ 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 291
48Vdc	CV150-F-48-N	p. 293

TRACKS ACCESSORIES


Micro track and accessories p. 268


INTERCHANGEABLE ACCESSORIES




p. 260

EXAMPLE CODE COMPOSITION



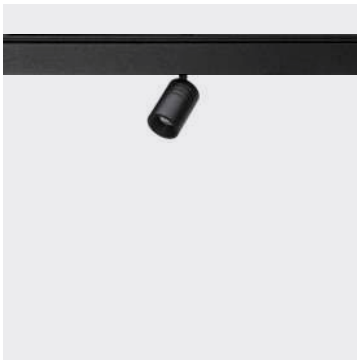

IP40
 24V / 48V
 35 g
 2




Mini Tini B Multi

	24-48Vdc Lumen Output 3000K CRI > 90	2W 24-48Vdc - 80 lm	3W 24-48Vdc - 110 lm
10° Lens	734785. _ _ _		734786. _ _ _
25° Lens	7G4785. _ _ _		7G4786. _ _ _
40° Lens	744785. _ _ _		744786. _ _ _
60° Lens	754785. _ _ _		754786. _ _ _

FINISH	CCT	DIMMING
● H Black	● U 2200K	F ON-OFF
● B Dark Bronze	● X 2700K CRI > 90	D DALI
○ 7 White	● W 3000K CRI > 90	M Broadcast
	● K 3500K CRI > 90	
	● D 4000K CRI > 90	
	● 1 5000K	



IP40
 24V / 48V
 100 g
 2



Tini B Multi

	24-48Vdc Lumen Output 3000K	4W 24-48Vdc - 320 lm
15° Lens	7A4789. _ _ _	
30° Lens	764789. _ _ _	
60° Lens	754789. _ _ _	
Elliptical Lens	774789. _ _ _	

FINISH	CCT	DIMMING
● H Black	● U 2200K	F ON-OFF
● B Dark Bronze	● Y 2700K	D DALI
○ 7 White	● X 2700K CRI > 90	M Broadcast
	● 6 3000K	
	● W 3000K CRI > 90	
	● 9 4000K	
	● 1 5000K	

SUGGESTED DRIVERS (not included)


24Vdc	CV70-F-24-N	p. 291
48Vdc	CV150-F-48-N	p. 293

TRACKS ACCESSORIES

Multi track and accessories	p. 272
-----------------------------	--------

EXAMPLE CODE COMPOSITION





Tono B Multi

24-48Vdc Lumen Output 3000K	3W 24-48Vdc - 250 lm	7W 24-48Vdc - 520 lm	10W 24-48Vdc - 700 lm
3° Lens	7T4791. _ _ _		
10° Lens		734792. _ _ _	734793. _ _ _
30° Lens		764792. _ _ _	764793. _ _ _
50° Lens		7D4792. _ _ _	7D4793. _ _ _

FINISH	CCT	DIMMING
● H Black	● U 2200K	F ON-OFF
● B Dark Bronze	● Y 2700K	D DALI
○ 7 White	● 6 3000K	M Broadcast
	● W 3000K CRI > 90	
	● J 3500K	
	● 9 4000K	

Tono B Multi with hex louver

24-48Vdc Lumen Output 3000K	3W 24-48Vdc - 170 lm	7W 24-48Vdc - 410 lm	10W 24-48Vdc - 540 lm
3° Lens	7T4794. _ _ _		
10° Lens		734795. _ _ _	734796. _ _ _
30° Lens		764795. _ _ _	764796. _ _ _
50° Lens		7D4795. _ _ _	7D4796. _ _ _

SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 291
48Vdc	CV150-F-48-N	p. 293

TRACKS ACCESSORIES


Multi track and accessories	p. 272
-----------------------------	--------

EXAMPLE CODE COMPOSITION





IP40
 24V / 48V
 160 g
 2
 2,5




Ariel B Multi

24-48Vdc Lumen Output 3000K	10W 24-48Vdc - 900 lm	14W 24-48Vdc - 1100 lm
14° Lens [1]	7Q4803	7Q4804
18° Lens	784803	784804
24° Lens	7G4803	7G4804
33° Lens	7E4803	7E4804
52° Lens	754803	754804


[1] 14° Lens not interchangeable

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Broadcast
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
○ 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

● Plug&Play System

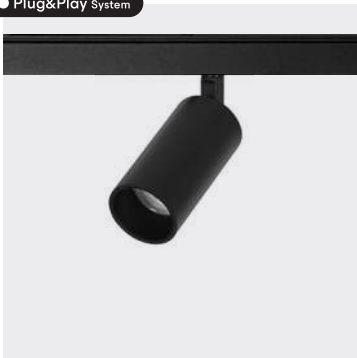

IP40
 24V / 48V
 230 g
 P&P
 2
 2,6



Ariel B Multi Plug&Play

24-48Vdc Lumen Output 3000K	10W 24-48Vdc - 900 lm	12W 24-48Vdc - 1000 lm
14° Lens	7Q4807	7Q4808
18° Lens	784807	784808
24° Lens	7G4807	7G4808
33° Lens	7E4807	7E4808
52° Lens	754807	754808

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Broadcast
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
○ 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 291
48Vdc	CV150-F-48-N	p. 293

TRACKS ACCESSORIES


Multi track and accessories p. 272

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION






- IP40
- 48V
- 370 g
- 2
- 2,5

Saturno B Multi

48Vdc Lumen Output 3000K	19W 48Vdc - 2100 lm
12° Lens [1]	7Q4815._____
18° Lens	784815._____
24° Lens	7G4815._____
33° Lens	7E4815._____
52° Lens	754815._____

[1] 12° Lens not interchangeable



FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Broadcast
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			


● Plug&Play System



- IP40
- 48V
- 220 g
- P&P
- 2
- 2,6

Saturno B Multi Plug&Play

48Vdc Lumen Output 3000K	19W 48Vdc - 2100 lm
12° Lens	7Q4816._____
18° Lens	784816._____
24° Lens	7G4816._____
33° Lens	7E4816._____
52° Lens	754816._____



FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Broadcast
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

SUGGESTED DRIVERS (not included)

48Vdc CV150-F-48-N p. 293

TRACKS ACCESSORIES


Multi track and accessories p. 272

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION



Mains Voltage Track Projectors

LUCE E PERFORMANCE: SOLUZIONI AVANZATE

I proiettori a binario a tensione di rete DGA combinano affidabilità e performance elevate. Perfetti per ambienti che richiedono flussi luminosi intensi, come negozi e musei, offrono soluzioni versatili con opzioni di montaggio su parete e soffitto, garantendo una facile installazione e manutenzione.


LIGHT AND PERFORMANCE: ADVANCED SOLUTIONS

DGA mains voltage track projectors combine reliability and high performance. Perfect for environments that require intense light output, such as shops and museums, offer versatile solutions with wall and ceiling mounting options, ensuring easy installation and maintenance.





- IP40
- 230V
-
-
-
-
- 450 g
- 2
- 66
-

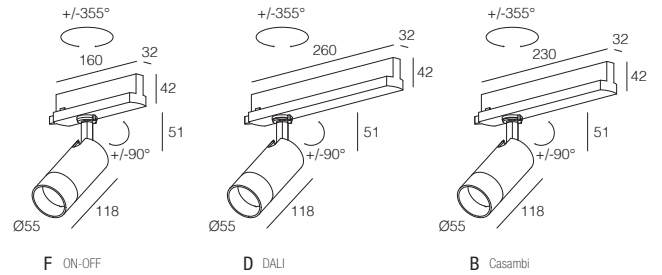

Saturno B

[1] 12° Lens not interchangeable


220-240Vac Lumen Output 3000K	20W 220-240Vac - 2100 lm	25W 220-240Vac - 2400 lm
12° Lens [1]	7Q4821._____	7Q4822._____
18° Lens	784821._____	784822._____
24° Lens	7G4821._____	7G4822._____
33° Lens	7E4821._____	7E4822._____
52° Lens	754821._____	754822._____

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	B Casambi
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

● Plug&Play System



- IP40
- 230V
-
-
-
-
- 450 g
- P&P
- 2
- 66
-

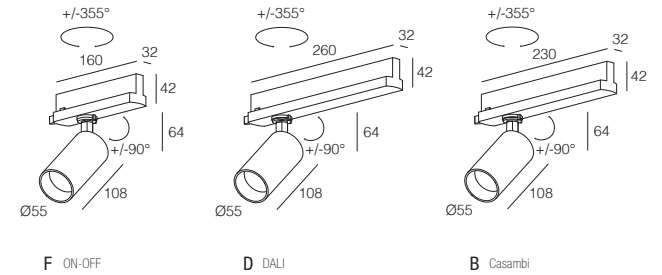

Saturno B Plug&Play

220-240Vac Lumen Output 3000K	20W 220-240Vac - 2100 lm
12° Lens	7Q4823._____
18° Lens	784823._____
24° Lens	7G4823._____
33° Lens	7E4823._____
52° Lens	754823._____

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	B Casambi
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

TRACKS ACCESSORIES


230Vac tracks and accessories p. 276

INTERCHANGEABLE ACCESSORIES




p. 261

EXAMPLE CODE COMPOSITION





- IP40
- 230V
- 450 g
- 2
- SD CM
- TM 66

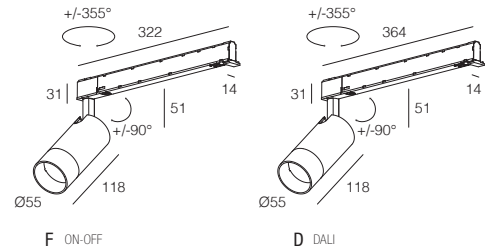

Saturno BF

[1] 12° Lens not interchangeable


220-240Vac Lumen Output 3000K	20W 220-240Vac - 2100 lm	25W 220-240Vac - 2400 lm
12° Lens [1]	7Q4825	7Q4826
18° Lens	784825	784826
24° Lens	7G4825	7G4826
33° Lens	7E4825	7E4826
52° Lens	754825	754826

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

● Plug&Play System



- IP40
- 230V
- 450 g
- P&P
- 2
- SD CM
- TM 66

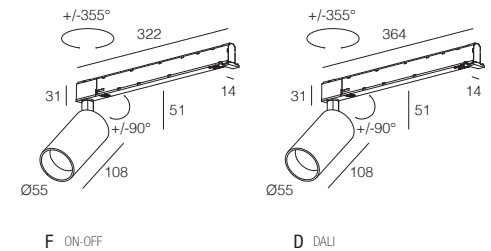

Saturno BF Plug&Play

220-240Vac Lumen Output 3000K	20W 220-240Vac - 2100 lm
12° Lens	7Q4827
18° Lens	784827
24° Lens	7G4827
33° Lens	7E4827
52° Lens	754827

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			

TRACKS ACCESSORIES


230Vac tracks and accessories p. 276

INTERCHANGEABLE ACCESSORIES



p. 261

EXAMPLE CODE COMPOSITION






- IP40
- 230V
-
-
-
- 1100 g
- 2

Marte B

220-240Vac Lumen Output 3000K	35W 220-240Vac - 3700 lm	42W 220-240Vac - 4300 lm
22° Lens	784848.	784880.
26° Lens	7G4848.	7G4880.
38° Lens	744848.	744880.
60° Lens	754848.	754880.

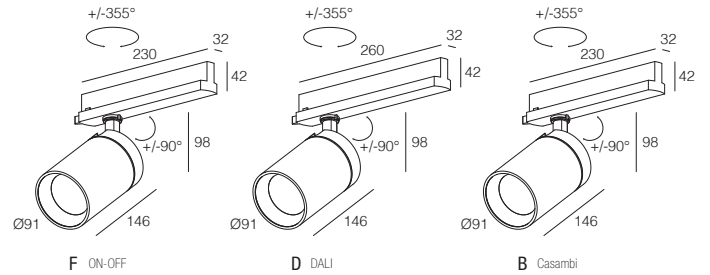

FINISH	CCT	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	H Hex Louver	B Casambi
● C Gothic Cement	● X1 2700K CRI > 95	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		


● Plug&Play System



- IP40
- 230V
-
-
-
- 1200 g
- P&P
- 2

Marte B Plug&Play

220-240Vac Lumen Output 3000K	35W 220-240Vac - 3700 lm	42W 220-240Vac - 4300 lm
22° Lens	784849.	784881.
26° Lens	7G4849.	7G4881.
38° Lens	744849.	744881.
60° Lens	754849.	754881.

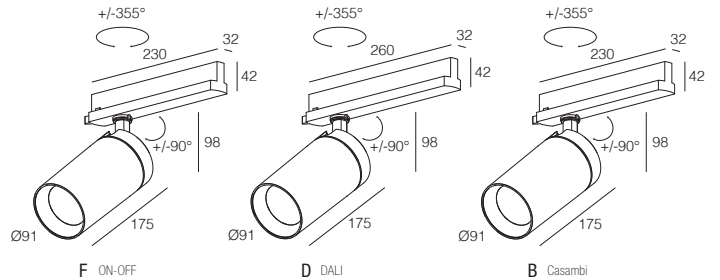

FINISH	CCT	OPTICAL FILTER	DIMMING
● H Black	● U1 2200K CRI > 90	W Without Filter	F ON-OFF
● M8 Brown	● B2 2400K CRI > 90	E Elliptical Filter	D DALI
● G3 Gray	● X 2700K CRI > 90	H Hex Louver	B Casambi
● C Gothic Cement	● X1 2700K CRI > 95	P Prismatic Filter	
● G7 Beige Gray	● 6 3000K	S Softening Lens	
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

TRACKS ACCESSORIES

230Vac tracks and accessories p. 276


INTERCHANGEABLE ACCESSORIES



p. 262

EXAMPLE CODE COMPOSITION

123456.



REGOLA LA LUCE, TRASFORMA LO SPAZIO

I proiettori Zoom rappresentano una soluzione ideale per ambienti retail e museali, dove l'illuminazione deve adattarsi continuamente. Grazie a ottiche avanzate e lenti convesse, offrono un fascio di luce definito che può essere regolato da spot a wide flood con una semplice rotazione della ghiera centrale. Il design minimalista e l'ottica arretrata assicurano discrezione, senza mai sovrastare l'ambiente o gli oggetti esposti. Sono apparecchi ideali per spazi che richiedono alta precisione visiva.

ADJUST THE LIGHT, TRANSFORM THE SPACE

The Zoom projectors represent the ideal solution for retail and museum environments, where lighting must continuously adapt. Thanks to advanced optics and convex lenses, they provide a defined beam of light that can be adjusted from spot to wide flood with a simple rotation of the central ring. Minimalist design and recessed optics ensure a discreet presence without ever overpowering the room or the objects on display. These luminaires are ideal for spaces requiring high visual precision.

Track & Surface Zoom Projectors






IP40
 24V / 48V
 330 g
 2

Tono Zoom B Micro

24-48Vdc 10W
 Lumen Output: 3000K CRI > 90 24-48Vdc - 560 lm

14° > 36° Zoom Lens 7Z4831._ _ _



FINISH	CCT	DIMMING
● H Black	● U1 2200K CRI > 90	F ON-OFF
○ 7 White	● B2 2400K CRI > 90	D DALI
○ W All White	● X 2700K CRI > 90	M Broadcast
	● X1 2700K CRI > 95	
	● 6 3000K	
	● W 3000K CRI > 90	
	● W1 3000K CRI > 95	
	● K 3500K CRI > 90	
	● K1 3500K CRI > 95	
	● D 4000K CRI > 90	




IP40
 24V / 48V
 360 g
 2

Ariel Contour B Micro

24-48Vdc 10W
 Lumen Output: 3000K CRI > 90 24-48Vdc - 510 lm

24° > 35° Zoom Lens 7Z4573._ _ _



FINISH	CCT	DIMMING
● 4 Black	● U1 2200K CRI > 90	F ON-OFF
	● B2 2400K CRI > 90	D DALI
	● X 2700K CRI > 90	M Broadcast
	● X1 2700K CRI > 95	
	● 6 3000K	
	● W 3000K CRI > 90	
	● W1 3000K CRI > 95	
	● K 3500K CRI > 90	
	● K1 3500K CRI > 95	
	● D 4000K CRI > 90	




IP40
 24V / 48V
 370 g
 2

Ariel Contour B Multi

24-48Vdc 10W
 Lumen Output: 3000K CRI > 90 24-48Vdc - 510 lm

24° > 35° Zoom Lens 7Z4574._ _ _



FINISH	CCT	DIMMING
● 4 Black	● U1 2200K CRI > 90	F ON-OFF
	● B2 2400K CRI > 90	D DALI
	● X 2700K CRI > 90	M Broadcast
	● X1 2700K CRI > 95	
	● 6 3000K	
	● W 3000K CRI > 90	
	● W1 3000K CRI > 95	
	● K 3500K CRI > 90	
	● K1 3500K CRI > 95	
	● D 4000K CRI > 90	

SUGGESTED DRIVERS (not included)

24Vdc	CV70-F-24-N	p. 291
48Vdc	CV150-F-48-N	p. 293

TRACKS ACCESSORIES

Micro track and accessories p. 268

EXAMPLE CODE COMPOSITION






Tono Zoom

500mA 9W
Lumen Output: 3000K CRI > 90 500mA - 560 lm

14° > 36° Zoom Lens 7Z4832. _ _ _

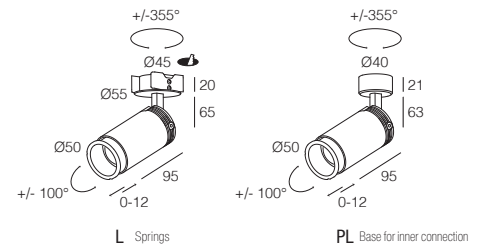


FINISH	CCT	FIXING
● H Black	● U1 2200K CRI > 90	L Springs
○ 7 White	● B2 2400K CRI > 90	PL Base for inner connection
○ W All White	● X 2700K CRI > 90	
	● X1 2700K CRI > 95	
	● 6 3000K	
	● W 3000K CRI > 90	
	● W1 3000K CRI > 95	
	● K 3500K CRI > 90	
	● K1 3500K CRI > 95	
	● D 4000K CRI > 90	



Ariel Contour

500mA 9W
Lumen Output: 3000K CRI > 90 500mA - 510 lm

24° > 35° Zoom Lens 7Z4575. _ _ _

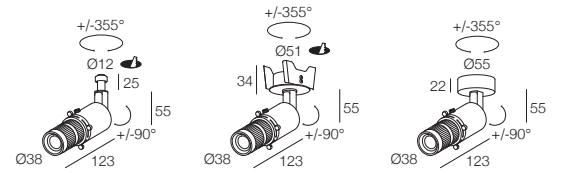

FINISH	CCT	FIXING
● 4 Black	● U1 2200K CRI > 90	G Ring Nut
	● B2 2400K CRI > 90	L Springs
	● X 2700K CRI > 90	PL Base for inner connection
	● X1 2700K CRI > 95	
	● 6 3000K	
	● W 3000K CRI > 90	
	● W1 3000K CRI > 95	
	● K 3500K CRI > 90	
	● K1 3500K CRI > 95	
	● D 4000K CRI > 90	




- IP40
- 230V
-
-
-
-
- 750 g
- 2

Aurora Zoom 1500

220-240Vac 18W
Lumen Output 3000K 220-240Vac - 1100 lm

9° > 40° Zoom Lens 7Z3971._ _



FINISH

- H Black
- 7 White
- W All White

CCT

- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K

Aurora Zoom 1500 DALI

220-240Vac 18W
Lumen Output 3000K 220-240Vac - 1100 lm

9° > 40° Zoom Lens 7Z4351._ _




- IP40
- 230V
-
-
-
-
- 735 g
- 2

Aurora Zoom 1500 F

220-240Vac 18W
Lumen Output 3000K 220-240Vac - 1100 lm

9° > 40° Zoom Lens 7Z4205._ _



FINISH

- H Black
- 7 White
- W All White

CCT

- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K

Aurora Zoom 1500 F DALI

220-240Vac 18W
Lumen Output 3000K 220-240Vac - 1100 lm

9° > 40° Zoom Lens 7Z4206._ _




- IP40
- 230V
-
-
-
-
- 1050 g
- 2

Aurora Zoom 3000

220-240Vac 30W
Lumen Output 3000K 220-240Vac - 1600 lm

8° > 45°
Zoom Lens 7Z3973._ _



FINISH

- H Black
- 7 White
- W All White

CCT

- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K

Aurora Zoom 3000 DALI

220-240Vac 30W
Lumen Output 3000K 220-240Vac - 1600 lm

8° > 45°
Zoom Lens 7Z4352._ _




- IP40
- 230V
-
-
-
-
- 1050 g
- 2

Aurora Zoom 3000 F

220-240Vac 30W
Lumen Output 3000K 220-240Vac - 1600 lm

8° > 45°
Zoom Lens 7Z4207._ _



FINISH

- H Black
- 7 White
- W All White

CCT

- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K

Aurora Zoom 3000 F DALI

220-240Vac 30W
Lumen Output 3000K 220-240Vac - 1600 lm

8° > 45°
Zoom Lens 7Z4208._ _




- IP40
- 400
- 690 g
- Ø52
- 2

Aurora Zoom 1500 mP

400mA 15W
Lumen Output 3000K 400mA - 1100 lm

9° > 40° 7Z4924._ _
Zoom Lens



FINISH

- H Black
- 7 White
- W All White

CCT

- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K




- IP40
- 400
- 700 g
- Ø52
- 2

Aurora Zoom 1500 PL

400mA 15W
Lumen Output 3000K 400mA - 1100 lm

9° > 40° 7Z4923._ _
Zoom Lens



FINISH

- H Black
- 7 White
- W All White

CCT


- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K



Aurora Zoom 3000 mP

700mA 25W
Lumen Output 3000K 700mA - 1600 lm

8° > 45°
Zoom Lens 7Z4012._ _



FINISH

- H Black
- 7 White
- W All White

CCT


- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K



Aurora Zoom 3000 PL

700mA 25W
Lumen Output 3000K 700mA - 1600 lm

8° > 45°
Zoom Lens 7Z3974._ _



FINISH

- H Black
- 7 White
- W All White

CCT

- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- 9 4000K

TRASPARENZE ESSENZIALI: DETTAGLI CHE FANNO LA DIFFERENZA


La Serie Solovetro rappresenta l'equilibrio perfetto tra innovazione tecnologica ed estetica raffinata. Grazie all'esclusiva finitura in vetro, ogni apparecchio si integra armoniosamente con l'architettura circostante, trasformandosi in un autentico elemento di design. Con una vasta gamma di prodotti, la Collezione si conferma l'alleata ideale per progetti che aspirano a coniugare eleganza e funzionalità.

ESSENTIAL TRANSPARENCIES: DETAILS THAT MAKE A DIFFERENCE

The Solovetro Series represents the perfect balance between technological innovation and refined aesthetics. Thanks to the exclusive glass finish, each luminaire harmoniously integrates with the surrounding architecture, becoming a true design element. With a wide range of products, the Collection proves to be the ideal ally for projects that aim to combine elegance and functionality.

Solovetro Series





Gemma 20 IP67 Solovetro

350 / 500mA Lumen Output 3000K CRI > 90	1W 350mA - 60 lm	2W 500mA - 75 lm
15° Lens	7A3681._ _	7A3682._ _
25° Lens	7G3681._ _	7G3682._ _
40° Lens	743681._ _	743682._ _
Frosted Glass	713681._ _	713682._ _

FINISH	CCT
● 4 Black	● U 2200K
● Z Champagne Gold	● X 2700K CRI > 90
● 3 Gray	● W 3000K CRI > 90
	● 9 4000K


Hex louver inclusive

24V Lumen Output 3000K CRI > 90	1,5W 24Vdc - 60 lm	2W 24Vdc - 75 lm
15° Lens	7A4641._ _	7A4642._ _
25° Lens	7G4641._ _	7G4642._ _
40° Lens	744641._ _	744642._ _
Frosted Glass	714641._ _	714642._ _


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

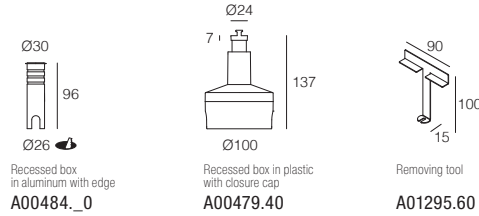

EXAMPLE CODE COMPOSITION



Gemma 35 IP67 Solovetro

350 / 500mA Lumen Output 3000K	1W 350mA - 85 lm	2W 500mA - 115 lm	3W 350mA - 25 lm
10° Lens	733675._ _	733676._ _	
30° Lens	763675._ _	763676._ _	
40° Lens	743675._ _	743676._ _	
Elliptical Lens	773675._ _	773676._ _	
Frosted Glass	713675._ _	713676._ _	713677._ _

FINISH	CCT
● 4 Black	● U 2200K
● Z Champagne Gold	● Y 2700K
● 3 Gray	● 6 3000K
	● 9 4000K


Hex louver inclusive

24V Lumen Output 3000K	1,5W 24Vdc - 85 lm	2W 24Vdc - 115 lm	4W 24Vdc - 25 lm
10° Lens	734643._ _	734644._ _	
30° Lens	764643._ _	764644._ _	
40° Lens	744643._ _	744644._ _	
Elliptical Lens	774643._ _	774644._ _	
Frosted Glass	714643._ _	714644._ _	714645._ _

SUGGESTED DRIVERS (not included)


350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

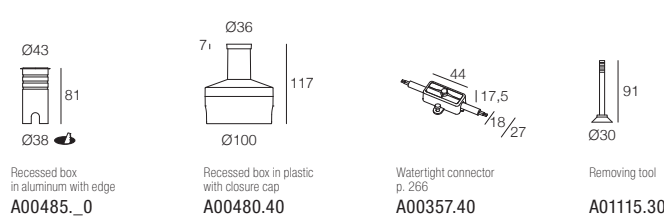

EXAMPLE CODE COMPOSITION





Astro 80 IP67 Solovetro

350 / 500mA Lumen Output 3000K	1W 350mA - 15 lm	2W 500mA - 20 lm	3W 350mA - 200 lm
15° Lens			7A3672._ _
30° Lens			763672._ _
60° Lens			753672._ _
Elliptical Lens			773672._ _
Frosted Glass	713673._ _	713674._ _	

FINISH	CCT
● 4 Black	● U 2200K
● Z Champagne Gold	● Y 2700K
● 3 Gray	● 6 3000K
	● 9 4000K


Hex louver inclusive

24V Lumen Output 3000K	1,5W 24Vdc - 15 lm	2W 24Vdc - 20 lm	4W 24Vdc - 200 lm
15° Lens			7A4646._ _
30° Lens			764646._ _
60° Lens			754646._ _
Elliptical Lens			774646._ _
Frosted Glass	714647._ _	714648._ _	


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES



Recessed box in aluminum with edge
A00487_0




Recessed box in aluminum with closure cap
A00482.30



Removing tool
A01628.30

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Nesis IP67 Solovetro

350 / 500mA Lumen Output 3000K	3W 350mA - 240 lm	6W 500mA - 330 lm	3W RGB 350mA - 165 lm
10° Lens	733544._ _	733545._ _	733544._ 7
30° Lens	763544._ _	763545._ _	763544._ 7
60° Lens	753544._ _	753545._ _	753544._ 7

24V Lumen Output 3000K	4W 24Vdc - 240 lm	6W 24Vdc - 330 lm
10° Lens	734649._ _	734650._ _
30° Lens	764649._ _	764650._ _
60° Lens	754649._ _	754650._ _

FINISH	CCT
● 4 Black	● U 2200K
● Z Champagne Gold	● Y 2700K
● 3 Gray	● 6 3000K
	● 9 4000K
	● 7 RGB

Hex louver inclusive


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292
RGB	CC50-X-350-NL	p. 282


ACCESSORIES



Recessed box in aluminum with edge
A00433_0



Recessed box in plastic with closure cap
A00483.40





Watertight connector p. 266
A00387.40



Removing tool
A01628.30

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Tono i IP67 Solovetro

350 / 500mA Lumen Output 3000K	3W 900mA - 120 lm	6W 500mA - 370 lm
3° Lens	7T4059._ _	
10° Lens		734060._ _
30° Lens		764060._ _
50° Lens		7D4060._ _

FINISH	CCT
● 4 Black	● U 2200K
● Z Champagne Gold	● Y 2700K
● 3 Gray	● 6 3000K
	● W 3000K CRI > 90
	● J 3500K
	● 9 4000K


Hex louver inclusive

24V Lumen Output 3000K	3W 24Vdc - 120 lm	7W 24Vdc - 370 lm
3° Lens	7T4651._ _	
10° Lens		734652._ _
30° Lens		764652._ _
50° Lens		7D4652._ _


SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292


ACCESSORIES




Recessed box in aluminum with edge
A00642_0



Recessed box in aluminum with closure cap
A00643.40




Watertight connector p. 266
A00387.40



Removing tool
A01292.30

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Odino IP67 Solovetro

220-240Vac Lumen Output 3000K	6W 220-240Vac - 120 lm
30° Lens	763867._ _
50° Reflector	7D3867._ _


FINISH	CCT
● 4 Black	● Y 2700K
● Z Champagne Gold	● 6 3000K
● 3 Gray	

Hex louver inclusive


OPTIONAL DIMMER (not included)

D300-D-1CH-NT	p. 295
---------------	--------


ACCESSORIES



Recessed box in aluminum with edge
A00642_0



Recessed box in aluminum with closure cap
A00643.40



Watertight connector p. 266
A01023.40



Removing tool
A01292.30


EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Trium i IP67 Solovetro with D Louver

[1] The wall washer optics cannot be equipped with louver



Trium i IP67 Solovetro

700mA Lumen Output 3000K	7W RGBW 700mA - 570 lm
10° Lens	734756._ 7 _
25° Lens	7G4756._ 7 _
40° Lens	744756._ 7 _
60° Lens	754756._ 7 _
Elliptical Lens	774756._ 7 _
Wall Washer [1]	7W4756._ 7 W

FINISH	CCT	OPTICAL FILTERS
● 4 Black	● 7 RGBW	W Without Filter D Louver F Asy Louver


24V Lumen Output 3000K	7W 24Vdc - 600 lm	15W 24Vdc - 1000 lm
10° Lens	734557._ _ _	734571._ _ _
25° Lens	7G4557._ _ _	7G4571._ _ _
40° Lens	744557._ _ _	744571._ _ _
60° Lens	754557._ _ _	754571._ _ _
Elliptical Lens	774557._ _ _	774571._ _ _
Wall Washer [1]	7W4557._ _ W	

FINISH	CCT	OPTICAL FILTERS
● 4 Black	● U 2200K ● Y 2700K ● 6 3000K ● W 3000K CRI > 90 ● J 3500K ● 9 4000K	W Without Filter D Louver F Asy Louver

SUGGESTED DRIVERS (not included)

RGBW CC50-X-700-NL p. 286
24Vdc CV30-F-24-PI p. 292

ACCESSORIES

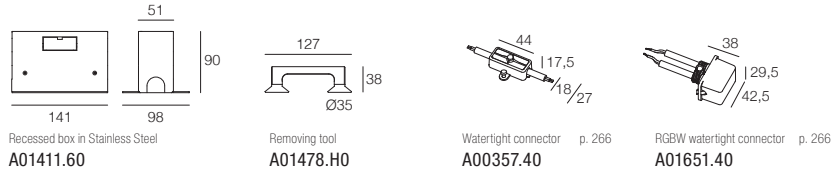


EXAMPLE CODE COMPOSITION



Trium i IP67 Solovetro 230V with D Louver

[1] The wall washer optics cannot be equipped with louver




Trium i IP67 Solovetro 230V

220-240Vac Lumen Output 3000K	8W 220-240Vac - 600 lm
10° Lens	734579._ _ _
25° Lens	7G4579._ _ _
40° Lens	744579._ _ _
60° Lens	754579._ _ _
Elliptical Lens	774579._ _ _
Wall Washer [1]	7W4579._ _ W

FINISH	CCT	OPTICAL FILTERS
● 4 Black	● U 2200K ● Y 2700K ● 6 3000K ● W 3000K CRI > 90 ● J 3500K ● 9 4000K	W Without Filter D Louver F Asy Louver

ACCESSORIES

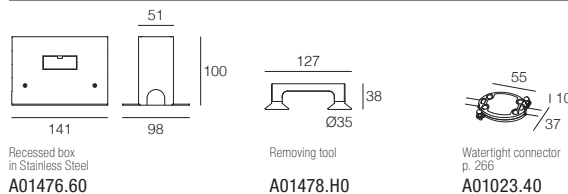


EXAMPLE CODE COMPOSITION





IP67
 WIPS
 500
 24V
 1 m
 420 g
 2
 SD CM
 TM 66



Ariel i IP67 Solovetro

500mA Lumen Output 3000K	9W 500mA - 550 lm
14° Lens [1]	7Q4930._ _ _ _
18° Lens	784930._ _ _ _
24° Lens	7G4930._ _ _ _
33° Lens	7E4930._ _ _ _
52° Lens	754930._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● Z Champagne Gold	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● 3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		


24V Lumen Output 3000K	9,5W 24Vdc - 550 lm
14° Lens [1]	7Q4653._ _ _ _
18° Lens	784653._ _ _ _
24° Lens	7G4653._ _ _ _
33° Lens	7E4653._ _ _ _
52° Lens	754653._ _ _ _

Hex louver not included
 [1] 14° Lens not interchangeable

● Plug&Play System



IP67
 WIPS
 500
 24V
 1 m
 420 g
 P&P
 2
 SD CM
 TM 66



Ariel i IP67 Solovetro Plug&Play

500mA Lumen Output 3000K	9W 500mA - 550 lm
14° Lens	7Q4931._ _ _ _
18° Lens	784931._ _ _ _
24° Lens	7G4931._ _ _ _
33° Lens	7E4931._ _ _ _
52° Lens	754931._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● Z Champagne Gold	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● 3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		

24V Lumen Output 3000K	9,5W 24Vdc - 550 lm
14° Lens	7Q4654._ _ _ _
18° Lens	784654._ _ _ _
24° Lens	7G4654._ _ _ _
33° Lens	7E4654._ _ _ _
52° Lens	754654._ _ _ _

Hex louver not included


SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292


ACCESSORIES




INTERCHANGEABLE ACCESSORIES
p. 260



Recessed box in aluminum with edge
A01415_0



Recessed box in aluminum with closure cap
A01414.40




Watertight connector p. 266
A00387.40



Removing tool
A01292.30


EXAMPLE CODE COMPOSITION





Hex louver not included
 [1] 12° Lens not interchangeable

- IP67
- WIPS
- 350
- 24V
-
-
-
-
- 1 m
- 770 g
- 2
- TM 66



Saturno i IP67 Solovetro

350mA	12W
Lumen Output 3000K	350mA - 920 lm
12° Lens [1]	7Q4932._ _ _ _
18° Lens	784932._ _ _ _
24° Lens	7G4932._ _ _ _
33° Lens	7E4932._ _ _ _
52° Lens	754932._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> 4 Black Z Champagne Gold 3 Gray 	<ul style="list-style-type: none"> U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 6 3000K W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90 	<ul style="list-style-type: none"> 4 Black I Gold Chrome 8 Satin Gold N Satin Nickel 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens


24V	14W
Lumen Output 3000K	24Vdc - 920 lm
12° Lens [1]	7Q4655._ _ _ _
18° Lens	784655._ _ _ _
24° Lens	7G4655._ _ _ _
33° Lens	7E4655._ _ _ _
52° Lens	754655._ _ _ _

● Plug&Play System



Hex louver not included

- IP67
- WIPS
- 350
- 24V
-
-
-
-
- 1 m
- 770 g
- P&P
- 2
- TM 66



Saturno i IP67 Solovetro Plug&Play

350mA	12W
Lumen Output 3000K	350mA - 920 lm
12° Lens [1]	7Q4933._ _ _ _
18° Lens	784933._ _ _ _
24° Lens	7G4933._ _ _ _
33° Lens	7E4933._ _ _ _
52° Lens	754933._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
<ul style="list-style-type: none"> 4 Black Z Champagne Gold 3 Gray 	<ul style="list-style-type: none"> U1 2200K CRI > 90 B2 2400K CRI > 90 X 2700K CRI > 90 6 3000K W 3000K CRI > 90 K 3500K CRI > 90 D 4000K CRI > 90 	<ul style="list-style-type: none"> 4 Black I Gold Chrome 8 Satin Gold N Satin Nickel 1 Shiny Chrome 	<ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens

24V	14W
Lumen Output 3000K	24Vdc - 920 lm
12° Lens	7Q4656._ _ _ _
18° Lens	784656._ _ _ _
24° Lens	7G4656._ _ _ _
33° Lens	7E4656._ _ _ _
52° Lens	754656._ _ _ _


SUGGESTED DRIVERS (not included)

- 350mA CC14-F-350-PI p. 288
- 24Vdc CV30-F-24-PI p. 292


ACCESSORIES




INTERCHANGEABLE ACCESSORIES p. 261



Recessed box in aluminum with edge A01418_0



Recessed box in aluminum with closure cap A01446.40




Watertight connector p. 266 A00387.40




Removing tool A01628.30

EXAMPLE CODE COMPOSITION





IP67
 WIPS
 500 / 900
 24V
 1 m
 130 g
 2



Passo IP67

500 / 900mA Lumen Output 3000K	2W 500mA - 30 lm	3W 900mA - 70 lm
	45° Emission	724001. __
24V Lumen Output 3000K	2W 24Vdc - 30 lm	3W 24Vdc - 70 lm
	45° Emission	724686. __

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
	● 6 3000K
	● W 3000K CRI > 90
	● 9 4000K


SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES



Recessed box
in aluminum
A00853.30




Watertight connector
p. 266
A00357.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



IP67
 WIPS
 500 / 900
 24V
 1 m
 150 g
 Ø42
 2



Passo IP67 m


500 / 900mA Lumen Output 3000K	2W 500mA - 30 lm	3W 900mA - 70 lm
	45° Emission	724003. __
24V Lumen Output 3000K	2W 24Vdc - 30 lm	3W 24Vdc - 70 lm
	45° Emission	724688. __

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
	● 6 3000K
	● W 3000K CRI > 90
	● 9 4000K

SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES



Watertight connector
p. 266
A00357.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



IP67
 WIPS
 350
 24V
 1 m
 115 g
 2

Lui IP67 Solovetro

		1W	2W
350 / 500mA		350mA - 15 lm	500mA - 25 lm
	Lumen Output 3000K		
Lui IP67 Solovetro 01	45° Emission	724585. __	724586. __
Lui IP67 Solovetro 02	45° Emission	724587. __	724588. __
Lui IP67 Solovetro 03	45° Emission	724589. __	724590. __



FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
○ 7 White	● 6 3000K
	● 9 4000K

		1,5W	2W
24V		24Vdc - 15 lm	24Vdc - 25 lm
	Lumen Output 3000K		
Lui IP67 Solovetro 01	45° Emission	724690. __	724691. __
Lui IP67 Solovetro 02	45° Emission	724692. __	724693. __
Lui IP67 Solovetro 03	45° Emission	724694. __	724695. __

SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

76 / Ø33
 A01451.40
 42 x 42 / 80 / Ø38
 A01450.0
 41 / Ø31
 A01457.60
 Ø90 / 79 / Ø50
 A01449.30

 A00832.H0

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



IP67
 WIPS
 350
 24V
 1 m
 115 g
 2

Lei IP67 Solovetro

		1W	2W
350 / 500mA		350mA - 25 lm	500mA - 35 lm
	Lumen Output 3000K		
Lei IP67 Solovetro 01	45° Emission	724591. __	724592. __
Lei IP67 Solovetro 02	45° Emission	724593. __	724594. __
Lei IP67 Solovetro 03	45° Emission	724595. __	724596. __



FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
○ 7 White	● 6 3000K
	● 9 4000K

		1,5W	2W
24V		24Vdc - 25 lm	24Vdc - 35 lm
	Lumen Output 3000K		
Lei IP67 Solovetro 01	45° Emission	724696. __	724697. __
Lei IP67 Solovetro 02	45° Emission	724698. __	724699. __
Lei IP67 Solovetro 03	45° Emission	724700. __	724701. __

SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

76 / Ø33
 A01451.40
 Ø43 / 80 / Ø38
 A01453.0
 145 / 150 / Ø35
 A01565.30
 41 / Ø31
 A01457.60
 Ø90 / 79 / Ø50
 A01452.30

 A00832.H0

EXAMPLE CODE COMPOSITION

123456 CCT FINISH

EFFICIENZA E DESIGN AL SUOLO

Gli incassi DGA offrono suggestive pennellate di luce che, partendo dal pavimento, esaltano magnificamente elementi come colonnati, porticati e alberi dalle chiome maestose. Questi apparecchi ad incasso, realizzati in alluminio di alta qualità e dotati di flangia in acciaio inox AISI 316L, sono particolarmente adatti per ambienti corrosivi, garantendo un'eccezionale durabilità nel tempo. Le loro dimensioni compatte e le ottiche arretrate assicurano un comfort visivo superiore, rendendoli ideali per valorizzare elementi verticali.

EFFICIENCY AND DESIGN AT GROUND LEVEL


The DGA recessed lights offer evocative strokes of light that, starting from the floor, beautifully enhance elements such as columns, porches, and majestic trees. These recessed fixtures, made of high-quality aluminum and featuring a flange in AISI 316L stainless steel, are particularly suitable for corrosive environments, ensuring exceptional durability over time. Their compact dimensions and recessed optics provide superior visual comfort, making them ideal for highlighting vertical elements.

Recessed Lights





IP67
 WIPS
 350
 24V
 1 m
 87 g
 2



Gemma 20 IP67


350 / 500mA	1W	2W
Lumen Output 3000K CRI > 90	350mA - 70 lm	500mA - 95 lm
15° Lens	7A4110. __ _	7A4111. __ _
30° Lens	764110. __ _	764111. __ _
40° Lens	744110. __ _	744111. __ _
Frosted Glass	714110. __ _	714111. __ _
Transparent Glass	724110. __ _	724111. __ _
Elliptical Lens	774110. __ _	774111. __ _

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● X 2700K CRI > 90
● 6 Stainless Steel AISI 316L	● W 3000K CRI > 90
	● 9 4000K

24V	1,5W	2W
Lumen Output 3000K CRI > 90	24Vdc - 70 lm	24Vdc - 95 lm
15° Lens	7A4657. __ _	7A4658. __ _
30° Lens	764657. __ _	764658. __ _
40° Lens	744657. __ _	744658. __ _
Frosted Glass	714657. __ _	714658. __ _
Transparent Glass	724657. __ _	724658. __ _
Elliptical Lens	774657. __ _	774658. __ _



IP67
 WIPS
 350
 24V
 1 m
 87 g
 Ø20
 2



Gemma 20 IP67 m

350 / 500mA	1W	2W
Lumen Output 3000K CRI > 90	350mA - 70 lm	500mA - 95 lm
15° Lens	7A4110. __ _ L	7A4111. __ _ L
30° Lens	764110. __ _ L	764111. __ _ L
40° Lens	744110. __ _ L	744111. __ _ L
Frosted Glass	714110. __ _ L	714111. __ _ L
Transparent Glass	724110. __ _ L	724111. __ _ L
Elliptical Lens	774110. __ _ L	774111. __ _ L

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● X 2700K CRI > 90
● 7 White	● W 3000K CRI > 90
● 6 Stainless Steel AISI 316L	● 9 4000K


24V	1,5W	2W
Lumen Output 3000K CRI > 90	24Vdc - 70 lm	24Vdc - 95 lm
15° Lens	7A4657. __ _ L	7A4658. __ _ L
30° Lens	764657. __ _ L	764658. __ _ L
40° Lens	744657. __ _ L	744658. __ _ L
Frosted Glass	714657. __ _ L	714658. __ _ L
Transparent Glass	724657. __ _ L	724658. __ _ L
Elliptical Lens	774657. __ _ L	774658. __ _ L

SUGGESTED DRIVERS (not included)


350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

Recessed boxes for Gemma 20 IP67 (not suitable for springs version)





Aluminum recessed box
A00285.30



Plastic recessed box
A00326.40

EXAMPLE CODE COMPOSITION






Gemma 35 IP67

350 / 500mA Lumen Output 3000K	1W 350mA - 120 lm	2W 500mA - 170 lm	3W 350mA - 100 lm
10° Lens	730917. __	730918. __	
30° Lens	760917. __	760918. __	
40° Lens	740917. __	740918. __	
Frosted Glass	710917. __	710918. __	710919. __
Transparent Glass	720917. __	720918. __	720919. __
Elliptical Lens	770917. __	770918. __	

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● 9 4000K

24V Lumen Output 3000K	1,5W 24Vdc - 120 lm	2W 24Vdc - 170 lm	4W 24Vdc - 100 lm
10° Lens	734659. __	734660. __	
30° Lens	764659. __	764660. __	
40° Lens	744659. __	744660. __	
Frosted Glass	714659. __	714660. __	714661. __
Transparent Glass	724659. __	724660. __	724661. __
Elliptical Lens	774659. __	774660. __	



Gemma 35 IP67 m

350 / 500mA Lumen Output 3000K	1W 350mA - 120 lm	2W 500mA - 170 lm	3W 350mA - 100 lm
10° Lens	730917. __ L	730918. __ L	
30° Lens	760917. __ L	760918. __ L	
40° Lens	740917. __ L	740918. __ L	
Frosted Glass	710917. __ L	710918. __ L	710919. __ L
Transparent Glass	720917. __ L	720918. __ L	720919. __ L
Elliptical Lens	770917. __ L	770918. __ L	

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 7 White	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K


24V Lumen Output 3000K	1,5W 24Vdc - 120 lm	2W 24Vdc - 170 lm	4W 24Vdc - 100 lm
10° Lens	734659. __ L	734660. __ L	
30° Lens	764659. __ L	764660. __ L	
40° Lens	744659. __ L	744660. __ L	
Frosted Glass	714659. __ L	714660. __ L	714661. __ L
Transparent Glass	724659. __ L	724660. __ L	724661. __ L
Elliptical Lens	774659. __ L	774660. __ L	

SUGGESTED DRIVERS (not included)


350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES


Recessed boxes for Gemma 35 IP67 (not suitable for springs version)



Aluminum recessed box
A00161.30



Plastic recessed box
A00249.40



Watertight connector p. 266
A00357.40


EXAMPLE CODE COMPOSITION



123456



IP67
 WIPS
 350
 24V
 1 m
 110 g
 2



Gemma 35 IP67 GS

350 / 500mA Lumen Output: 3000K	1W 350mA - 40 lm	2W 500mA - 70 lm
	30° Asymmetric	764107._ _
24V Lumen Output: 3000K	1,5W 24Vdc - 40 lm	2W 24Vdc - 70 lm
	30° Asymmetric	764662._ _

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● 9 4000K

SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

Ø33
 100
 Ø40
 Aluminum recessed box
A00161.30


Ø33
 110
 Ø100
 Plastic recessed box
A00249.40

44
 117,5
 18/27
 Watertight connector p. 266
A00357.40

EXAMPLE CODE COMPOSITION



IP67
 WIPS
 350
 24V
 1 m
 217 g
 2



Arco 60 i

350 / 700mA Lumen Output: 3000K	3W 350mA - 310 lm	3W RGBW 700mA - 155 lm	
	15° Lens	7A4063._ _	
	30° Lens	764063._ _	764928._ 7
	60° Lens	754063._ _	
	Frosted Glass	714063._ _	714928._ 7
	Elliptical Lens	774063._ _	

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● 9 4000K
	● 7 RGBW

RGBW available on some products only

24V Lumen Output: 3000K	3W 24Vdc - 310 lm	
	15° Lens	7A4064._ _
	30° Lens	764064._ _
	60° Lens	754064._ _
	Frosted Glass	714064._ _
	Elliptical Lens	774064._ _

SUGGESTED DRIVERS (not included)

RGBW	CC50-X-700-NL	p. 286
350mA	CC14-F-350-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES


Ø45
 100
 Ø50
 Aluminum recessed box
A00129.30

Ø45
 110
 Ø100
 Plastic recessed box
A00250.40

37
 122
 36,5
 Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION





Astro 80

350 / 500mA	1W	2W	3W
Lumen Output 3000K	350mA - 60 lm	500mA - 90 lm	350mA - 330 lm
15° Lens			7A0858._ _
30° Lens			760858._ _
60° Lens			750858._ _
Frosted Glass	710857._ _	710796._ _	
Elliptical Lens			770858._ _

FINISH	CCT
4 Black	U 2200K
3 Gray	Y 2700K
6 Stainless Steel AISI 316L	6 3000K
	9 4000K

24V	1,5W	2W	4W
Lumen Output 3000K	24Vdc - 60 lm	24Vdc - 90 lm	24Vdc - 330 lm
15° Lens			7A4666._ _
30° Lens			764666._ _
60° Lens			754666._ _
Frosted Glass	714664._ _	714665._ _	
Elliptical Lens			774666._ _

SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES




Aluminum recessed box
A00658.30

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



IP67
 WIPS
 Driverless
 1 m
 215 g



Odino 6 i

220-240Vac Lumen Output 3000K	6W 220-240Vac - 270 lm
30° Lens	763739._ _
50° Reflector	7D3739._ _

FINISH	CCT
● 4 Black	● Y 2700K
● B Dark Bronze	● 6 3000K
● 3 Gray	


OPTIONAL DIMMER (not included)

ACCESSORIES


EXAMPLE CODE COMPOSITION

D300-D-1CH-NT p. 295

123456 CCT FINISH




Aluminum recessed box
A00569.30



Watertight connector p. 266
A01023.40



IP67
 WIPS
 Driverless
 1 m
 530 g



Odino 15 i

220-240Vac Lumen Output 3000K	15W 220-240Vac - 750 lm
20° Lens	784052._ _
30° Lens	764052._ _

FINISH	CCT
● 4 Black	● Y 2700K
● B Dark Bronze	● 6 3000K
● 3 Gray	


OPTIONAL DIMMER (not included)

ACCESSORIES


EXAMPLE CODE COMPOSITION

D300-D-1CH-NT p. 295



123456 CCT FINISH



Aluminum recessed box
A00862.30



Watertight connector p. 266
A01023.40




Nesis H65

350 / 500mA Lumen Output 3000K	3W 350mA - 370 lm	6W 500mA - 500 lm	3W RGB 350mA - 105 lm
10° Lens	733052._ _	733053._ _	733052._ 7
30° Lens	763052._ _	763053._ _	763052._ 7
60° Lens	753052._ _	753053._ _	753052._ 7

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● 9 4000K
	● 7 RGB

24V Lumen Output 3000K	4W 24Vdc - 370 lm	6W 24Vdc - 500 lm
10° Lens	734676._ _	734677._ _
30° Lens	764676._ _	764677._ _
60° Lens	754676._ _	754677._ _



Nesis H65 m

350 / 500mA Lumen Output 3000K	3W 350mA - 370 lm	6W 500mA - 500 lm	3W RGB 350mA - 105 lm
10° Lens	734882._ _	734883._ _	734884._ 7
30° Lens	764882._ _	764883._ _	764884._ 7
60° Lens	754882._ _	754883._ _	754884._ 7

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● 9 4000K
	● 7 RGB


24V Lumen Output 3000K	4W 24Vdc - 370 lm	6W 24Vdc - 500 lm
10° Lens	734885._ _	734886._ _
30° Lens	764885._ _	764886._ _
60° Lens	754885._ _	754886._ _

SUGGESTED DRIVERS (not included)


RGB	CC50-X-350-NL	p. 282
350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES


Recessed boxes for Nesis H65 (not suitable for springs version)



Plastic recessed box
A00290.40




Plastic recessed box
A00251.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Tono i IP67

500 / 900mA Lumen Output 3000K	3W 900mA - 200 lm	6W 500mA - 450 lm
3° Lens	7T3630._ _	
10° Lens		733629._ _
30° Lens		763629._ _
50° Lens		7D3629._ _


FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● W 3000K CRI > 90
	● J 3500K
	● 9 4000K

24V Lumen Output 3000K	3W 24Vdc - 200 lm	7W 24Vdc - 450 lm
3° Lens	7T4667._ _	
10° Lens		734668._ _
30° Lens		764668._ _
50° Lens		7D4668._ _

Tono i IP67 with hex louver

500 / 900mA Lumen Output 3000K	3W 900mA - 140 lm	6W 500mA - 330 lm
3° Lens	7T3632._ _	
10° Lens		733631._ _
30° Lens		763631._ _
50° Lens		7D3631._ _

24V Lumen Output 3000K	3W 24Vdc - 140 lm	7W 24Vdc - 330 lm
3° Lens	7T4669._ _	
10° Lens		734670._ _
30° Lens		764670._ _
50° Lens		7D4670._ _



Tono i IP67 GS

500mA Lumen Output 3000K	6W 500mA - 140 lm
30° Asymmetric	764094._ _


24V Lumen Output 3000K	7W 24Vdc - 140 lm
30° Asymmetric	764675._ _

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● W 3000K CRI > 90
	● J 3500K
	● 9 4000K


SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES




Aluminum recessed box
A00489.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Tono im IP67

500 / 900mA Lumen Output 3000K	3W 900mA - 200 lm	6W 500mA - 450 lm
3° Lens	7T4053._ _	
10° Lens		734054._ _
30° Lens		764054._ _
50° Lens		7D4054._ _

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 7 White	● 6 3000K
● 6 Stainless Steel AISI 316L	● W 3000K CRI > 90
	● J 3500K
	● 9 4000K

24V Lumen Output 3000K	3W 24Vdc - 200 lm	7W 24Vdc - 450 lm
3° Lens	7T4671._ _	
10° Lens		734672._ _
30° Lens		764672._ _
50° Lens		7D4672._ _

Tono im IP67 with hex louver


500 / 900mA Lumen Output 3000K	3W 900mA - 140 lm	6W 500mA - 330 lm
3° Lens	7T4056._ _	
10° Lens		734057._ _
30° Lens		764057._ _
50° Lens		7D4057._ _

24V Lumen Output 3000K	3W 24Vdc - 140 lm	7W 24Vdc - 330 lm
3° Lens	7T4673._ _	
10° Lens		734674._ _
30° Lens		764674._ _
50° Lens		7D4674._ _

SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES




Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



- IP67
- WIPS
- 500
- 24V
- 1 m
- 400 g
- 2
- TM 66



Ariel i IP67

500mA	9W
Lumen Output 3000K	500mA - 750 lm
14° Lens [1]	7Q4549. _ _ _ _
18° Lens	784549. _ _ _ _
24° Lens	7G4549. _ _ _ _
33° Lens	7E4549. _ _ _ _
52° Lens	754549. _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● 3 Gray	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● 6 Stainless Steel AISI 316L	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		


24V	9,5W
Lumen Output 3000K	24Vdc - 750 lm
14° Lens [1]	7Q4678. _ _ _ _
18° Lens	784678. _ _ _ _
24° Lens	7G4678. _ _ _ _
33° Lens	7E4678. _ _ _ _
52° Lens	754678. _ _ _ _

[1] 14° Lens not interchangeable

● Plug&Play System



- IP67
- WIPS
- 500
- 24V
- 1 m
- 400 g
- P&P
- 2
- TM 66



Ariel i IP67 Plug&Play

500mA	9W
Lumen Output 3000K	500mA - 750 lm
14° Lens	7Q4550. _ _ _ _
18° Lens	784550. _ _ _ _
24° Lens	7G4550. _ _ _ _
33° Lens	7E4550. _ _ _ _
52° Lens	754550. _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● 3 Gray	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● 6 Stainless Steel AISI 316L	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		

24V	9,5W
Lumen Output 3000K	24Vdc - 750 lm
14° Lens	7Q4679. _ _ _ _
18° Lens	784679. _ _ _ _
24° Lens	7G4679. _ _ _ _
33° Lens	7E4679. _ _ _ _
52° Lens	754679. _ _ _ _


SUGGESTED DRIVERS (not included)

- 500mA CC14-F-500-PI p. 288
- 24Vdc CV30-F-24-PI p. 292


ACCESSORIES



INTERCHANGEABLE ACCESSORIES p. 260





Aluminum recessed box A01416.40



Watertight connector p. 266 A00387.40

EXAMPLE CODE COMPOSITION





Ariel i IP67 Wall Washer

500mA **9W**
Lumen Output 3000K 500mA - 750 lm
Wall Washer **7W4887._ _**

24V **9,5W**
Lumen Output 3000K 24Vdc - 750 lm
Wall Washer **7W4888._ _**

FINISH

- 4 Black
- 3 Gray
- 6 Stainless Steel AISI 316L


CCT

- U1 2200K CRI > 90
- B2 2400K CRI > 90
- X 2700K CRI > 90
- 6 3000K
- W 3000K CRI > 90
- K 3500K CRI > 90
- D 4000K CRI > 90


SUGGESTED DRIVERS (not included)

500mA **CC14-F-500-PI** p. 288
24Vdc **CV30-F-24-PI** p. 292

ACCESSORIES





Aluminum recessed box
A01416.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION





Saturno i IP67


350mA Lumen Output 3000K	12W 350mA - 1200 lm
12° Lens [1]	7Q4553._ _ _ _
18° Lens	784553._ _ _ _
24° Lens	7G4553._ _ _ _
33° Lens	7E4553._ _ _ _
52° Lens	754553._ _ _ _

24V Lumen Output 3000K	14W 24Vdc - 1200 lm
12° Lens [1]	7Q4680._ _ _ _
18° Lens	784680._ _ _ _
24° Lens	7G4680._ _ _ _
33° Lens	7E4680._ _ _ _
52° Lens	754680._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● 3 Gray	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● 6 Stainless Steel AISI 316L	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		

[1] 12° Lens not interchangeable

● Plug&Play System



Saturno i IP67 Plug&Play

350mA Lumen Output 3000K	12W 350mA - 1200 lm
12° Lens	7Q4554._ _ _ _
18° Lens	784554._ _ _ _
24° Lens	7G4554._ _ _ _
33° Lens	7E4554._ _ _ _
52° Lens	754554._ _ _ _

24V Lumen Output 3000K	14W 24Vdc - 1200 lm
12° Lens	7Q4681._ _ _ _
18° Lens	784681._ _ _ _
24° Lens	7G4681._ _ _ _
33° Lens	7E4681._ _ _ _
52° Lens	754681._ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● 3 Gray	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● 6 Stainless Steel AISI 316L	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
	● 6 3000K	● N Satin Nickel	P Prismatic Filter
	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens
	● K 3500K CRI > 90		
	● D 4000K CRI > 90		


SUGGESTED DRIVERS (not included)

350mA CC14-F-350-PI p. 288
24Vdc CV30-F-24-PI p. 292


ACCESSORIES



INTERCHANGEABLE ACCESSORIES p. 261





Aluminum recessed box A01417.40



Watertight connector p. 266 A00387.40

EXAMPLE CODE COMPOSITION





Saturno i IP67 Wall Washer


350mA	12W
	Lumen Output 3000K 350mA - 1200 lm
Wall Washer	7W4891._ _
24V	14W
	Lumen Output 3000K 24Vdc - 1200 lm
Wall Washer	7W4892._ _

FINISH	CCT
● 4 Black	● U1 2200K CRI > 90
● 3 Gray	● B2 2400K CRI > 90
● 6 Stainless Steel AISI 316L	● X 2700K CRI > 90
	● 6 3000K
	● W 3000K CRI > 90
	● K 3500K CRI > 90
	● D 4000K CRI > 90


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES





Aluminum recessed box
A01417.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION





Giove 3S R

350mA Lumen Output 3000K	3W 350mA - 300 lm
15° Lens	7A3170._ _
30° Lens	763170._ _
60° Lens	753170._ _
Frosted Glass	713170._ _
Elliptical Lens	773170._ _

FINISH	CCT
4 Black	U 2200K
3 Gray	Y 2700K
6 Stainless Steel AISI 316L	6 3000K
	9 4000K

24V Lumen Output 3000K	3W 24Vdc - 300 lm
15° Lens	7A3171._ _
30° Lens	763171._ _
60° Lens	753171._ _
Frosted Glass	713171._ _
Elliptical Lens	773171._ _

Giove 3S R with hex louver


350mA Lumen Output 3000K	3W 350mA - 180 lm
15° Lens	7A3560._ _
30° Lens	763560._ _
60° Lens	753560._ _
Frosted Glass	713560._ _
Elliptical Lens	773560._ _

24V Lumen Output 3000K	3W 24Vdc - 180 lm
15° Lens	7A3561._ _
30° Lens	763561._ _
60° Lens	753561._ _
Frosted Glass	713561._ _
Elliptical Lens	773561._ _


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES





Plastic recessed box
A00130.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION





Giove 7S R

350mA Lumen Output 3000K	7W 350mA - 570 lm
10° Lens	733172._ _
20° Lens	783172._ _
30° Lens	763172._ _
Frosted Glass	713172._ _

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
● 6 Stainless Steel AISI 316L	● 6 3000K
	● 9 4000K

24V Lumen Output 3000K	7W 24Vdc - 570 lm
10° Lens	733173._ _
20° Lens	783173._ _
30° Lens	763173._ _
Frosted Glass	713173._ _

Giove 7S R with hex louver


350mA Lumen Output 3000K	7W 350mA - 340 lm
10° Lens	733562._ _
20° Lens	783562._ _
30° Lens	763562._ _
Frosted Glass	713562._ _

24V Lumen Output 3000K	7W 24Vdc - 340 lm
10° Lens	733563._ _
20° Lens	783563._ _
30° Lens	763563._ _
Frosted Glass	713563._ _


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES




Plastic recessed box
A00333.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION





Tono iR IP67

500 / 900mA Lumen Output 3000K	3W 900mA - 200 lm	6W 500mA - 450 lm
3° Lens	7T3684._ _	
10° Lens		733683._ _
30° Lens		763683._ _
50° Lens		7D3683._ _

FINISH

- 4 Black
- 3 Gray
- 6 Stainless Steel
AISI 316L

CCT

- U 2200K
- Y 2700K
- 6 3000K
- W 3000K CRI > 90
- J 3500K
- 9 4000K

24V Lumen Output 3000K	3W 24Vdc - 200 lm	7W 24Vdc - 450 lm
3° Lens	7T4682._ _	
10° Lens		734683._ _
30° Lens		764683._ _
50° Lens		7D4683._ _

Tono iR IP67 with hex louver

500 / 900mA Lumen Output 3000K	3W 900mA - 140 lm	6W 500mA - 330 lm
3° Lens	7T3686._ _	
10° Lens		733685._ _
30° Lens		763685._ _
50° Lens		7D3685._ _

24V Lumen Output 3000K	3W 24Vdc - 140 lm	7W 24Vdc - 330 lm
3° Lens	7T4684._ _	
10° Lens		734685._ _
30° Lens		764685._ _
50° Lens		7D4685._ _

SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

Aluminum recessed box
A00204.30

Plastic recessed box
A00276.40


Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION





Trium i IP67 with F Asy Louver



Trium i IP67

700mA	7W RGBW
Lumen Output 3000K	700mA - 570 lm
10° Lens	734757._ 7 _
25° Lens	7G4757._ 7 _
40° Lens	744757._ 7 _
60° Lens	754757._ 7 _
Elliptical Lens	774757._ 7 _
Wall Washer [1]	7W4757._ 7W

FINISH	CCT	OPTICAL FILTERS
● 6S Brushed Stainless AISI 316L	● 7 RGBW	W Without Filter D Louver F Asy Louver

[1] The wall washer optics cannot be equipped with louver


24V	7W	15W
Lumen Output 3000K	24Vdc - 600 lm	24Vdc - 1000 lm
10° Lens	734556._ _ _	734570._ _ _
25° Lens	7G4556._ _ _	7G4570._ _ _
40° Lens	744556._ _ _	744570._ _ _
60° Lens	754556._ _ _	754570._ _ _
Elliptical Lens	774556._ _ _	774570._ _ _
Wall Washer [1]	7W4556._ _ W	

FINISH	CCT	OPTICAL FILTERS
● 6S Brushed Stainless AISI 316L	● U 2200K ● Y 2700K ● 6 3000K ● W 3000K CRI > 90 ● J 3500K ● 9 4000K	W Without Filter D Louver F Asy Louver

SUGGESTED DRIVERS (not included)

RGBW CC50-X-700-NL p. 286
24Vdc CV30-F-24-PI p. 292


ACCESSORIES

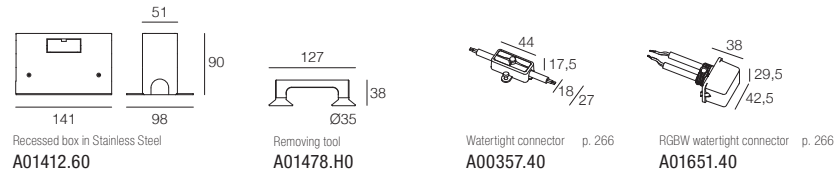

EXAMPLE CODE COMPOSITION



Trium i IP67 230V with F Asy Louver




Trium i IP67 230V

220-240Vac	8W
Lumen Output 3000K	220-240Vac - 600 lm
10° Lens	734576._ _ _
25° Lens	7G4576._ _ _
40° Lens	744576._ _ _
60° Lens	754576._ _ _
Elliptical Lens	774576._ _ _
Wall Washer [1]	7W4576._ _ W

FINISH	CCT	OPTICAL FILTERS
● 6S Brushed Stainless AISI 316L	● U 2200K ● Y 2700K ● 6 3000K ● W 3000K CRI > 90 ● J 3500K ● 9 4000K	W Without Filter D Louver F Asy Louver

[1] The wall washer optics cannot be equipped with louver

ACCESSORIES

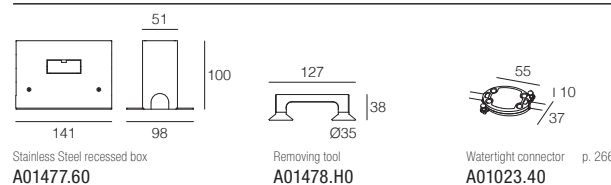

EXAMPLE CODE COMPOSITION



Surface Lighting

ILLUMINAZIONE, DESIGN, INNOVAZIONE

La collezione Surface Lighting rappresenta un equilibrio straordinario tra estetica raffinata e soluzioni tecnologiche all'avanguardia. Progettati per un'installazione versatile a soffitto o a parete, questi apparecchi non si limitano a illuminare, diventano veri e propri elementi d'arredo, protagonisti indiscussi di ogni ambiente.



Con un design che spazia da linee essenziali a forme più elaborate, la gamma Surface Lighting si integra con grazia in contesti residenziali e strutture ricettive. Ogni prodotto è pensato per offrire soluzioni che uniscono funzionalità d'avanguardia a un'attenzione meticolosa ai dettagli, garantendo un'esperienza visiva e sensoriale unica. La versatilità di queste creazioni le rende ideali per progetti di design contemporaneo, dove l'illuminazione svolge un ruolo fondamentale nel definire l'atmosfera e il carattere degli ambienti.

LIGHTING, DESIGN, INNOVATION

The Surface Lighting collection showcases an exceptional harmony between refined aesthetics and cutting-edge technology. Designed for versatile installation on both ceilings and walls, these luminaires do more than simply enlighten, they serve as striking decorative elements, becoming the standout features of any environment. With a design spectrum that ranges from minimalist lines to intricate shapes, the Surface Lighting range seamlessly integrates into both residential and commercial settings. Each product is thoughtfully crafted to provide solutions that blend advanced functionality with meticulous attention to detail, ensuring a unique visual and sensory experience. The versatility of these creations makes them ideal for contemporary design projects, where lighting plays a crucial role in shaping the atmosphere and character of spaces.





Pois Series design by Valerio Sommella & Anonima Luci



Pois 70 IP67

24V
Lumen Output 3000K 24Vdc - 150 lm
Opal Glass 7P3996._ _



- | FINISH | CCT |
|----------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● MF Moka | ● 6 3000K |
| ● 4A Anthracite Gray | ● W 3000K CRI > 90 |
| ● K Corten | ● 9 4000K |
| ● B6 Intense Bronze | |
| ● 4Q Agate Gray | |
| ○ 7 White | |



Pois 100 IP67

24V
Lumen Output 3000K 24Vdc - 300 lm
Opal Glass 7P3997._ _

- | FINISH | CCT |
|----------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● MF Moka | ● 6 3000K |
| ● 4A Anthracite Gray | ● W 3000K CRI > 90 |
| ● K Corten | ● 9 4000K |
| ● B6 Intense Bronze | |
| ● 4Q Agate Gray | |
| ○ 7 White | |




Pois 150 IP67

24V
Lumen Output 3000K 24Vdc - 700 lm
Opal Glass 7P3998._ _

- | FINISH | CCT |
|----------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● MF Moka | ● 6 3000K |
| ● 4A Anthracite Gray | ● W 3000K CRI > 90 |
| ● K Corten | ● 9 4000K |
| ● B6 Intense Bronze | |
| ● 4Q Agate Gray | |
| ○ 7 White | |



IP67
 WIPS
 350
 500
 24V
 230V
 322 g
 2



Eco IP67 single light emission

350 / 500mA Lumen Output 3000K	1W 350mA - 120 lm	2W 500mA - 160 lm
10° Lens	734216. __	734217. __
30° Lens	764216. __	764217. __
40° Lens	744216. __	744217. __


24V Lumen Output 3000K	1W 24Vdc - 120 lm	2W 500mA - 160 lm
10° Lens	734218. __	734219. __
30° Lens	764218. __	764219. __
40° Lens	744218. __	744219. __

220-240Vac Lumen Output 3000K	1W 220-240Vac - 120 lm	2W 220-240Vac - 160 lm
10° Lens	734220. __	734221. __
30° Lens	764220. __	764221. __
40° Lens	744220. __	744221. __

FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● E Massive Brass	● 6 3000K
● 3 Gray	● 9 4000K



IP67
 WIPS
 350
 500
 24V
 230V
 423 g
 2



Eco IP67 double light emission

350 / 500mA Lumen Output 3000K	1W x 2 350mA - 120 lm x 2	2W x 2 500mA - 160 lm x 2
10° Lens	734222. __	734223. __
30° Lens	764222. __	764223. __
40° Lens	744222. __	744223. __

24V Lumen Output 3000K	1W x 2 24Vdc - 120 lm x 2	2W x 2 500mA - 160 lm x 2
10° Lens	734224. __	734225. __
30° Lens	764224. __	764225. __
40° Lens	744224. __	744225. __

220-240Vac Lumen Output 3000K	1W x 2 220-240Vac - 120 lm x 2	2W x 2 220-240Vac - 160 lm x 2
10° Lens	734226. __	734228. __
30° Lens	764226. __	764228. __
40° Lens	744226. __	744228. __

FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● E Massive Brass	● 6 3000K
● 3 Gray	● 9 4000K


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

EXAMPLE CODE COMPOSITION




Kumini Series design by Valerio Sommella & Anonima Luci



Kumini IP67 single light emission

220-240Vac Lumen Output 3000K	3W 220-240Vac - 200 lm
15° Lens	7A4783. __
30° Lens	764783. __
60° Lens	754783. __

FINISH	CCT
● 4 Black	● U 2200K
● 4A Anthracite Gray	● Y 2700K
● MS Bright Brown	● W 3000K CRI > 90
● B6 Intense Bronze	● 9 4000K
● 3 Gray	
○ 7 White	




Kumini IP67 double light emission

220-240Vac Lumen Output 3000K	3W x 2 220-240Vac - 200 lm x 2
15° Lens	7A4784. __
30° Lens	764784. __
60° Lens	754784. __

FINISH	CCT
● 4 Black	● U 2200K
● 4A Anthracite Gray	● Y 2700K
● MS Bright Brown	● W 3000K CRI > 90
● B6 Intense Bronze	● 9 4000K
● 3 Gray	
○ 7 White	

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



Kumi IP67 single light emission

220-240Vac Lumen Output 3000K	6W 220-240Vac - 350 lm
10° Lens	733969. __
30° Lens	763969. __

FINISH	CCT
● 4 Black	● U 2200K
● 4A Anthracite Gray	● Y 2700K
● MS Bright Brown	● 6 3000K
● B6 Intense Bronze	● W 3000K CRI > 90
● 3 Gray	● J 3500K
○ 7 White	● 9 4000K




Kumi IP67 double light emission

220-240Vac Lumen Output 3000K	6W x 2 220-240Vac - 350 lm x 2
10° Lens	733970. __
30° Lens	763970. __

FINISH	CCT
● 4 Black	● U 2200K
● 4A Anthracite Gray	● Y 2700K
● MS Bright Brown	● 6 3000K
● B6 Intense Bronze	● W 3000K CRI > 90
● 3 Gray	● J 3500K
○ 7 White	● 9 4000K


Kumax Series design by Valerio Sommella & Anonima Luci



Kumax IP67 single light emission

220-240Vac Lumen Output 3000K	14W 220-240Vac - 1250 lm
20° Lens	784639._ _
30° Lens	764639._ _
60° Lens	754639._ _

FINISH	CCT
● 4 Black	● U1 2200K CRI > 90
● 4A Anthracite Gray	● B2 2400K CRI > 90
● MS Bright Brown	● X 2700K CRI > 90
● B6 Intense Bronze	● 6 3000K
● 3 Gray	● W 3000K CRI > 90
○ 7 White	● K 3500K CRI > 90
	● D 4000K CRI > 90



Kumax IP67 double light emission

220-240Vac Lumen Output 3000K	14W x 2 220-240Vac - 1250 lm x 2
20° Lens	784640._ _
30° Lens	764640._ _
60° Lens	754640._ _

FINISH	CCT
● 4 Black	● U1 2200K CRI > 90
● 4A Anthracite Gray	● B2 2400K CRI > 90
● MS Bright Brown	● X 2700K CRI > 90
● B6 Intense Bronze	● 6 3000K
● 3 Gray	● W 3000K CRI > 90
○ 7 White	● K 3500K CRI > 90
	● D 4000K CRI > 90

EXAMPLE CODE COMPOSITION

123456 CCT FINISH

PERCORSI DI DESIGN

Gli Steplight DGA rappresentano una soluzione per l'illuminazione delle aree di passaggio e sono progettati per trasformare ogni percorso in un'esperienza visiva. Grazie a un'emissione luminosa che spazia da contorni netti a sfumature più delicate, questi apparecchi creano atmosfere avvolgenti. La loro versatilità permette di adattare l'illuminazione alle diverse esigenze ambientali, contribuendo a ricreare spazi confortevoli.

DESIGN PATHS

The Steplight DGA offers an innovative lighting solution for passage areas, transforming every pathway into a visual experience. With light emissions that range from sharp outlines to softer hues, these products create immersive atmospheres. Their versatility enables the adaptation of lighting to meet various environmental needs, helping to create inviting and comfortable spaces.

Step Lights







- IP67
- WIPS
- 350
500
- 24V
- 1 m
- 120 g
- 2

Lui IP67


	350 / 500mA Lumen Output: 3000K	1W 350mA - 15 lm	2W 500mA - 25 lm
Lui IP67 01	45° Emission	724864. __	724865. __
Lui IP67 02	45° Emission	724866. __	724867. __
Lui IP67 03	45° Emission	724868. __	724869. __



Lui IP67 01



Lui IP67 02



Lui IP67 03

FINISH

- 4 Black
- 3 Gray
- 7 White
- 6 Stainless Steel
AISI 316L

CCT

- U 2200K
- Y 2700K
- 6 3000K
- 9 4000K

	24V Lumen Output: 3000K	1,5W 24Vdc - 15 lm	2W 24Vdc - 25 lm
Lui IP67 01	45° Emission	724702. __	724703. __
Lui IP67 02	45° Emission	724704. __	724705. __
Lui IP67 03	45° Emission	724706. __	724707. __


SUGGESTED DRIVERS (not included)

- 350mA **CC14-F-350-PI** p. 288
- 500mA **CC14-F-500-PI** p. 288
- 24Vdc **CV30-F-24-PI** p. 292

ACCESSORIES




Recessed box
in aluminum
A01451.40



Recessed box
in aluminum with edge
A01450_0



Spring mounting
support
A01457.60



Frame for trimless
installation
A01449.30



Hole saw for trimless
installation
A00832.H0

EXAMPLE CODE COMPOSITION


123456. CCT FINISH




- IP67
- WIPS
- 350
500
- 24V
- 1 m
- 120 g
- 2

Lei IP67


	350 / 500mA Lumen Output: 3000K	1W 350mA - 20 lm	2W 500mA - 25 lm
Lei IP67 01	45° Emission	724870. __	724871. __
Lei IP67 02	45° Emission	724872. __	724873. __
Lei IP67 03	45° Emission	724874. __	724875. __



Lei IP67 01



Lei IP67 02



Lei IP67 03

FINISH

- 4 Black
- 3 Gray
- 7 White
- 6 Stainless Steel
AISI 316L

CCT

- U 2200K
- Y 2700K
- 6 3000K
- 9 4000K

	24V Lumen Output: 3000K	1,5W 24Vdc - 20 lm	2W 24Vdc - 25 lm
Lei IP67 01	45° Emission	724708. __	724709. __
Lei IP67 02	45° Emission	724710. __	724711. __
Lei IP67 03	45° Emission	724712. __	724713. __


SUGGESTED DRIVERS (not included)

- 350mA **CC14-F-350-PI** p. 288
- 500mA **CC14-F-500-PI** p. 288
- 24Vdc **CV30-F-24-PI** p. 292


ACCESSORIES



Recessed box
in aluminum
A01451.40




Recessed box
in aluminum with edge
A01453_0



Recessed box
for concrete
A01565.30



Spring mounting
support
A01457.60



Frame for trimless
installation
A01452.30




Hole saw for trimless
installation
A00832.H0

EXAMPLE CODE COMPOSITION

123456. CCT FINISH



IP67
 WIPS
 350
 24V
 1 m
 100 g
 2



Ridi

	1W	2W
350 / 500mA Lumen Output 3000K	350mA - 50 lm	500mA - 80 lm
10° Lens	733510. __	733511. __
30° Lens	763510. __	763511. __
40° Lens	743510. __	743511. __

FINISH	CCT
● 4 Black	● U 2200K
● B Dark Bronze	● Y 2700K
● 3 Gray	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K

	1,5W	2W
24V Lumen Output 3000K	24Vdc - 50 lm	24Vdc - 80 lm
10° Lens	734714. __	734715. __
30° Lens	764714. __	764715. __
40° Lens	744714. __	744715. __


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES



Plastic recessed box
A00409.40




Watertight connector p. 266
A00357.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



IP67
 WIPS
 Driverless
 1 m
 410 g



Odino ASY IP67


	6W
220-240Vac Lumen Output 3000K	220-240Vac - 70 lm
45° Emission	7D3869. __

FINISH	CCT
● 4 Black	● Y 2700K
● B Dark Bronze	● 6 3000K
● 3 Gray	


OPTIONAL DIMMER (not included)

D300-D-1CH-NT p. 295

ACCESSORIES




Aluminum recessed box
A00569.30



Watertight connector p. 266
A01023.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Piega 80 IP67


24V	2W
Lumen Output 3000K	24Vdc - 90 lm
Diffused Emission	7P4018. _ _

FINISH	CCT
H Black	Y 2700K
4A Anthracite Gray	6 3000K
K Corten	K 3500K CRI > 90
L Oyster White	D 4000K CRI > 90
7 White	


SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 292

ACCESSORIES




72x72 mm
Recessed-box for cement/brickwork 502E
A00880.00



Watertight connector p. 266
A00357.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Piega 140 IP67

24V	4W
Lumen Output 3000K	24Vdc - 160 lm
Diffused Emission	7P4022. _ _


220-240Vac	4W
Lumen Output 3000K	220-240Vac - 160 lm
Diffused Emission	7P4116. _ _

FINISH	CCT
H Black	Y 2700K
4A Anthracite Gray	6 3000K
K Corten	K 3500K CRI > 90
L Oyster White	D 4000K CRI > 90
7 White	


SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 292

ACCESSORIES



75x108 mm
Recessed-box for cement/brickwork 503E
A00882.00




Watertight connector p. 266
A00357.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH

Piega Series design by Valerio Sommella & Anonima Luci



Piega 80 IP67 m

24V
Lumen Output 3000K
Diffused Emission


2W
24Vdc - 90 lm
7P4020. _ _

- | FINISH | CCT |
|----------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● 4A Anthracite Gray | ● 6 3000K |
| ● K Corten | ● K 3500K CRI > 90 |
| ● L Oyster White | ● D 4000K CRI > 90 |
| ● 7 White | |

SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 292


ACCESSORIES



Watertight connector
p. 266
A00357.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Piega 140 IP67 m

24V
Lumen Output 3000K
Diffused Emission


4W
24Vdc - 160 lm
7P4024. _ _

- | FINISH | CCT |
|----------------------|--------------------|
| ● H Black | ● Y 2700K |
| ● 4A Anthracite Gray | ● 6 3000K |
| ● K Corten | ● K 3500K CRI > 90 |
| ● L Oyster White | ● D 4000K CRI > 90 |
| ● 7 White | |

SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 292



ACCESSORIES



Watertight connector
p. 266
A00357.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Arco 50 iL single light emission

350 / 500mA Lumen Output 3000K	1W 350mA - 10 lm	2W 500mA - 15 lm
Single Light Emission	703216._._	703217._._

FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● 3 Gray	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K

24V Lumen Output 3000K	1W 24Vcd - 10 lm	2W 24Vcd - 15 lm
Single Light Emission	703225._._	703226._._

Arco 50 iL double light emission

350 / 500mA Lumen Output 3000K	1W 350mA - 10 lm x 2	2W 500mA - 15 lm x 2
Double Light Emission	703214._._	703215._._

FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● 3 Gray	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K

24V Lumen Output 3000K	1W 24Vcd - 10 lm x 2	2W 24Vcd - 15 lm x 2
Double Light Emission	703223._._	703224._._

Arco 50 iL triple light emission

350 / 500mA Lumen Output 3000K	1W 350mA - 10 lm x 3	2W 500mA - 15 lm x 3
Triple Light Emission	703212._._	703213._._


FINISH	CCT
● 4 Black	● U 2200K
● T Titanium	● Y 2700K
● 3 Gray	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K

24V Lumen Output 3000K	1W 24Vcd - 10 lm x 3	2W 24Vcd - 15 lm x 3
Triple Light Emission	703221._._	703222._._


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292


ACCESSORIES



Aluminum recessed box
A00129.30






Plastic recessed box
A00250.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION





Discovery single light emission

350mA	4W
Lumen Output 3000K	350mA - 100 lm
Transparent Glass	723637._ _
Frosted Glass	713637._ _

FINISH	CCT
● 4 Black	● Y 2700K
● 3 Gray	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K

24V	4W
Lumen Output 3000K	24Vdc - 100 lm
Transparent Glass	723638._ _
Frosted Glass	713638._ _

Discovery double light emission

350mA	4W x 2
Lumen Output 3000K	350mA - 100 lm x 2
Transparent Glass	723639._ _
Frosted Glass	713639._ _

FINISH	CCT
● 4 Black	● Y 2700K
● 3 Gray	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K


24V	4W x 2
Lumen Output 3000K	24Vdc - 100 lm x 2
Transparent Glass	723640._ _
Frosted Glass	713640._ _

Discovery triple light emission

350mA	4W x 3
Lumen Output 3000K	350mA - 100 lm x 3
Transparent Glass	723641._ _
Frosted Glass	713641._ _

FINISH	CCT
● 4 Black	● Y 2700K
● 3 Gray	● 6 3000K
● 6 Stainless Steel AISI 316L	● 9 4000K


24V	4W x 3
Lumen Output 3000K	24Vdc - 100 lm x 3
Transparent Glass	723642._ _
Frosted Glass	713642._ _




SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES



Plastic recessed box
A00468.40



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION



Projectors

DESIGN E PERFORMANCE PER OGNI ESIGENZA

DGA presenta una selezione di proiettori architettonici per esterni, caratterizzati da dimensioni compatte ed elevate performance. Grazie a un rigoroso processo produttivo, l'azienda utilizza esclusivamente materie prime di alta qualità, privilegiando, dove possibile, la scelta di fornitori locali.

La proposta di proiettori, dal design ultra compatto, combina una struttura semplice con tecnologie avanzate. Disponibili in varie dimensioni e potenze, gli apparecchi garantiscono una gamma professionale di aperture luminose e accessori, assicurando prestazioni elevate e risultati impeccabili.

DESIGN AND PERFORMANCE FOR EVERY NEED


DGA presents a selection of architectural projectors for outdoor use, characterized by compact dimensions and high performance. Thanks to a rigorous production process, the company exclusively uses high-quality raw materials, prioritizing, whenever possible, the choice of local suppliers.

The range of projectors, featuring an ultra-compact design, combines a simple structure with advanced technologies. Available in various sizes and power options, the products ensure a professional range of light distributions and accessories, guaranteeing high performance and impeccable results.







- IP67
- WIPS
- 700
-
- 2 m
- 40 g
- 2




P Applique




K Stake



C Tree strap mounting



A Stake H350



B Bollard H350

Milli

700mA 2,5W
Lumen Output 3000K CRI > 90 700mA - 120 lm

10° Lens	734555. _ _ _
25° Lens	7G4555. _ _ _
40° Lens	744555. _ _ _
60° Lens	754555. _ _ _

FINISH

- 4 Black
- VC Fir Green
- MS Bright Brown
- E Massive Brass
- 3 Gray
- 6 Stainless Steel AISI 316L

CCT

- U 2200K
- X 2700K CRI > 90
- W 3000K CRI > 90
- K 3500K CRI > 90
- D 4000K CRI > 90

FIXING

- P Applique
- K Stake
- C Tree strap mounting
- A Stake H350
- B Bollard H350

Milli with hex louver

700mA 2,5W
Lumen Output 3000K CRI > 90 700mA - 85 lm

10° Lens	734563. _ _ _
25° Lens	7G4563. _ _ _
40° Lens	744563. _ _ _
60° Lens	754563. _ _ _

SUGGESTED DRIVERS (not included)

700mA CC14-F-700-PI p. 289


ACCESSORIES



Low glare visor
A01445_0



Low glare snoot
A01444_0




Watertight connector p. 266
A00357.40

EXAMPLE CODE COMPOSITION





- IP67
- WIPS
- 350
- 24V
-
-
- 2 m
- 160 g
- 2

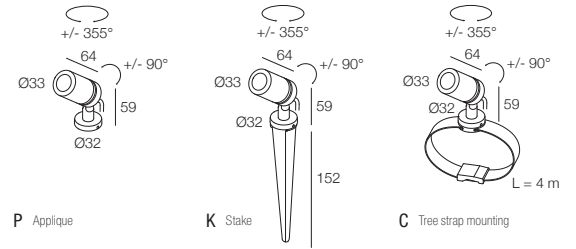

Micro

350mA		3W	
Lumen Output 3000K		350mA - 270 lm	
15° Lens		7A0833.	__ __
30° Lens		760833.	__ __
60° Lens		750833.	__ __
Frosted Glass		710832.	__ __
Elliptical Lens		770833.	__ __

24V		4W	
Lumen Output 3000K		24Vdc - 270 lm	
15° Lens		7A4716.	__ __
30° Lens		764716.	__ __
60° Lens		754716.	__ __
Frosted Glass		714716.	__ __
Elliptical Lens		774716.	__ __

FINISH	CCT	FIXING
● 4 Black	● U 2200K	P Applique
● E Massive Brass	● Y 2700K	K Stake
● 3 Gray	● 6 3000K	C Tree strap mounting
	● W 3000K CRI > 90	
	● 9 4000K	

Micro with hex louver

350mA		3W	
Lumen Output 3000K		350mA - 190 lm	
15° Lens		7A4151.	__ __
30° Lens		764151.	__ __
60° Lens		754151.	__ __
Frosted Glass		714151.	__ __
Elliptical Lens		774151.	__ __

24V		4W	
Lumen Output 3000K		24Vdc - 190 lm	
15° Lens		7A4717.	__ __
30° Lens		764717.	__ __
60° Lens		754717.	__ __
Frosted Glass		714717.	__ __
Elliptical Lens		774717.	__ __

SUGGESTED DRIVERS (not included)

- 350mA **CC14-F-350-PI** p. 288
- 24Vdc **CV30-F-24-PI** p. 292


ACCESSORIES



Low glare visor
A00846_0





Low glare snoot
A00847_0



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION



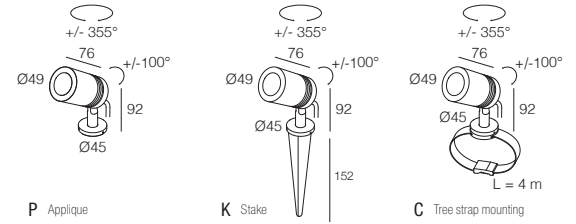

Macro IP67

Lumen Output 3000K	500 / 700 / 900mA	3W	6W	9W
		900mA - 200 lm		500mA - 450 lm
3° Lens	7T3694. _ _ _			
10° Lens			733693. _ _ _	733717. _ _ _
30° Lens			763693. _ _ _	763717. _ _ _
50° Lens			7D3693. _ _ _	7D3717. _ _ _

Lumen Output 3000K	24V	3W	7W	9W
		24Vdc - 200 lm		24Vdc - 450 lm
3° Lens	7T4124. _ _ _			
10° Lens			734125. _ _ _	734126. _ _ _
30° Lens			764125. _ _ _	764126. _ _ _
50° Lens			7D4125. _ _ _	7D4126. _ _ _

FINISH	CCT	FIXING
● 4 Black	● U 2200K	P Applique
● T Titanium	● Y 2700K	K Stake
● 3 Gray	● 6 3000K	C Tree strap mounting
	● W 3000K CRI > 90	
	● J 3500K	
	● 9 4000K	

Macro IP67 with hex louver

Lumen Output 3000K	500 / 700 / 900mA	3W	6W	9W
		900mA - 130 lm		500mA - 310 lm
3° Lens	7T3696. _ _ _			
10° Lens			733695. _ _ _	733718. _ _ _
30° Lens			763695. _ _ _	763718. _ _ _
50° Lens			7D3695. _ _ _	7D3718. _ _ _

Lumen Output 3000K	24V	3W	7W	9W
		24Vdc - 130 lm		24Vdc - 310 lm
3° Lens	7T4130. _ _ _			
10° Lens			734131. _ _ _	734132. _ _ _
30° Lens			764131. _ _ _	764132. _ _ _
50° Lens			7D4131. _ _ _	7D4132. _ _ _


SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
700mA	CC14-F-700-PI	p. 289
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES




EXAMPLE CODE COMPOSITION





- IP67
- WIPS
- 230V
- 2 m
- 460 g
- 2

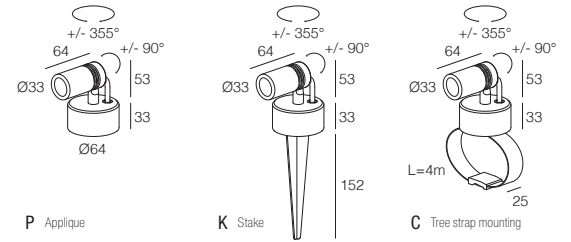

Micro 230V

220-240Vac	4W
Lumen Output: 3000K	220-240Vac - 270 lm
15° Lens	7A4774. _ _ _
30° Lens	764774. _ _ _
60° Lens	754774. _ _ _
Frosted Glass	714774. _ _ _
Elliptical Lens	774774. _ _ _

FINISH	CCT	FIXING
● 4 Black	● U 2200K	P Applique
● 3 Gray	● Y 2700K	K Stake
	● 6 3000K	C Tree strap mounting
	● W 3000K CRI > 90	
	● 9 4000K	

Micro 230V with hex louver

220-240Vac	4W
Lumen Output: 3000K	220-240Vac - 190 lm
15° Lens	7A4775. _ _ _
30° Lens	764775. _ _ _
60° Lens	754775. _ _ _
Frosted Glass	714775. _ _ _
Elliptical Lens	774775. _ _ _

ACCESSORIES


EXAMPLE CODE COMPOSITION



Low glare visor
A00846_0




Low glare snoot
A00847_0



Watertight connector p. 266
A00387.40



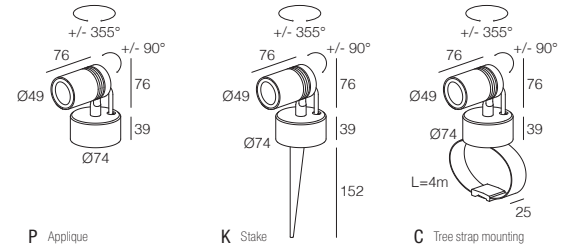

Macro IP67 230V

220-240Vac	3W	7W	10W
Lumen Output: 3000K	220-240Vac - 200 lm	220-240Vac - 450 lm	220-240Vac - 600 lm
3° Lens	7T4777._ _ _		
10° Lens		734778._ _ _	734779._ _ _
30° Lens		764778._ _ _	764779._ _ _
50° Lens		7D4778._ _ _	7D4779._ _ _


FINISH	CCT	FIXING
● 4 Black	● U 2200K	P Applique
● T Titanium	● Y 2700K	K Stake
● 3 Gray	● 6 3000K	C Tree strap mounting
	● W 3000K CRI > 90	
	● J 3500K	
	● 9 4000K	

Macro IP67 230V with hex louver

220-240Vac	3W	7W	10W
Lumen Output: 3000K	220-240Vac - 130 lm	220-240Vac - 310 lm	220-240Vac - 390 lm
3° Lens	7T4780._ _ _		
10° Lens		734781._ _ _	734782._ _ _
30° Lens		764781._ _ _	764782._ _ _
50° Lens		7D4781._ _ _	7D4782._ _ _

ACCESSORIES


EXAMPLE CODE COMPOSITION



Low glare visor
A00519_0



Low glare snoot
A00848_0




Watertight connector p. 266
A00387.40





- IP67
- WIPS
- 500 / 700
- 24V
- 2 m
- 400 g
- 2
- 2,6
- P&P
- 2,7

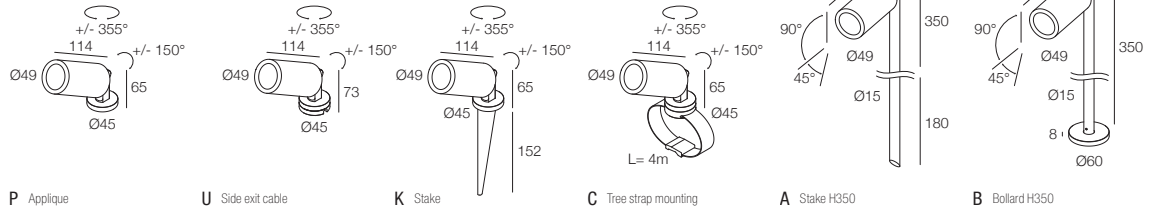

Ariel P IP67


[1] 14° Lens not interchangeable

	500 / 700mA Lumen Output 3000K	9W 500mA - 770 lm	13W 700mA - 1000 lm
14° Lens [1]	7Q4551	7Q4551	7Q4564
18° Lens	784551	784551	784564
24° Lens	7G4551	7G4551	7G4564
33° Lens	7E4551	7E4551	7E4564
52° Lens	754551	754551	754564

	24V Lumen Output 3000K	9,5W 24Vdc - 770 lm	13W 24Vdc - 1000 lm
14° Lens [1]	7Q4718	7Q4718	7Q4719
18° Lens	784718	784718	784719
24° Lens	7G4718	7G4718	7G4719
33° Lens	7E4718	7E4718	7E4719
52° Lens	754718	754718	754719

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			

● Plug&Play System

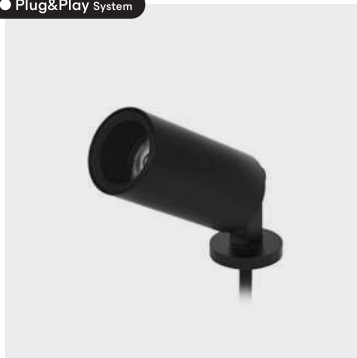

Ariel P IP67 Plug&Play

	500 / 700mA Lumen Output 3000K	9W 500mA - 770 lm	13W 700mA - 1000 lm
14° Lens	7Q4552	7Q4552	7Q4565
18° Lens	784552	784552	784565
24° Lens	7G4552	7G4552	7G4565
33° Lens	7E4552	7E4552	7E4565
52° Lens	754552	754552	754565


	24V Lumen Output 3000K	9,5W 24Vdc - 770 lm	13W 24Vdc - 1000 lm
14° Lens	7Q4720	7Q4720	7Q4721
18° Lens	784720	784720	784721
24° Lens	7G4720	7G4720	7G4721
33° Lens	7E4720	7E4720	7E4721
52° Lens	754720	754720	754721

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			

SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
700mA	CC14-F-700-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292


ACCESSORIES



Low glare visor
A00519_0




Low glare snoot
A00848_0



Watertight connector p. 266
A00387.40


INTERCHANGEABLE ACCESSORIES p. 260

EXAMPLE CODE COMPOSITION





- IP67
- WIPS
- 350
500
- 24V
- 2 m
- 730 g
- 2
- 2,6
- P&P
- 2,7

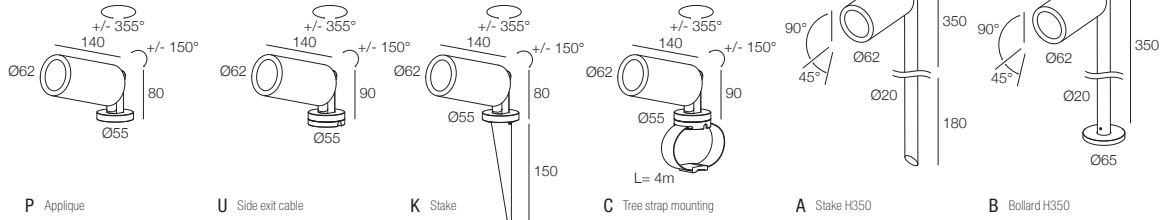

Saturno P IP67

[1] 12° Lens not interchangeable

350 / 500mA Lumen Output 3000K	12W 350mA - 1250 lm	18W 500mA - 1700 lm
12° Lens [1]	7Q4566	7Q4567
18° Lens	784566	784567
24° Lens	7G4566	7G4567
33° Lens	7E4566	7E4567
52° Lens	754566	754567

24V Lumen Output 3000K	14W 24Vdc - 1250 lm	18W 24Vdc - 1700 lm
12° Lens [1]	7Q4722	7Q4723
18° Lens	784722	784723
24° Lens	7G4722	7G4723
33° Lens	7E4722	7E4723
52° Lens	754722	754723

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			

● Plug&Play System



Saturno P IP67 Plug&Play

350 / 500mA Lumen Output 3000K	12W 350mA - 1250 lm	18W 500mA - 1700 lm
12° Lens	7Q4568	7Q4569
18° Lens	784568	784569
24° Lens	7G4568	7G4569
33° Lens	7E4568	7E4569
52° Lens	754568	754569


24V Lumen Output 3000K	14W 24Vdc - 1250 lm	18W 24Vdc - 1700 lm
12° Lens	7Q4724	7Q4725
18° Lens	784724	784725
24° Lens	7G4724	7G4725
33° Lens	7E4724	7E4725
52° Lens	754724	754725

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC20-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292


ACCESSORIES



Low glare visor
A01448_0




Low glare snoot
A01447_0



Watertight connector p. 266
A00387.40

INTERCHANGEABLE ACCESSORIES
p. 261

EXAMPLE CODE COMPOSITION






- IP67
- WIPS
- Driverless
- 2 m
- 350 g

Odino 6 P

220-240Vac	6W
Lumen Output: 3000K	220-240Vac - 270 lm
30° Lens	763737._ _
50° Reflector	7D3737._ _

FINISH	CCT
4 Black	Y 2700K
B Dark Bronze	6 3000K
3 Gray	




OPTIONAL DIMMER (not included)

ACCESSORIES

EXAMPLE CODE COMPOSITION


D300-D-1CH-NT p. 295




Low glare visor
A00519._0



Low glare snoot
A00848._0



Stainless Steel 316L stake
A00281.60



Watertight connector p. 266
A01023.40

123456 CCT FINISH




- IP67
- WIPS
- Driverless
- 2 m
- 675 g

Odino 15 P

220-240Vac	15W
Lumen Output: 3000K	220-240Vac - 750 lm
20° Lens	784051._ _
30° Lens	764051._ _

FINISH	CCT
4 Black	Y 2700K
B Dark Bronze	6 3000K
3 Gray	




OPTIONAL DIMMER (not included)


ACCESSORIES

EXAMPLE CODE COMPOSITION


D300-D-1CH-NT p. 295



Low glare visor
A00936._0




Stainless Steel 316L stake
A00281.60



Watertight connector p. 266
A01023.40


123456 CCT FINISH



Quantum P

	350 / 500mA Lumen Output 3000K	12W 350mA - 1500 lm	18W 500mA - 2100 lm
10° Reflector	733322._ _		733323._ _
20° Reflector	783322._ _		783323._ _
30° Reflector	763322._ _		763323._ _
40° Reflector	743322._ _		743323._ _

FINISH	CCT
● 4 Black	● Y 2700K
● T Titanium	● 6 3000K
● 3 Gray	● W 3000K CRI > 90
	● 9 4000K



	24W Lumen Output 3000K	14W 24Vdc - 1500 lm	18W 24Vdc - 2100 lm
10° Reflector	734726._ _		734727._ _
20° Reflector	784726._ _		784727._ _
30° Reflector	764726._ _		764727._ _
40° Reflector	744726._ _		744727._ _

SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC20-F-500-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES

EXAMPLE CODE COMPOSITION


123456 CCT FINISH



Quantum P 230V

	220-240Vac Lumen Output 3000K	15W 220-240Vac - 1500 lm	20W 220-240Vac - 2100 lm
10° Reflector	733474._ _		733475._ _
20° Reflector	783474._ _		783475._ _
30° Reflector	763474._ _		763475._ _
40° Reflector	743474._ _		743475._ _

FINISH	CCT
● 4 Black	● Y 2700K
● T Titanium	● 6 3000K
● 3 Gray	● W 3000K CRI > 90
	● 9 4000K




ACCESSORIES

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



- IP67
- WIPS
- 700
- 24V
- 2 m
- 530 g
- 2

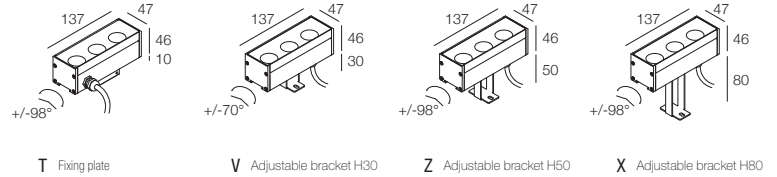

Trium P IP67

[1] The wall washer optics cannot be equipped with louver

700mA	7W RGBW
Lumen Output 3000K	700mA - 570 lm
10° Lens	734758._ 7 _ _
25° Lens	764758._ 7 _ _
40° Lens	744758._ 7 _ _
60° Lens	754758._ 7 _ _
Elliptical Lens	774758._ 7 _ _
Wall Washer [1]	7W4758._ 7W _

FINISH	CCT	OPTICAL FILTER	FIXING
● 4 Black	● 7 RGBW	W Without Filter D Louver F Asy Louver	T Fixing plate V Adjustable bracket H30 Z Adjustable bracket H50 X Adjustable bracket H80


24V	7W	15W
Lumen Output 3000K	24Vdc - 600 lm	24Vdc - 1000 lm
10° Lens	734558._ _ _ _ _	734572._ _ _ _ _
25° Lens	764558._ _ _ _ _	764572._ _ _ _ _
40° Lens	744558._ _ _ _ _	744572._ _ _ _ _
60° Lens	754558._ _ _ _ _	754572._ _ _ _ _
Elliptical Lens	774558._ _ _ _ _	774572._ _ _ _ _
Wall Washer [1]	7W4558._ _ W _	

FINISH	CCT	OPTICAL FILTER	FIXING
● 4 Black	● U 2200K ● Y 2700K ● 6 3000K ● W 3000K CRI > 90 ● J 3500K ● 9 4000K	W Without Filter D Louver F Asy Louver	T Fixing plate V Adjustable bracket H30 Z Adjustable bracket H50 X Adjustable bracket H80


SUGGESTED DRIVERS (not included)

- RGBW **CC50-X-700-NL** p. 286
- 24Vdc **CV30-F-24-PI** p. 292


ACCESSORIES




Low glare visor for T fixing
A01705.40



Low glare visor for V - Z - X fixing
A01603.40



Watertight connector p. 266
A00357.40




RGBW watertight connector p. 266
A01651.40

EXAMPLE CODE COMPOSITION





- IP67
- WIPS
- 230V
- 2 m
- 530 g
- 2

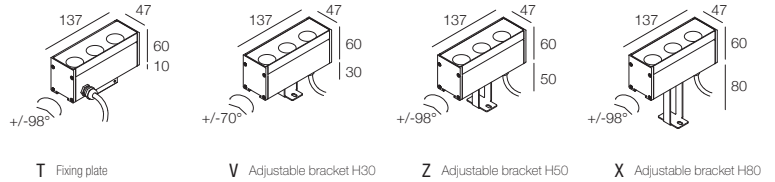

Trium P IP67 230V


[1] The wall washer optics cannot be equipped with louver

220-240Vac	8W
Lumen Output: 3000K	220-240Vac - 600 lm
10° Lens	734582.____
25° Lens	764582.____
40° Lens	744582.____
60° Lens	754582.____
Elliptical Lens	774582.____
Wall Washer [1]	7W4582. __ W _


FINISH	CCT	OPTICAL FILTER	FIXING
● 4 Black	● U 2200K	W Without Filter	T Fixing plate
	● Y 2700K	D Louver	V Adjustable bracket H30
	● 6 3000K	F Asy Louver	Z Adjustable bracket H50
	● W 3000K CRI > 90		X Adjustable bracket H80
	● J 3500K		
	● 9 4000K		

ACCESSORIES


EXAMPLE CODE COMPOSITION



Low glare visor for T fixing
A01690.40




Low glare visor for V - Z - X fixing
A01604.40



Watertight connector p. 266
A01023.40



- IP67
- WIPS
- 24V
- 2 m
- 150 g
- 2



Maestro P IP67

24V	6W
Lumen Output: 3000K CRI > 90	24Vdc - 240 lm
10° Lens	734776. __
30° Lens	764776. __
40° Lens	744776. __
60° Lens	754776. __
Elliptical Lens	774776. __


FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K

SUGGESTED DRIVERS (not included)

ACCESSORIES

EXAMPLE CODE COMPOSITION

24Vdc CV30-F-24-PI p. 292



Watertight connector p. 266
A00357.40



Bollards

ILLUMINARE IL CAMMINO CON ELEGANZA

Negli ultimi anni, DGA ha arricchito la propria offerta con una selezione di bollard progettati per illuminare in modo sofisticato camminamenti e percorsi pedonali, sia in contesti residenziali che in strutture pubbliche. Questi apparecchi si distinguono per un design elegante e raffinato, perfettamente integrabile nell'architettura circostante.


ENLIGHT THE PATH WITH ELEGANCE

In recent years, DGA has expanded its offerings to include a selection of bollards designed to elegantly enlight walkways and pedestrian paths in both residential and public spaces. These products are distinguished by their sophisticated and refined design, seamlessly integrating with the surrounding architecture.





IP67
 WIPS
 350 / 500
 2 m
 85 g / 90 g / 105 g
 SD CM 2



Spillo IP67

350 / 500mA Lumen Output 3000K	L 250	
	1W 350mA - 40 lm	2W 500mA - 50 lm
Diffused Emission	713875. __	713876. __

L 400	
1W 350mA - 40 lm	2W 500mA - 50 lm
713877. __	713878. __

L 550	
1W 350mA - 40 lm	2W 500mA - 50 lm
713879. __	713880. __

FINISH


- 4 Black
- B Dark Bronze
- 3 Gray

CCT

- U 2200K
- X 2700K CRI > 90
- W 3000K CRI > 90
- D 4000K CRI > 90



IP67
 WIPS
 350 / 500
 2 m
 90 g / 95 g / 110 g
 SD CM 2



Spillo L IP67

350 / 500mA Lumen Output 3000K	L 250	
	1W 350mA - 40 lm	2W 500mA - 50 lm
Diffused Emission	714633. __	714634. __

L 400	
1W 350mA - 40 lm	2W 500mA - 50 lm
714635. __	714636. __

L 550	
1W 350mA - 40 lm	2W 500mA - 50 lm
714637. __	714638. __

FINISH

- 4 Black
- B Dark Bronze
- 3 Gray


CCT

- U 2200K
- X 2700K CRI > 90
- W 3000K CRI > 90
- D 4000K CRI > 90

SUGGESTED DRIVERS (not included)

- 350mA **CC14-F-350-PI** p. 288
- 500mA **CC14-F-500-PI** p. 288



ACCESSORIES



Water-tight connector p. 266
A00357.40

EXAMPLE CODE COMPOSITION





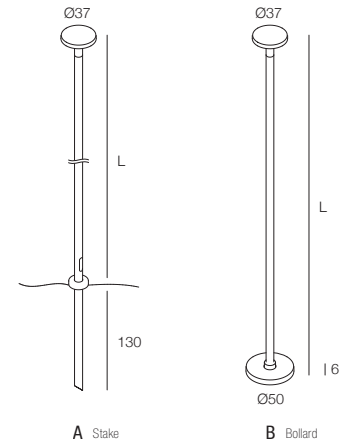

Spillo T IP67

	L 250		L 400		L 550	
350 / 500mA	1W	2W	1W	2W	1W	2W
Lumen Output 3000K	350mA - 40 lm	500mA - 50 lm	350mA - 40 lm	500mA - 50 lm	350mA - 40 lm	500mA - 50 lm
Diffused Emission	714833. _ _ _	714834. _ _ _	714835. _ _ _	714836. _ _ _	714837. _ _ _	714838. _ _ _

FINISH	CCT	FIXING
● 4 Black	● U 2200K	A Stake
● B Dark Bronze	● X 2700K CRI > 90	B Bollard
● 3 Gray	● W 3000K CRI > 90	
	● D 4000K CRI > 90	

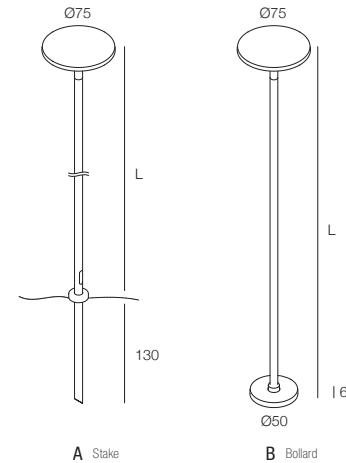

Spillo LT IP67


	L 250		L 400		L 550	
350 / 500mA	1W	2W	1W	2W	1W	2W
Lumen Output 3000K	350mA - 40 lm	500mA - 50 lm	350mA - 40 lm	500mA - 50 lm	350mA - 40 lm	500mA - 50 lm
Diffused Emission	714839. _ _ _	714840. _ _ _	714841. _ _ _	714842. _ _ _	714843. _ _ _	714844. _ _ _

FINISH	CCT	FIXING
● 4 Black	● U 2200K	A Stake
● B Dark Bronze	● X 2700K CRI > 90	B Bollard
● 3 Gray	● W 3000K CRI > 90	
	● D 4000K CRI > 90	

SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288




ACCESSORIES



Watertight connector p. 266
A00357.40

EXAMPLE CODE COMPOSITION



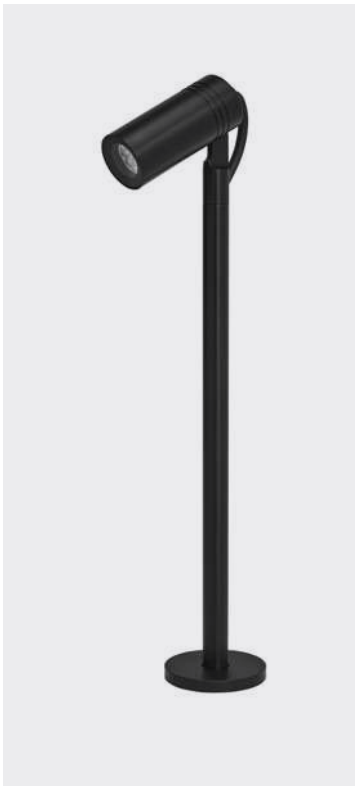

Micro H350

350mA	3W
Lumen Output 3000K	350mA - 270 lm
15° Lens	7A4104._ _
30° Lens	764104._ _
60° Lens	754104._ _
Frosted Glass	714103._ _
Elliptical Lens	774104._ _
24V	4W
Lumen Output 3000K	24Vdc - 270 lm
15° Lens	7A4732._ _
30° Lens	764732._ _
60° Lens	754732._ _
Frosted Glass	714732._ _
Elliptical Lens	774732._ _

Micro H500

3W
350mA - 270 lm
7A4330._ _
764330._ _
754330._ _
714329._ _
774330._ _
4W
24Vdc - 270 lm
7A4734._ _
764734._ _
754734._ _
714734._ _
774734._ _

FINISH	CCT
● 4 Black	● U 2200K
● MF Moka	● Y 2700K
● 4A Anthracite Gray	● 6 3000K
● VB Olive Green	● W 3000K CRI > 90
● 3 Gray	● 9 4000K

Micro H350 with hex louver

350mA	3W
Lumen Output 3000K	350mA - 190 lm
15° Lens	7A4106._ _
30° Lens	764106._ _
60° Lens	754106._ _
Frosted Glass	714105._ _
Elliptical Lens	774106._ _
24V	4W
Lumen Output 3000K	24Vdc - 190 lm
15° Lens	7A4733._ _
30° Lens	764733._ _
60° Lens	754733._ _
Frosted Glass	714733._ _
Elliptical Lens	774733._ _




Micro H500 with hex louver

3W
350mA - 190 lm
7A4332._ _
764332._ _
754332._ _
714331._ _
774332._ _
4W
24Vdc - 190 lm
7A4735._ _
764735._ _
754735._ _
714735._ _
774735._ _

SUGGESTED DRIVERS (not included)



350mA	CC14-F-350-PI	p. 288
24Vdc	CV30-F-24-PI	p. 292

ACCESSORIES



EXAMPLE CODE COMPOSITION





Macro H350

500 / 700 / 900mA	3W	6W	9W
Lumen Output: 3000K	900mA - 200 lm	500mA - 450 lm	700mA - 600 lm
3° Lens	7T4097._ _		
10° Lens		734098._ _	734099._ _
30° Lens		764098._ _	764099._ _
50° Lens		7D4098._ _	7D4099._ _

24V	3W	7W	9W
Lumen Output: 3000K	24Vdc - 200 lm	24Vdc - 450 lm	24Vdc - 600 lm
3° Lens	7T4736._ _		
10° Lens		734737._ _	734738._ _
30° Lens		764737._ _	764738._ _
50° Lens		7D4737._ _	7D4738._ _

Macro H500

3W	6W	9W
900mA - 200 lm	500mA - 450 lm	700mA - 600 lm
7T4333._ _		
	734334._ _	734335._ _
	764334._ _	764335._ _
	7D4334._ _	7D4335._ _

3W	7W	9W
24Vdc - 200 lm	24Vdc - 450 lm	24Vdc - 600 lm
7T4742._ _		
	734743._ _	734744._ _
	764743._ _	764744._ _
	7D4743._ _	7D4744._ _

- FINISH**
- 4 Black
 - MF Moka
 - 4A Anthracite Gray
 - VB Olive Green
 - 3 Gray
- CCT**
- U 2200K
 - Y 2700K
 - 6 3000K
 - W 3000K CRI > 90
 - J 3500K
 - 9 4000K

Macro H350 with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output: 3000K	900mA - 130 lm	500mA - 310 lm	700mA - 390 lm
3° Lens	7T4100._ _		
10° Lens		734101._ _	734102._ _
30° Lens		764101._ _	764102._ _
50° Lens		7D4101._ _	7D4102._ _

24V	3W	7W	9W
Lumen Output: 3000K	24Vdc - 130 lm	24Vdc - 310 lm	24Vdc - 390 lm
3° Lens	7T4739._ _		
10° Lens		734740._ _	734741._ _
30° Lens		764740._ _	764741._ _
50° Lens		7D4740._ _	7D4741._ _

Macro H500 with hex louver


3W	6W	9W
900mA - 130 lm	500mA - 310 lm	700mA - 390 lm
7T4336._ _		
	734337._ _	734338._ _
	764337._ _	764338._ _
	7D4337._ _	7D4338._ _

3W	7W	9W
24Vdc - 130 lm	24Vdc - 310 lm	24Vdc - 390 lm
7T4745._ _		
	734746._ _	734747._ _
	764746._ _	764747._ _
	7D4746._ _	7D4747._ _

SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 288
700mA	CC14-F-700-PI	p. 289
900mA	CC14-F-900-PI	p. 289
24Vdc	CV30-F-24-PI	p. 292


ACCESSORIES




Low glare visor
A00519_0




Low glare snoot
A00848_0



Anchor for concrete
A00943.60




Stainless Steel stake
A00852.60



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION



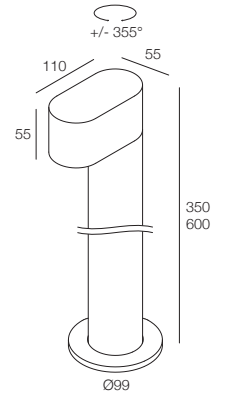

Ted H350

220-240Vac 6W
Lumen Output: 3000K 220-240Vac - 400 lm
Asymmetric Lens 7C4007._ _


Ted H600

6W
220-240Vac - 400 lm
7C4008._ _


- | FINISH | CCT |
|----------------------|--------------------|
| ● H Black | ● U 2200K |
| ● MF Moka | ● Y 2700K |
| ● 4A Anthracite Gray | ● 6 3000K |
| ● VB Olive Green | ● W 3000K CRI > 90 |
| | ● J 3500K |
| | ● 9 4000K |

ACCESSORIES

EXAMPLE CODE COMPOSITION




Anchor for concrete
A00870.60



Watertight connector p. 266
A00387.40

123456 CCT FINISH

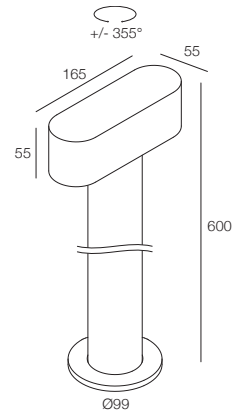

Ted T


H600

220-240Vac 6W x 2
Lumen Output: 3000K 220-240Vac - 400 lm x 2
Asymmetric Lens 7C4009._ _


- | FINISH | CCT |
|----------------------|--------------------|
| ● H Black | ● U 2200K |
| ● MF Moka | ● Y 2700K |
| ● 4A Anthracite Gray | ● 6 3000K |
| ● VB Olive Green | ● W 3000K CRI > 90 |
| | ● J 3500K |
| | ● 9 4000K |

ACCESSORIES

EXAMPLE CODE COMPOSITION



Anchor for concrete
A00870.60




Watertight connector p. 266
A00387.40

123456 CCT FINISH

Ted Series design by Valerio Sommella & Anonima Luci



IP67 WIPS 230V 2 m 3300 g 2

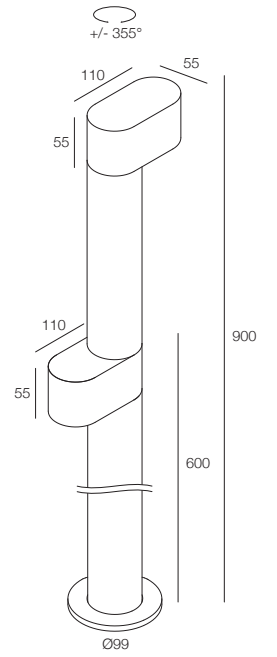


Ted Z H900


220-240Vac 6W x 2
 Lumen Output 3000K 220-240Vac - 400 lm x 2
 Asymmetric Lens 7C4010._ _

FINISH	CCT
● H Black	● U 2200K
● MF Moka	● Y 2700K
● 4A Anthracite Gray	● 6 3000K
● VB Olive Green	● W 3000K CRI > 90
	● J 3500K
	● 9 4000K

ACCESSORIES



Anchor for concrete
A00870.60



Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH

IP68 Recessed



LUCE CHE INCONTRA L'ACQUA

La passione per l'innovazione ha spinto DGA a esplorare l'acqua, un elemento tanto affascinante quanto imprevedibile. Oltre agli apparecchi per ambienti indoor ed outdoor, sono state sviluppate soluzioni di illuminazione pensate per immersioni permanenti, ideali per piscine, fontane e altri specchi d'acqua. Ogni prodotto è progettato per rispondere alle esigenze e alle sfide tecniche di ciascuna applicazione.

LIGHT MEETS WATER

The passion for innovation has driven DGA to explore water, an element as fascinating as it is unpredictable. In addition to luminaires for indoor and outdoor environments, lighting solutions have been developed for permanent immersion, ideal for pools, fountains, and other water surfaces. Each product is designed to meet the specific needs and technical challenges of every application.





Gemma 20 IP68

350 / 500mA Lumen Output 3000K CRI > 90	1W 350mA - 70 lm	2W 500mA - 95 lm
15° Lens	7A4112.6 _	7A4113.6 _
30° Lens	764112.6 _	764113.6 _
40° Lens	744112.6 _	744113.6 _
Frosted Glass	714112.6 _	714113.6 _
Transparent Glass	724112.6 _	724113.6 _
Elliptical Lens	774112.6 _	774113.6 _


FINISH	CCT
6 Stainless Steel AISI 316L	U 2200K
	X 2700K CRI > 90
	W 3000K CRI > 90
	9 4000K
	1 5000K

12V Lumen Output 3000K CRI > 90	1,5W 12Vdc - 70 lm	2W 12Vdc - 95 lm
15° Lens	7A4759.6 _	7A4760.6 _
30° Lens	764759.6 _	764760.6 _
40° Lens	744759.6 _	744760.6 _
Frosted Glass	714759.6 _	714760.6 _
Transparent Glass	724759.6 _	724760.6 _
Elliptical Lens	774759.6 _	774760.6 _



SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
12Vdc	CV20-F-12-PI	p. 290

ACCESSORIES



EXAMPLE CODE COMPOSITION



Gemma 35 IP68

350 / 500mA Lumen Output 3000K	1W 350mA - 120 lm	2W 500mA - 170 lm	3W 350mA - 100 lm
10° Lens	730920.6 _	730921.6 _	
30° Lens	760920.6 _	760921.6 _	
40° Lens	740920.6 _	740921.6 _	
Frosted Glass	710920.6 _	710921.6 _	710922.6 _
Transparent Glass	720920.6 _	720921.6 _	720922.6 _
Elliptical Lens	770920.6 _	770921.6 _	


FINISH	CCT
6 Stainless Steel AISI 316L	U 2200K
	Y 2700K
	6 3000K
	9 4000K
	1 5000K

12V Lumen Output 3000K	1,5W 12Vdc - 120 lm	2W 12Vdc - 170 lm	4W 12Vdc - 100 lm
10° Lens	734761.6 _	734762.6 _	
30° Lens	764761.6 _	764762.6 _	
40° Lens	744761.6 _	744762.6 _	
Frosted Glass	714761.6 _	714762.6 _	714763.6 _
Transparent Glass	724761.6 _	724762.6 _	724763.6 _
Elliptical Lens	774761.6 _	774762.6 _	

SUGGESTED DRIVERS (not included)



350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
12Vdc	CV20-F-12-PI	p. 290

ACCESSORIES

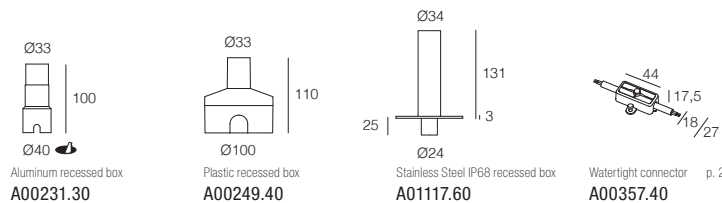

EXAMPLE CODE COMPOSITION





Arco 60 IP68

350 / 500 / 700mA	3W	6W [1]	3W RGBW
Lumen Output 3000K	350mA - 310 lm	500mA - 450 lm	700mA - 155 lm
15° Lens	7A4324.6 _	7A4327.6 _	
30° Lens	764324.6 _	764327.6 _	764929.67
60° Lens	754324.6 _	754327.6 _	
Frosted Glass	714324.6 _	714327.6 _	714929.67
Elliptical Lens	774324.6 _	774327.6 _	

FINISH

- 6 Stainless Steel AISI 316L

CCT

- U 2200K
- Y 2700K
- 6 3000K
- 9 4000K
- 1 5000K
- 7 RGBW

RGBW available on some products only

[1] 6W use only in permanent immersion

12V	3W	6W [1]
Lumen Output 3000K	12Vdc - 310 lm	12Vdc - 450 lm
15° Lens	7A4325.6 _	7A4328.6 _
30° Lens	764325.6 _	764328.6 _
60° Lens	754325.6 _	754328.6 _
Frosted Glass	714325.6 _	714328.6 _
Elliptical Lens	774325.6 _	774328.6 _


SUGGESTED DRIVERS (not included)

350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
RGBW	CC50-X-700-NL	p. 286
12Vdc	CV20-F-12-PI	p. 290


ACCESSORIES

EXAMPLE CODE COMPOSITION


123456 CCT FINISH




Aluminum recessed box
A00230.30





Plastic recessed box
A00250.40



Stainless Steel IP68 recessed box
A01086.60



Watertight connector p. 266
A00387.40



Nesis H65 IP68

350 / 500mA Lumen Output 3000K	3W 350mA - 370 lm	6W 500mA - 500 lm	3W RGB 350mA - 105 lm
10° Lens	733054.6 _	733055.6 _	733054.67
30° Lens	763054.6 _	763055.6 _	763054.67
60° Lens	753054.6 _	753055.6 _	753054.67

12V Lumen Output 3000K	4W 12Vdc - 370 lm	6W 12Vdc - 500 lm
10° Lens	734764.6 _	734765.6 _
30° Lens	764764.6 _	764765.6 _
60° Lens	754764.6 _	754765.6 _

FINISH	CCT
6 Stainless Steel AISI 316L	U 2200K
	Y 2700K
	6 3000K
	9 4000K
	1 5000K
	7 RGB


SUGGESTED DRIVERS (not included)

RGB	CC50-X-350-NL	p. 282
350mA	CC14-F-350-PI	p. 288
500mA	CC14-F-500-PI	p. 288
12Vdc	CV20-F-12-PI	p. 290

ACCESSORIES

EXAMPLE CODE COMPOSITION

123456 CCT FINISH



Arco 80 IP68

12V Lumen Output 3000K	7W 12Vdc - 570 lm	10W [1] 12Vdc - 770 lm
10° Lens	733813.6 _	733814.6 _
20° Lens	783813.6 _	783814.6 _
30° Lens	763813.6 _	763814.6 _
Frosted Glass	713813.6 _	713814.6 _

FINISH	CCT
6 Stainless Steel AISI 316L	U 2200K
	Y 2700K
	6 3000K
	9 4000K
	1 5000K

[1] 10W use only in permanent immersion

SUGGESTED DRIVERS (not included)


12Vdc	CV20-F-12-PI	p. 290
-------	--------------	--------

ACCESSORIES

EXAMPLE CODE COMPOSITION

123456 CCT FINISH





Iride 3 i IP68


500 / 700 / 1000mA	20W ALL WHITE 1000mA	10W TUNABLE WHITE 500mA	10W RGBW 700mA
30° Lens	764120.6 _	764120.68	764120.67
60° Lens	754120.6 _	754120.68	754120.67

FINISH

- 6 Stainless Steel
AISI 316L

CCT




- Y 2700K
- 6 3000K
- 9 4000K
- 1 5000K
- 8 TUNABLE WHITE
- 7 RGBW



SUGGESTED DRIVERS (not included)

- RGBW CC50-X-700-NL p. 286
- 1000mA CC52-D-1000-NL p. 287
- 500mA TW CC52-D-500-NL p. 284

ACCESSORIES



EXAMPLE CODE COMPOSITION

123456 CCT FINISH

IP68 Projectors

PROIETTORI PER OGNI SFIDA

I proiettori IP68 di DGA spingono la luce oltre ogni limite, affrontando con affidabilità anche gli ambienti più estremi. Progettati per installazioni subacquee e contesti gravosi all'aperto, offrono resistenza e versatilità, illuminando fontane e scenari esposti a condizioni climatiche difficili. Realizzati interamente in acciaio inox AISI 316L, subiscono un sofisticato processo di lucidatura e passivazione, assicurando massima durata e prestazioni impeccabili nel tempo.


PROJECTORS FOR EVERY CHALLENGE

DGA's IP68 projectors push light beyond limits, delivering reliability even in the most extreme environments. Designed for underwater installations and demanding outdoor settings, they offer durability and versatility, illuminating fountains and landscapes exposed to harsh weather conditions. Made entirely of AISI 316L stainless steel, they undergo a sophisticated polishing and passivation process, ensuring maximum longevity and flawless performance over time.





- IP68
- WIPS
- 350
- 12V
- 5 m
- 370 g
- 2



Micro IP68

350mA	3W
Lumen Output 3000K	350mA - 270 lm
15° Lens	7A4033.6 _
30° Lens	764033.6 _
60° Lens	754033.6 _
Frosted Glass	714033.6 _
Elliptical Lens	774033.6 _

FINISH	CCT
6 Stainless Steel AISI 316L	U 2200K
	Y 2700K
	6 3000K
	W 3000K CRI > 90
	9 4000K
	1 5000K

12V	4W
Lumen Output 3000K	12Vdc - 270 lm
15° Lens	7A4766.6 _
30° Lens	764766.6 _
60° Lens	754766.6 _
Frosted Glass	714766.6 _
Elliptical Lens	774766.6 _

SUGGESTED DRIVERS (not included)


- 350mA **CC14-F-350-PI** p. 288
- 12Vdc **CV30-F-12-PI** p. 290

ACCESSORIES


- 35
Ø39
9
Low glare visor
Stainless Steel 316L
A00846.60
- Ø39
35
Low glare snoot
Stainless Steel 316L
A00847.60
- Ø30
152
Stainless Steel stake
A00277.60
- 37
122 / 36,5
Waterproof connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH

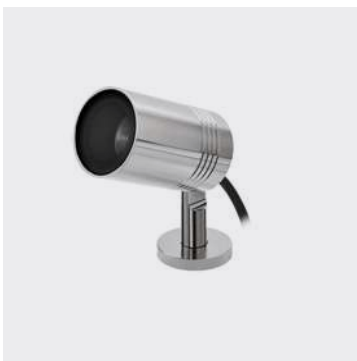

- IP68
- WIPS
- 500
- 700
- 900
- 5 m
- 900 g
- 2



Macro IP68

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 200 lm	500mA - 450 lm	700mA - 600 lm
3° Lens	7T3694.6 _		
10° Lens		733693.6 _	733717.6 _
30° Lens		763693.6 _	763717.6 _
50° Lens		7D3693.6 _	7D3717.6 _

FINISH	CCT
6 Stainless Steel AISI 316L	U 2200K
	Y 2700K
	6 3000K
	W 3000K CRI > 90
	J 3500K
	9 4000K
	1 5000K

Macro IP68 with hex louver

500 / 700 / 900mA	3W	6W	9W
Lumen Output 3000K	900mA - 130 lm	500mA - 310 lm	700mA - 390 lm
3° Lens	7T3696.6 _		
10° Lens		733695.6 _	733718.6 _
30° Lens		763695.6 _	763718.6 _
50° Lens		7D3695.6 _	7D3718.6 _

SUGGESTED DRIVERS (not included)

- 500mA **CC14-F-500-PI** p. 288
- 700mA **CC14-F-700-PI** p. 289
- 900mA **CC14-F-900-PI** p. 289

ACCESSORIES

- 49
Ø56
9
Low glare visor
Stainless Steel 316L
A00519.60
- Ø56
49
Low glare snoot
Stainless Steel 316L
A00848.60
- Ø38
152
Stainless Steel stake
A00501.60
- 37
122 / 36,5
Waterproof connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




- IP68
- WIPS
- 24V
- 5 m
- 680 g
- 2

Quantum P IP68

24V	12W
Lumen Output: 3000K	24Vdc - 1100 lm
15° Reflector	7A4304.6 _
20° Reflector	784304.6 _
30° Reflector	764304.6 _

FINISH	CCT
6 Stainless Steel AISI 316L	Y 2700K
	6 3000K
	W 3000K CRI > 90
	9 4000K
	1 5000K



SUGGESTED DRIVERS (not included)

24Vdc CV30-F-24-PI p. 292

ACCESSORIES

Stainless Steel stake
A00281.60

Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH




- IP68
- WIPS
- 500
700
1000
- 5 m
- 2800 g

Iride 3 P IP68

500 / 700 / 1000mA	20W ALL WHITE 1000mA	10W TUNABLE WHITE 500mA	10W RGBW 700mA
30° Lens	764122.6 _	764122.68	764122.67
60° Lens	754122.6 _	754122.68	754122.67

FINISH	CCT
6 Stainless Steel AISI 316L	Y 2700K
	6 3000K
	9 4000K
	1 5000K
	8 TUNABLE WHITE
	7 RGBW



SUGGESTED DRIVERS (not included)

RGBW CC50-X-700-NL p. 286
 1000mA CC52-D-1000-NL p. 287
 500mA TW CC52-D-500-NL p. 284

ACCESSORIES

Watertight connector p. 266
A00387.40

EXAMPLE CODE COMPOSITION

123456 CCT FINISH


ARMONIA E GEOMETRIA DEGLI SPAZI

I profili lineari simmetrici sono progettati per garantire una distribuzione uniforme della luce, ideale per valorizzare la geometria e le superfici di un ambiente. Questi apparecchi sono perfetti per creare atmosfere equilibrate e armoniose, mettendo in risalto volumi e rientranze delle pareti e giocando con luci e ombre che arricchiscono e amplificano la percezione degli spazi.


HARMONY AND GEOMETRY OF SPACES

Symmetrical linear profiles are designed to ensure uniform distribution of light, ideal for enhancing the geometry and surfaces of an environment. These luminaires are perfect for creating balanced and harmonious atmospheres, highlighting the volumes and recesses of the walls, and playing with light and shadows that enrich and amplify the perception of the spaces.


Symmetric Linear

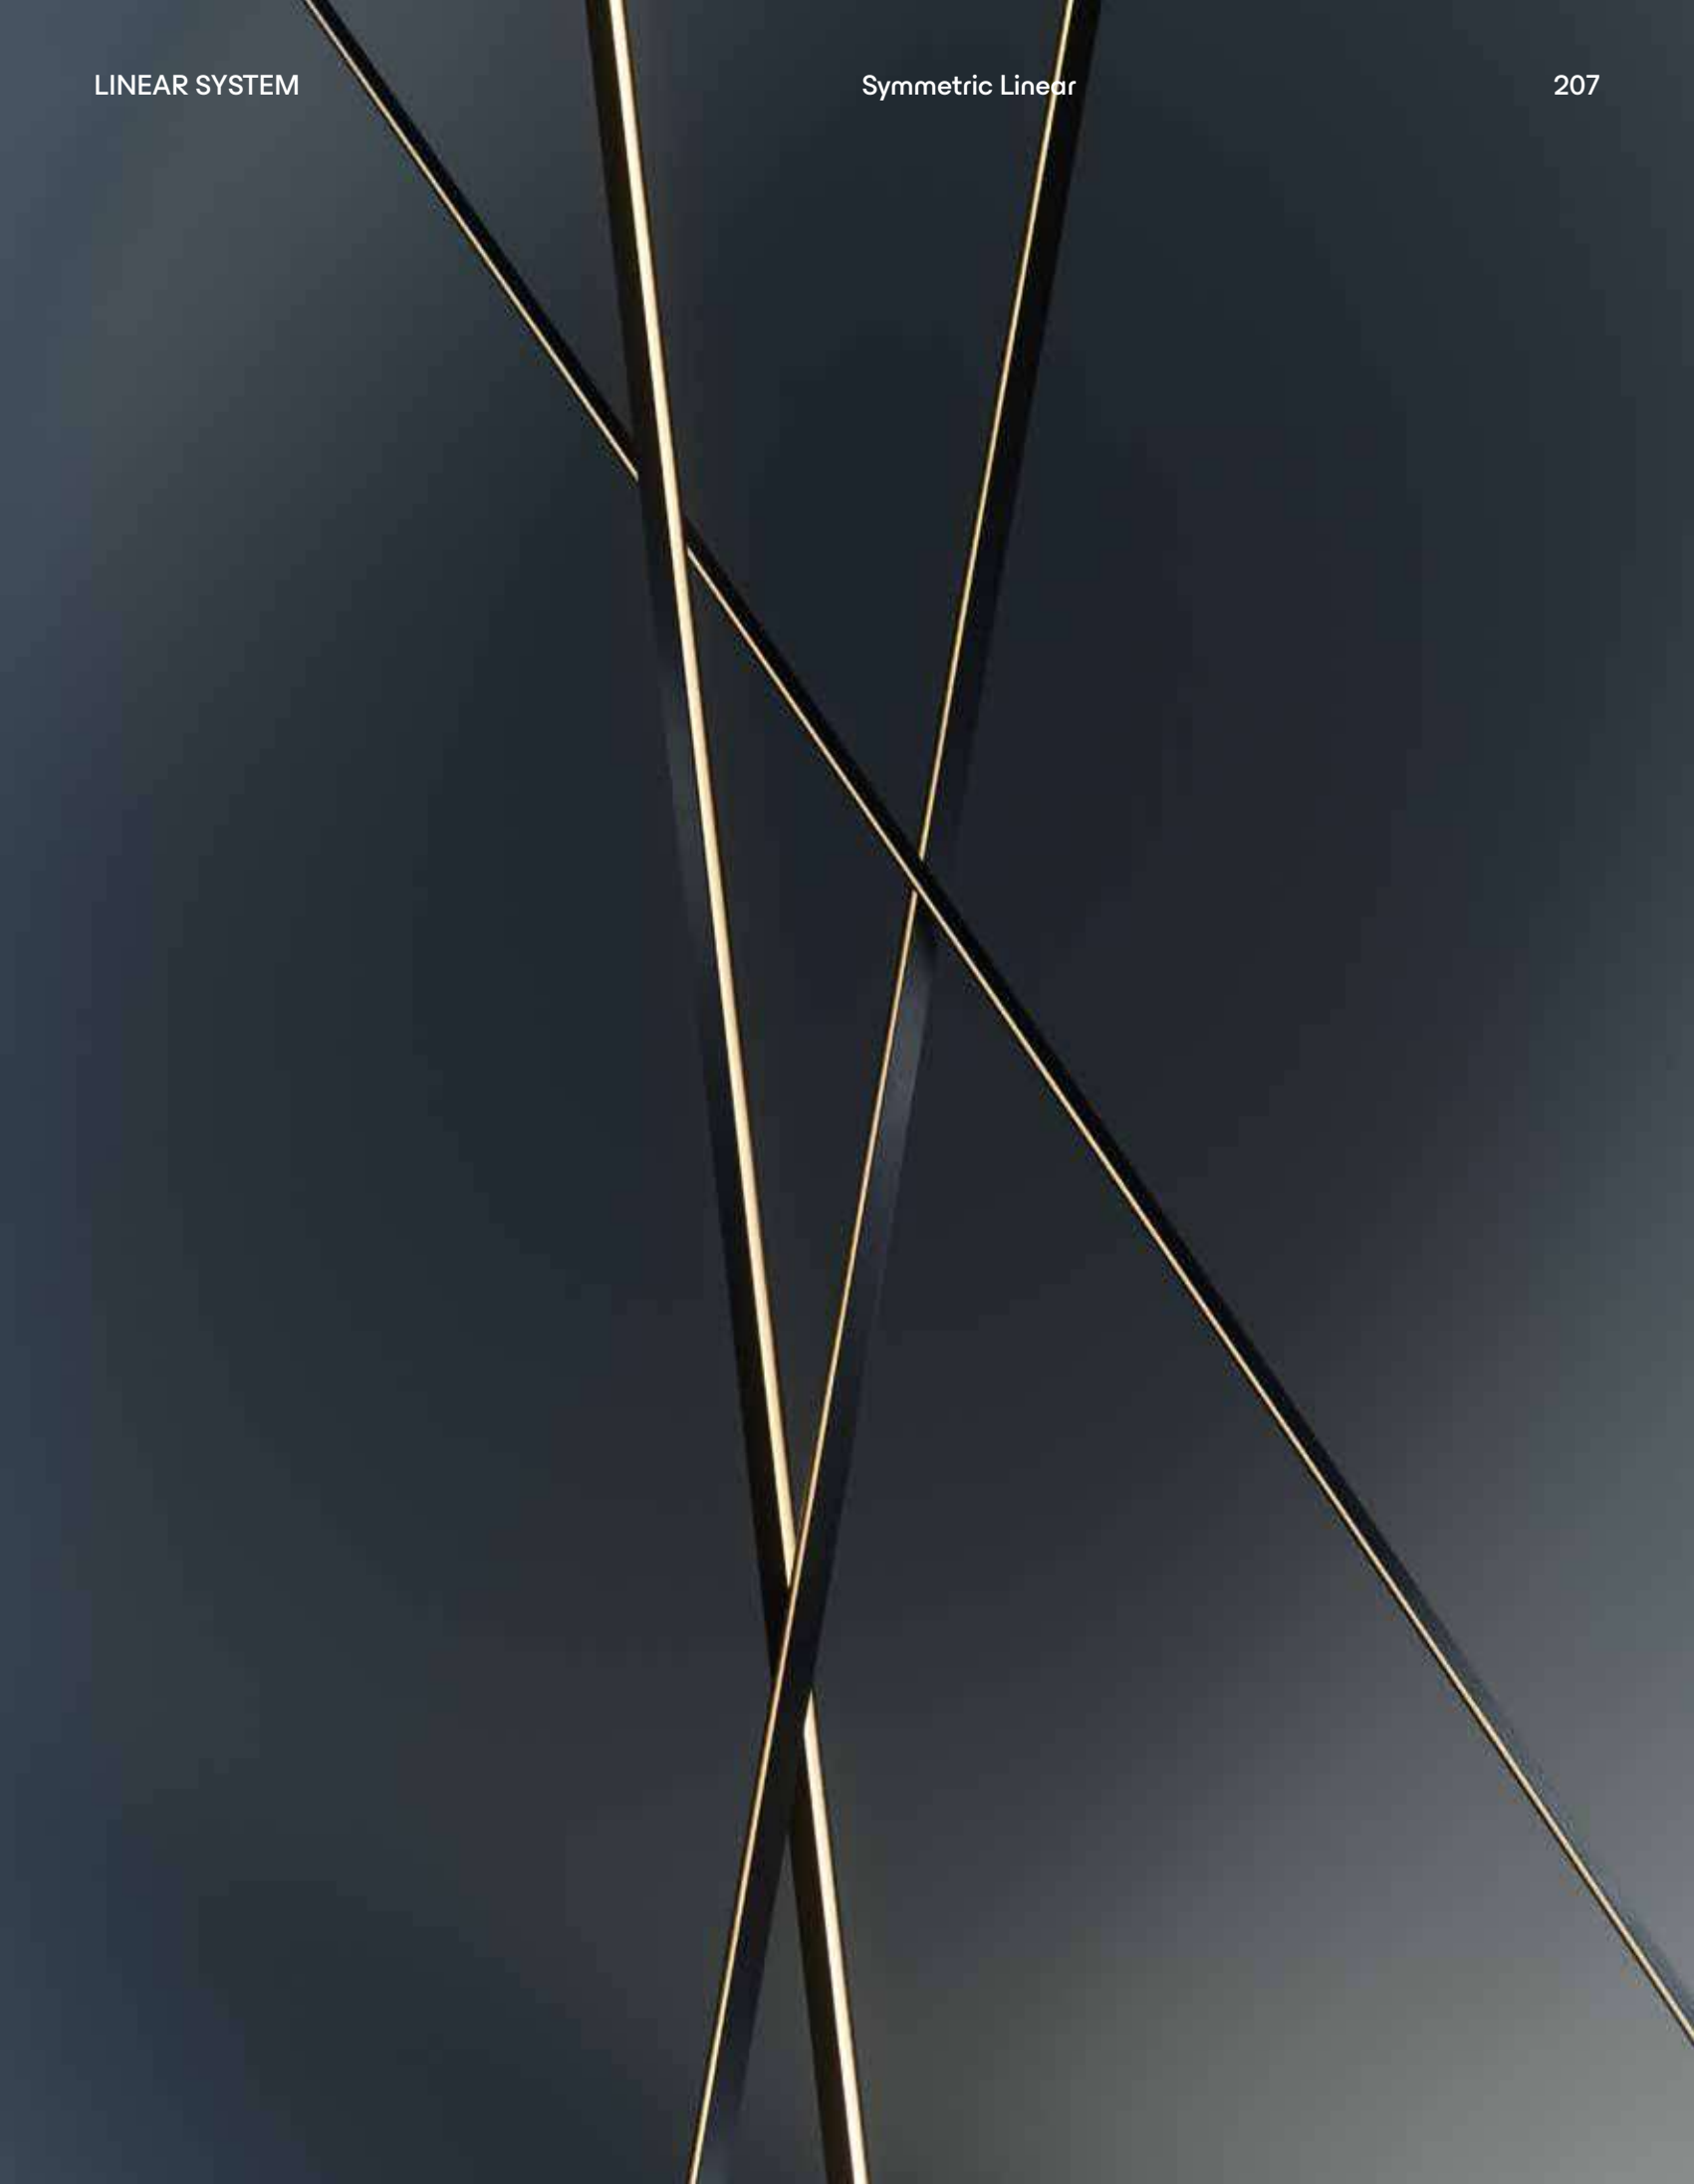


Cometa Q4

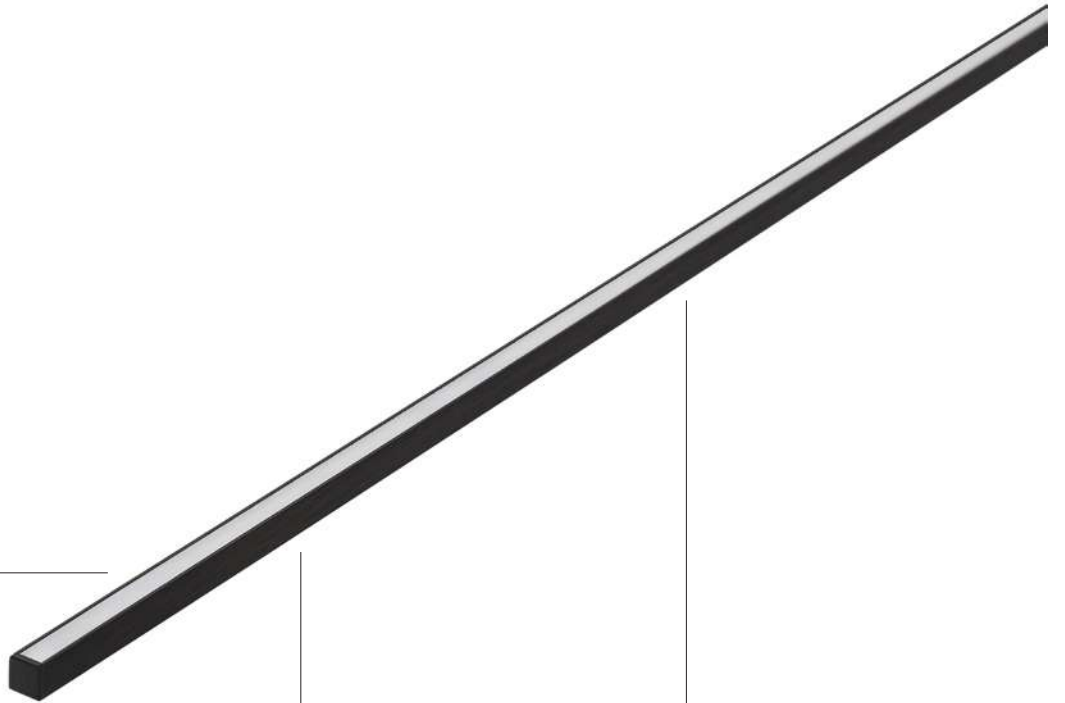

COVER




MLK
Milky Cover
32%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum

EXIT CABLE




A
Cap Exit



AB
In&Out Cap Exit


FIXING



M
Magnetic Fixing



B
Double Sided Tape




N
Without Fixing

FIXING





M
Magnetic Fixing

B
Double Sided Tape



Iron plate for **M** Magnetic Fixing
A01742.H0



Cometa Q4

Lumen Output 3000K CRI > 90
14W/m - Milky Cover - Finish Gray: 705 lm/m

CODE
LCQ4- [] - [] - [] - A - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
04 4W/m	007 013 019 025 031 037 043 049 054 060	MLK Milky Cover	A Aluminum	A Cap Exit	M Magnetic Fixing	● 4 Black	● U 2200K
08 8W/m	066 072 078 084 090 096 101 107 113 119	BLK Black Ghost Cover		AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
14 14W/m	125 131 137 143 148 154 160 166 172 178				N Without Fixing		● X 2700K CRI > 90
	184 190 196						● W 3000K CRI > 90
							● K 3500K CRI > 90
							● D 4000K CRI > 90




Custom lengths upon request

ACCESSORIES (only for N without fixing)


IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS
<p>Iron plate for Magnetic Bracket A01745.H0</p>	<p>Magnetic brackets 45° A01596._0</p>	<p>Bracket with screw 45° A01302._0</p>

SUGGESTED DRIVERS (not included)



Cometa Q8

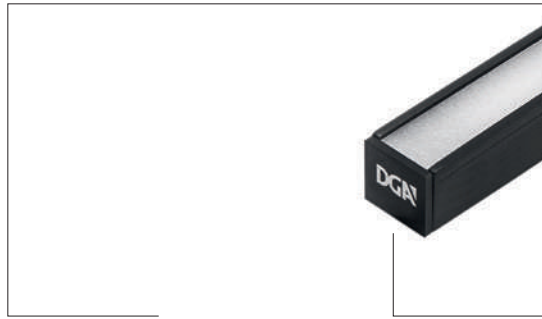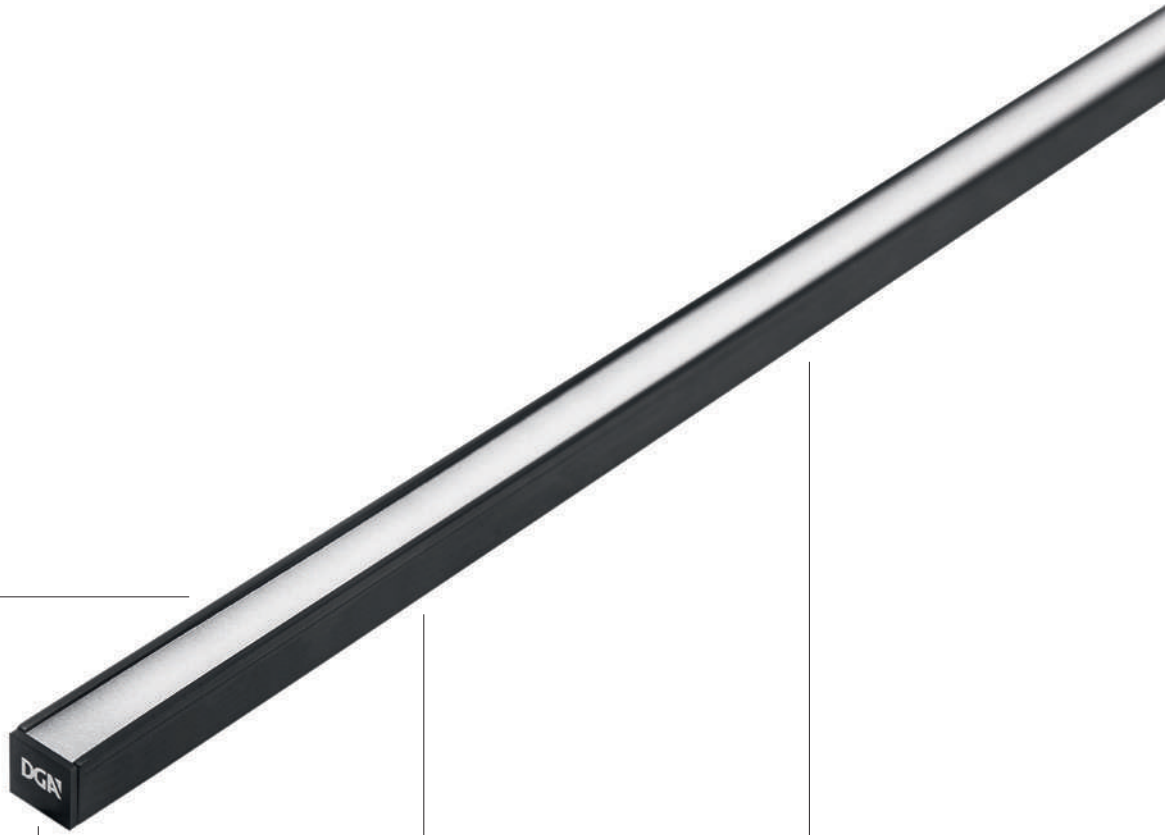








COVER

-  **TRS**
Transparent Cover
6%
-  **OPL**
Opal Cover
25%
-  **MLK**
Milky Cover
32%
-  **BLK**
Black Ghost Cover
80%




END CAP

-  **A**
Aluminum
-  **T**
Transparent


EXIT CABLE


-  **A**
Cap Exit
-  **AB**
In&Out Cap Exit
-  **C**
Left Side Exit
-  **CD**
In&Out Side Exit
-  **D**
Right Side Exit
-  **E**
Back Exit
-  **EF**
Back In&Out Exit

FIXING

-  **M**
Magnetic Fixing
-  **B**
Double Sided Tape
-  **N**
Without Fixing

FIXING

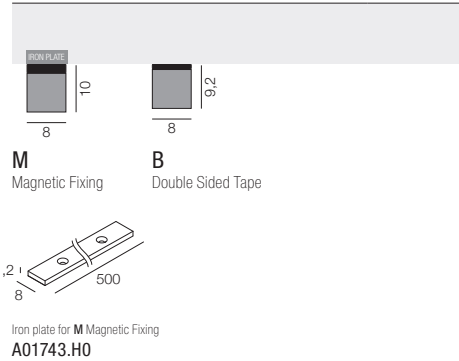



Cometa Q8

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1340 lm/m

CODE
LCQ8- [] - [] - [] - [] - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	TRS Transparent Cover	A Aluminum	A Cap Exit	M Magnetic Fixing	● 4 Black	● U 2200K
12 12W/m	034 037 040 043 046 049 052 055 058 061	OPL Opal Cover	T Transparent	AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
16 16W/m	064 067 070 073 076 079 082 085 088 091	MLK Milky Cover		C Left Side Exit	N Without Fixing		● X 2700K CRI > 90
19 19W/m	094 097 100 103 106 109 112 115 118 121	BLK Black Ghost Cover		CD In&Out Side Exit			● W 3000K CRI > 90
23 23W/m	124 127 130 133 136 139 142 145 148 151			D Right Side Exit			● K 3500K CRI > 90
	154 157 160 163 166 169 172 175 178 181			E Back Exit			● D 4000K CRI > 90
	184 187 190 193 196 199 202 205 208 211			EF Back In&Out Exit			
	214 217 220 223 226 229 232 235 238 241						
	244 247 250 253 256 259 262 265 268 271						
	274 277 280 283 286 289 292 295 298						



Custom lengths upon request

ACCESSORIES (only for N without fixing)


IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
<p>Iron plate for Magnetic Bracket A01744.H0</p>	<p>Magnetic brackets 0° A00534._0</p> <p>Magnetic brackets 45° A01755._0</p>	<p>Bracket with screw 0° A00529._0</p> <p>Bracket with screw 45° A00845._0</p>	<p>Mounting clip A00706._0</p>

SUGGESTED DRIVERS (not included)


Cometa LC




COVER



TRS
Transparent Cover
6%




OPL
Opal Cover
25%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum




T
Transparent


EXIT CABLE




A
Cap Exit




AB
In&Out Cap Exit




C
Left Side Exit




CD
In&Out Side Exit



D
Right Side Exit




E
Back Exit




EF
Back In&Out
Exit

FIXING




P
Adjustable Bracket




N
Without Fixing

FIXING

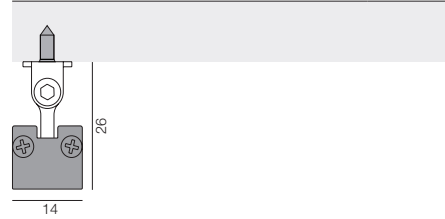

P
Adjustable Bracket



Cometa LC

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1260 lm/m

CODE
LCLC- [] - [] - [] - [] - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	TRS Transparent Cover	A Aluminum	A Cap Exit	P Adjustable Bracket	● 4 Black	● U 2200K
12 12W/m	034 037 040 043 046 049 052 055 058 061	OPL Opal Cover	T Transparent	AB In&Out Cap Exit	N Without Fixing	● 3 Gray	● Q 2500K
16 16W/m	064 067 070 073 076 079 082 085 088 091	BLK Black Ghost Cover		C Left Side Exit			● X 2700K CRI > 90
19 19W/m	094 097 100 103 106 109 112 115 118 121			CD In&Out Side Exit			● W 3000K CRI > 90
23 23W/m	124 127 130 133 136 139 142 145 148 151			D Right Side Exit			● K 3500K CRI > 90
	154 157 160 163 166 169 172 175 178 181			E Back Exit			● D 4000K CRI > 90
	184 187 190 193 196 199 202 205 208 211			EF Back In&Out Exit			
	214 217 220 223 226 229 232 235 238 241						
	244 247 250 253 256 259 262 265 268 271						
	274 277 280 283 286 289 292 295 298						



Custom lengths upon request

POWER	LENGTH TUNABLE WHITE (cm)	
16 16W/m TUNABLE WHITE	006 010 014 018 022 026 030 034 038 042	● 8 TUNABLE WHITE
	046 050 054 058 062 066 070 074 078 082	
	086 090 094 098 102 106 110 114 118 122	
	126 130 134 138 142 146 150 154 158 162	
	166 170 174 178 182 186 190 194 198 202	
	206 210 214 218 222 226 230 234 238 242	
	246 250 254 258 262 266 270 274 278 282	
	286 290 294 298	

Custom lengths upon request

ACCESSORIES (only for N without fixing)

BRACKETS WITH SCREWS




Bracket with screw 0°
A00854_0



Bracket with screw 45°
A00855_0

MOUNTING CLIP




Mounting clip
A00939_0

SUGGESTED DRIVERS (not included)


24Vdc CV70-F-24-N p. 292

24Vdc TW CV100-L-24-NL p. 291


Armonia 8x14

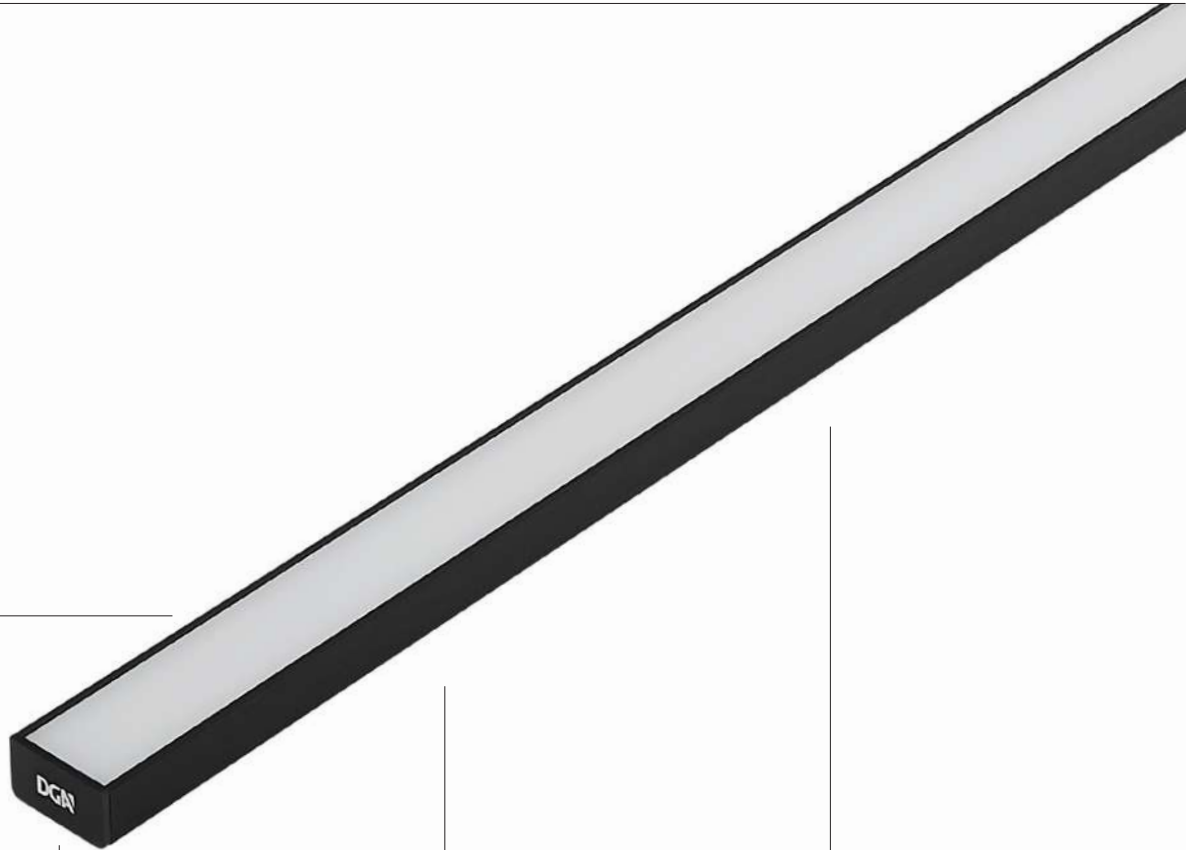


COVER

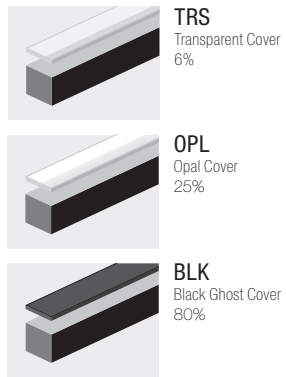


END CAP





EXIT CABLE

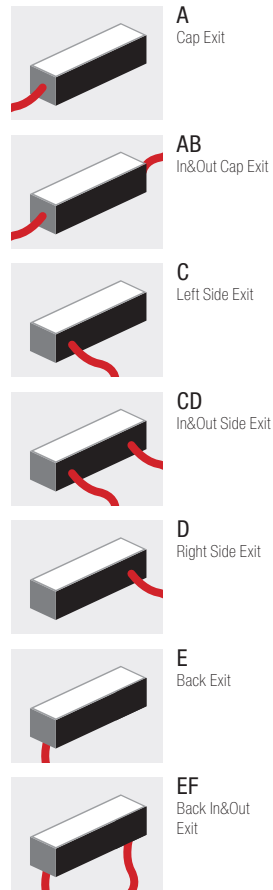


FIXING

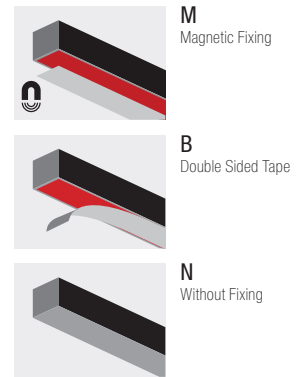

FIXING

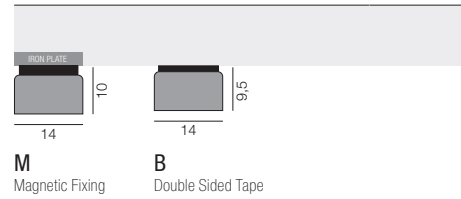

Iron plate for **M** Magnetic Fixing
A01744.H0



Armonia 8x14

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1570 lm/m

CODE
LADQ- [] - [] - [] - [] - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	TRS Transparent Cover	A Aluminum	A Cap Exit	M Magnetic Fixing	● 4 Black	● U 2200K
12 12W/m	034 037 040 043 046 049 052 055 058 061	OPL Opal Cover	T Transparent	AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
16 16W/m	064 067 070 073 076 079 082 085 088 091	BLK Black Ghost Cover		C Left Side Exit	N Without Fixing		● X 2700K CRI > 90
19 19W/m	094 097 100 103 106 109 112 115 118 121			CD In&Out Side Exit			● W 3000K CRI > 90
23 23W/m	124 127 130 133 136 139 142 145 148 151			D Right Side Exit			● K 3500K CRI > 90
	154 157 160 163 166 169 172 175 178 181			E Back Exit			● D 4000K CRI > 90
	184 187 190 193 196 199 202 205 208 211			EF Back In&Out Exit			
	214 217 220 223 226 229 232 235 238 241						
	244 247 250 253 256 259 262 265 268 271						
	274 277 280 283 286 289 292 295 298						

Custom lengths upon request

POWER	LENGTH TUNABLE WHITE (cm)	
16 16W/m TUNABLE WHITE	006 010 014 018 022 026 030 034 038 042	● 8 TUNABLE WHITE
	046 050 054 058 062 066 070 074 078 082	
	086 090 094 098 102 106 110 114 118 122	
	126 130 134 138 142 146 150 154 158 162	
	166 170 174 178 182 186 190 194 198 202	
	206 210 214 218 222 226 230 234 238 242	
	246 250 254 258 262 266 270 274 278 282	
	286 290 294 298	

Custom lengths upon request


ACCESSORIES (only for N without fixing)

IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
<p>Iron plate for Magnetic Bracket A01746.H0</p>	<p>Magnetic brackets 0° A01610._0</p>	<p>Bracket with screw 0° A01609._0</p>	<p>Mounting clip A01606._0</p>


SUGGESTED DRIVERS (not included)

- 24Vdc CV70-F-24-N p. 292
- 24Vdc TW CV100-L-24-NL p. 291


Armonia

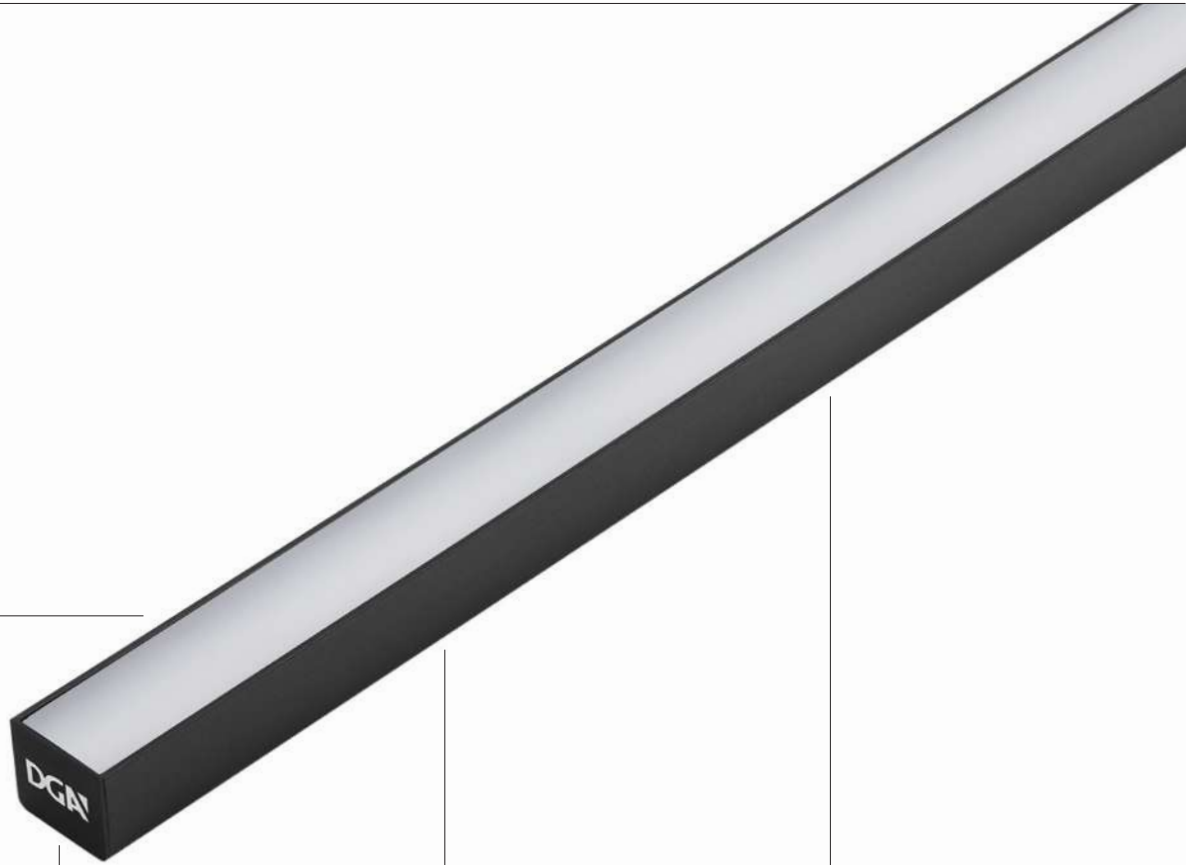


COVER



TRS
Transparent Cover
6%




OPL
Opal Cover
25%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum




T
Transparent


EXIT CABLE




A
Cap Exit




AB
In&Out Cap Exit




C
Left Side Exit




CD
In&Out Side Exit



D
Right Side Exit




E
Back Exit




EF
Back In&Out
Exit


FIXING



M
Magnetic Fixing




B
Double Sided Tape




N
Without Fixing


FIXING




M
Magnetic Fixing



B
Double Sided Tape



Iron plate for **M** Magnetic Fixing
A01744.H0



Armonia

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1220 lm/m

CODE
LADC- [] - [] - [] - [] - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	TRS Transparent Cover	A Aluminum	A Cap Exit	M Magnetic Fixing	● 4 Black	● U 2200K
12 12W/m	034 037 040 043 046 049 052 055 058 061	OPL Opal Cover	T Transparent	AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
16 16W/m	064 067 070 073 076 079 082 085 088 091	BLK Black Ghost Cover		C Left Side Exit	N Without Fixing		● X 2700K CRI > 90
19 19W/m	094 097 100 103 106 109 112 115 118 121			CD In&Out Side Exit			● W 3000K CRI > 90
23 23W/m	124 127 130 133 136 139 142 145 148 151			D Right Side Exit			● K 3500K CRI > 90
	154 157 160 163 166 169 172 175 178 181			E Back Exit			● D 4000K CRI > 90
	184 187 190 193 196 199 202 205 208 211			EF Back In&Out Exit			
	214 217 220 223 226 229 232 235 238 241						
	244 247 250 253 256 259 262 265 268 271						
	274 277 280 283 286 289 292 295 298						

Custom lengths upon request

POWER	LENGTH TUNABLE WHITE (cm)	
16 16W/m TUNABLE WHITE	006 010 014 018 022 026 030 034 038 042	● 8 TUNABLE WHITE
	046 050 054 058 062 066 070 074 078 082	
	086 090 094 098 102 106 110 114 118 122	
	126 130 134 138 142 146 150 154 158 162	
	166 170 174 178 182 186 190 194 198 202	
	206 210 214 218 222 226 230 234 238 242	
	246 250 254 258 262 266 270 274 278 282	
	286 290 294 298	

Custom lengths upon request

ACCESSORIES (only for N without fixing)

IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
1.5 x 19 x 500	13 x 19	13 x 22	17 x 13
Iron plate for Magnetic Bracket A01746.H0	Magnetic brackets 0° A00533._0	Bracket with screw 0° A00494._0	Mounting clip A00705._0
	Magnetic brackets 45° A01754._0	Bracket with screw 20° A00491._0	
		Bracket with screw 30° A00492._0	
		Bracket with screw 45° A00493._0	
		Bracket with screw 60° A00495._0	

SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N p. 292
24Vdc TW CV100-L-24-NL p. 291


Armonia Linear Lens




LENS




END CAP





EXIT CABLE

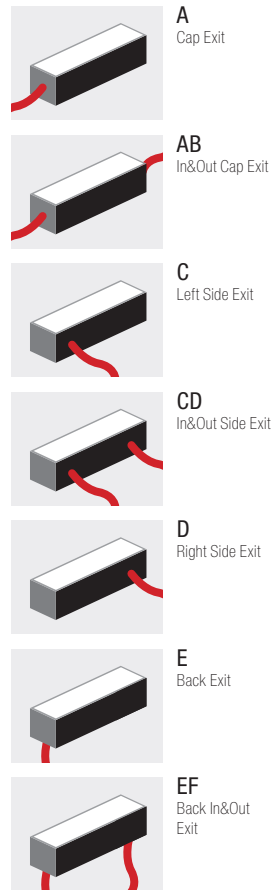


FIXING

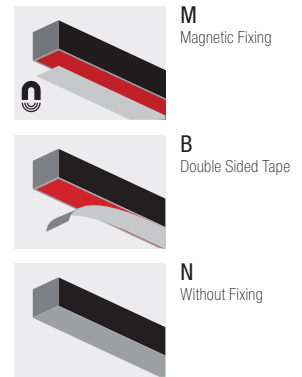

FIXING



Iron plate for M Magnetic Fixing
A01744.H0



Armonia Linear Lens

Lumen Output 3000K CRI > 90

23W/m - 40° Linear Lens - Finish Black: 1700 lm/m

CODE
LALL - [] - [] - L40 - [] - [] - []

POWER	LENGTH (cm)	LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	L40 40° Linear Lens	A Aluminum T Transparent	A Cap Exit AB In&Out Cap Exit C Left Side Exit CD In&Out Side Exit D Right Side Exit E Back Exit EF Back In&Out Exit	M Magnetic Fixing B Double Sided Tape N Without Fixing	● 4 Black ● 3 Gray	● U 2200K ● Q 2500K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90
12 12W/m	034 037 040 043 046 049 052 055 058 061						
16 16W/m	064 067 070 073 076 079 082 085 088 091						
19 19W/m	094 097 100 103 106 109 112 115 118 121						
23 23W/m	124 127 130 133 136 139 142 145 148 151 154 157 160 163 166 169 172 175 178 181 184 187 190 193 196 199 202 205 208 211 214 217 220 223 226 229 232 235 238 241 244 247 250 253 256 259 262 265 268 271 274 277 280 283 286 289 292 295 298						

Custom lengths upon request

POWER	LENGTH TUNABLE WHITE (cm)	
16 16W/m TUNABLE WHITE	006 010 014 018 022 026 030 034 038 042 046 050 054 058 062 066 070 074 078 082 086 090 094 098 102 106 110 114 118 122 126 130 134 138 142 146 150 154 158 162 166 170 174 178 182 186 190 194 198 202 206 210 214 218 222 226 230 234 238 242 246 250 254 258 262 266 270 274 278 282 286 290 294 298	● 8 TUNABLE WHITE

Custom lengths upon request


ACCESSORIES (only for N without fixing)

IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
1.5 x 19 x 500	19 x 19	33 x 22	17 x 15
Iron plate for Magnetic Bracket A01746.H0	Magnetic brackets 0° A00533._0	Bracket with screw 0° A00494._0	Mounting clip A00705._0
	Magnetic brackets 45° A01754._0	Bracket with screw 20° A00491._0	
		Bracket with screw 30° A00492._0	
		Bracket with screw 45° A00493._0	
		Bracket with screw 60° A00495._0	


SUGGESTED DRIVERS (not included)

- 24Vdc CV70-F-24-N p. 292
- 24Vdc TW CV100-L-24-NL p. 291


Armonia Curva

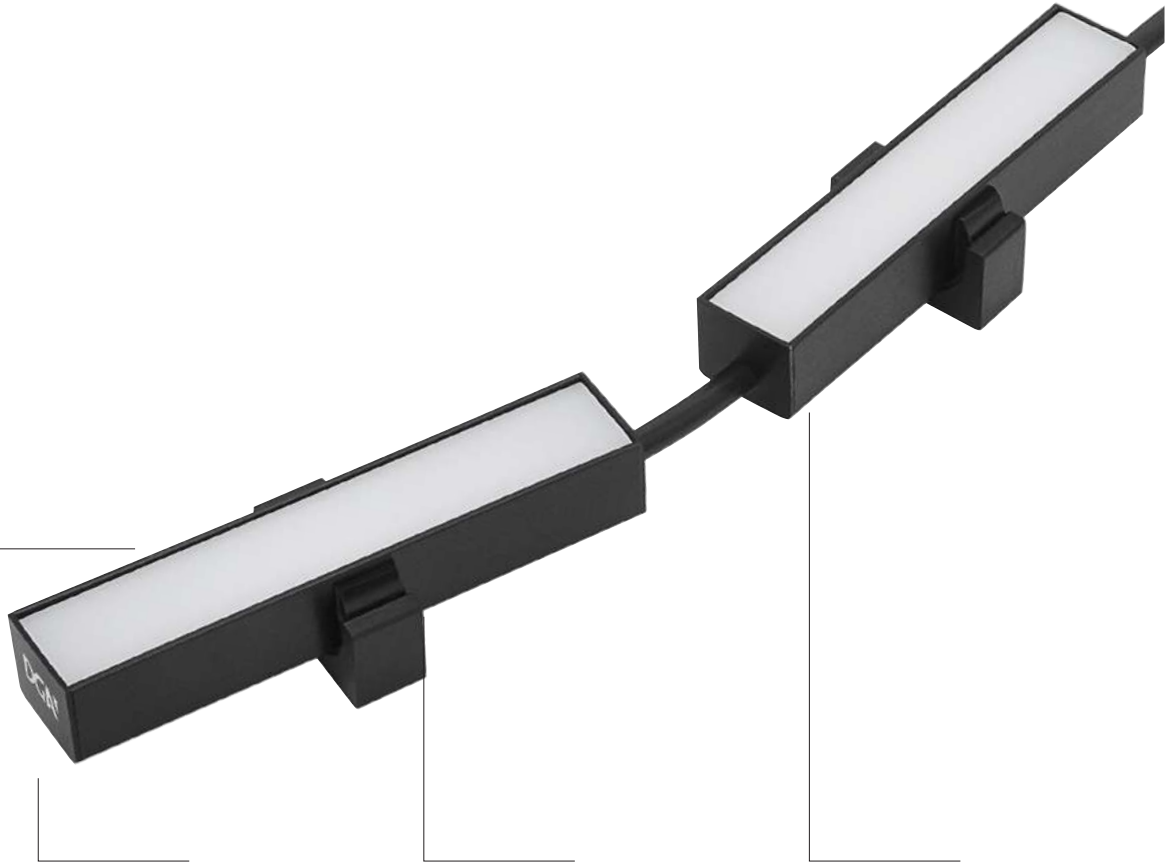


COVER



TRS
Transparent Cover
6%




OPL
Opal Cover
25%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum

EXIT CABLE




AB
In&Out Cap Exit

FIXING




M
Adjustable bracket
with Magnetic Fixing




P
Adjustable bracket
with Screw

FIXING

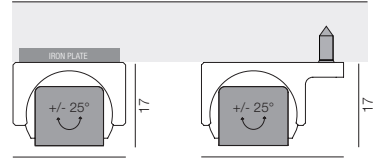


M
Adjustable bracket
with Magnetic Fixing

P
Adjustable bracket
with Screw




Iron plate for **M** Magnetic Fixing
A01747.H0

SUGGESTED DRIVERS (not included)



Technical drawing magnetic fixing

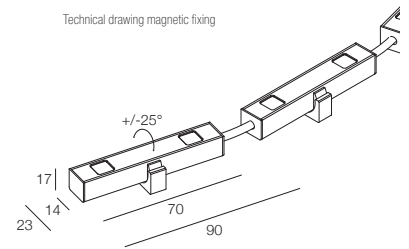


Armonia Curva Lens


Lumen Output 3000K CRI > 90
30W/m - 10° Lens - Finish Black: 1500 lm/m

CODE
LAC1 - 30 - [] - [] - A - AB - [] . []

POWER	LENGTH (cm)	LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
30 30W/m	007 016 025 034 043 052 061 070 079 088 097 106 115 124 133 142 151 160 169 178	L10 10° Lens L30 30° Lens L40 40° Lens L60 60° Lens LEL Elliptical Lens	A Aluminum	AB In&Out Cap Exit	M Adjustable bracket with Magnetic Fixing P Adjustable bracket with Screw	● 4 Black ● 3 Gray	● U 2200K ● Y 2700K ● X 2700K CRI > 90 ● 6 3000K ● W 3000K CRI > 90 ● 9 4000K ● D 4000K CRI > 90 ● 1 5000K
	Custom lengths upon request						



Technical drawing magnetic fixing

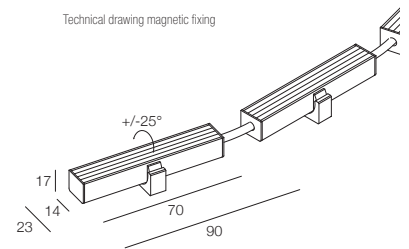


Armonia Curva Linear Lens


Lumen Output 3000K CRI > 90
15W/m - 40° Linear Lens - Finish Black: 750 lm/m

CODE
LACL - 15 - [] - [] - L40 - A - AB - [] . []

POWER	LENGTH (cm)	LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
15 15W/m	007 016 025 034 052 070 079 088 097 106 115 124 133 142	L40 40° Linear Lens	A Aluminum	AB In&Out Cap Exit	M Adjustable bracket with Magnetic Fixing P Adjustable bracket with Screw	● 4 Black ● 3 Gray	● U 2200K ● Q 2500K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90
	Custom lengths upon request						



Technical drawing magnetic fixing

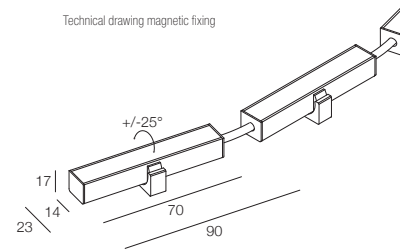


Armonia Curva Opal Cover

Lumen Output 3000K CRI > 90
15W/m - Opal Cover - Finish Gray: 550 lm/m


CODE
LACU - 15 - [] - [] - A - AB - [] . []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
15 15W/m	007 016 025 034 052 070 079 088 097 106 115 124 133 142	TRS Transparent Cover OPL Opal Cover BLK Black Ghost Cover	A Aluminum	AB In&Out Cap Exit	M Adjustable bracket with Magnetic Fixing P Adjustable bracket with Screw	● 4 Black ● 3 Gray	● U 2200K ● Q 2500K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90
	Custom lengths upon request						

Cometa Q8 IP67

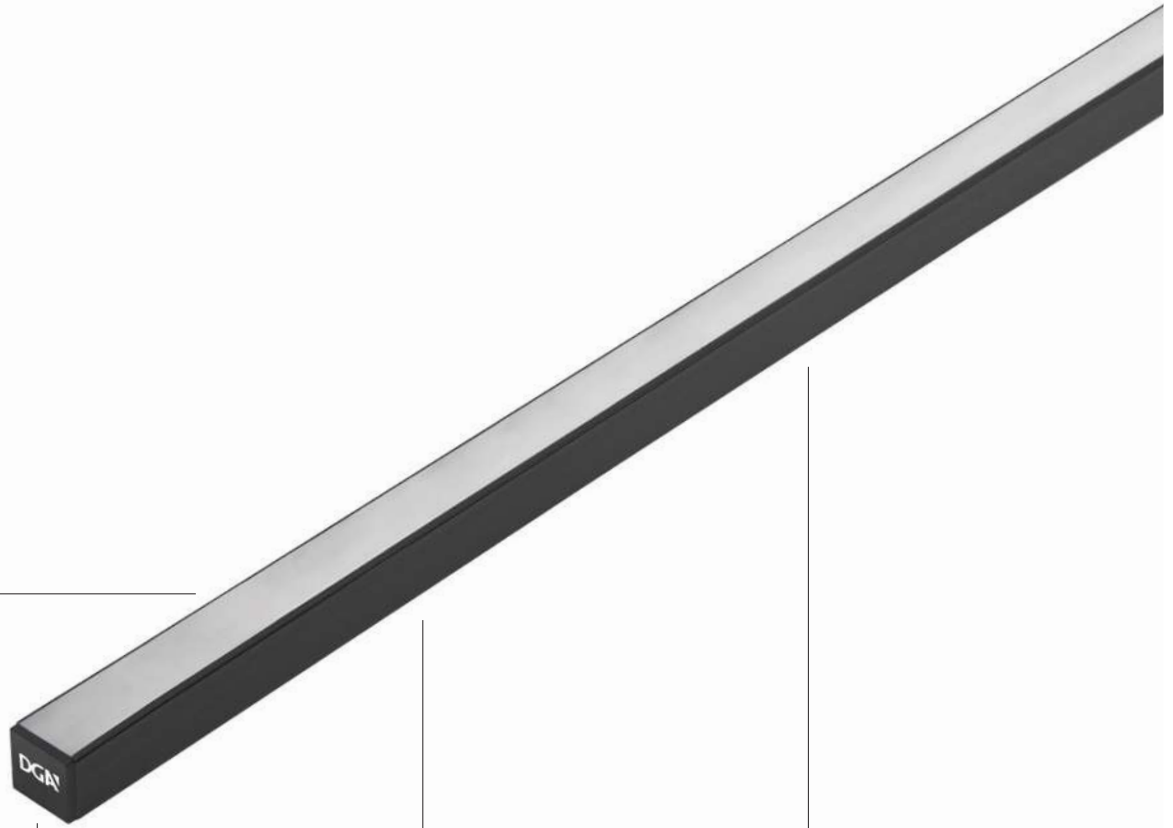


COVER




OPL
Opal Cover
25%

END CAP




A
Aluminum


EXIT CABLE




A
Cap Exit




AB
In&Out Cap Exit



C
Left Side Exit




CD
In&Out Side Exit




D
Right Side Exit

FIXING



N
Without Fixing



Cometa Q8 IP67

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1170 lm/m

CODE
LC87 - [] - [] - OPL - A - [] - N . []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	005 008 011 014 017 020 023 026 029 032	OPL Opal Cover	A Aluminum	A Cap Exit AB In&Out Cap Exit C Left Side Exit CD In&Out Side Exit D Right Side Exit	N Without Fixing	● 4 Black ● 3 Gray	● Y 2700K ● 6 3000K ● K 3500K CRI > 90 ● D 4000K CRI > 90
12 12W/m	035 038 041 044 047 050 053 056 059 062						
16 16W/m	065 068 071 074 077 080 083 086 089 092						
19 19W/m	095 098 101 104 107 110 113 116 119 122						
23 23W/m	125 128 131 134 137 140 143 146 149 152 155 158 161 164 167 170 173 176 179 182 185 188 191 194 197 200						

Custom lengths upon request

ACCESSORIES (only for N without fixing)

BRACKETS WITH SCREWS		MOUNTING CLIP	
A00529_0	A00845_0	A00954.60	A00357.40


SUGGESTED DRIVERS (not included)

24Vdc CV75-F-24-PI p. 292

Cometa LC IP67




COVER




OPL
Opal Cover
25%

END CAP




A
Aluminum


EXIT CABLE




A
Cap Exit




AB
In&Out Cap Exit




C
Left Side Exit




CD
In&Out Side Exit



D
Right Side Exit




E
Back Exit




EF
Back In&Out
Exit

FIXING




P
Adjustable Bracket




N
Without Fixing

FIXING



P
Adjustable Bracket



Cometa LC IP67

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1300 lm/m

CODE
LCL7 - [] - [] - OPL - A - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	005 008 011 014 017 020 023 026 029 032	OPL Opal Cover	A Aluminum	A Cap Exit	P Adjustable Bracket	● 4 Black	● Y 2700K
12 12W/m	035 038 041 044 047 050 053 056 059 062			AB In&Out Cap Exit	N Without Fixing	● 3 Gray	● 6 3000K
16 16W/m	065 068 071 074 077 080 083 086 089 092			C Left Side Exit			● K 3500K CRI > 90
19 19W/m	095 098 101 104 107 110 113 116 119 122			CD In&Out Side Exit			● D 4000K CRI > 90
23 23W/m	125 128 131 134 137 140 143 146 149 152			D Right Side Exit			
	155 158 161 164 167 170 173 176 179 182			E Back Exit			
	185 188 191 194 197 200			EF Back In&Out Exit			

Custom lengths upon request

ACCESSORIES (only for N without fixing)

BRACKETS WITH SCREWS

33 | 22

13 | 22 | 33

Bracket with screw 0°
A00854_0

Bracket with screw 45°
A00855_0

MOUNTING CLIP

17 | 16

16 | 13 | 25

Mounting clip
A00856.60

44 | 17,5 | 18 | 27

Watertight connector p. 266
A00357.40


SUGGESTED DRIVERS (not included)

24Vdc CV75-F-24-PI p. 292

Meteora Flex IP65




COVER




OPL
Opal Cover
25%

END CAP




S
Silicon

EXIT CABLE




A
Cap Exit




AB
In&Out Cap Exit

FIXING



B
Double Sided Tape



Meteora Flex IP65

Lumen Output 3000K CRI > 90
18W/m - Opal Cover - Finish Black: 1000 lm/m

CODE
LMFX- 18 - [] - OPL - S - [] - B . 0 []


POWER LENGTH (cm) COVER END CAP EXIT CABLE FIXING FINISH CCT

18	18W/m	005	009	012	015	019	022	025	029	032	035	OPL	Opal Cover	S	Silicon	A	Cap Exit	B	Double Sided Tape	O	Neutral	<ul style="list-style-type: none"> ● Y 2700K ● X 2700K CRI > 90 ● 6 3000K ● W 3000K CRI > 90 ● 9 4000K ● D 4000K CRI > 90
	039	042	045	049	052	055	059	062	065	069												
	072	075	079	082	085	089	092	095	099	102												
	105	109	112	115	119	122	125	129	132	135												
	139	142	145	149	152	155	159	162	165	168												
	172	175	178	182	185	188	192	195	198	202												
	205	208	212	215	218	222	225	228	232	235												
	238	242	245	248	252	255	258	262	265	268												
	272	275	278	282	285	288	292	295	298	302												
	305	308	312	315	318	322	325	328	332	335												
	338	342	345	348	352	355	358	362	365	368												
	372	375	378	382	385	388	392	395	398	402												
	405	408	412	415	418	422	425	428	432	435												
	438	442	445	448	452	456	458	462	465	468												
	472	475	478	482	485	488	492	495	498	501												


Custom lengths upon request

ACCESSORIES

MOUNTING CLIP



Mounting clip
A00719.70



Watertight connector p. 266
A00357.40

SUGGESTED DRIVERS (not included)

24Vdc CV75-F-24-PI p. 292


Asymmetric Linear

SOLUZIONI ASIMMETRICHE PER AMBIENTI ESPOSITIVI


I profili lineari asimmetrici offrono elevate prestazioni in dimensioni compatte, garantendo una luce continua e uniforme. Le ottiche inclinate a 45°, unitamente alle ottiche wall washer e ai tappi progettati per ottimizzare l'emissione luminosa, rendono questi apparecchi ideali per musei e ambienti espositivi, illuminando le pareti fino a 2 metri di altezza.

ASYMMETRIC SOLUTIONS FOR EXHIBITION SPACES

The asymmetric linear profiles offer high performance in compact sizes, ensuring continuous and uniform light. The 45° angled optics, along with the wall washer optics and end caps designed to optimize light emission, make these fixtures ideal for museums and exhibition spaces, enlightening walls up to 2 meters in height.

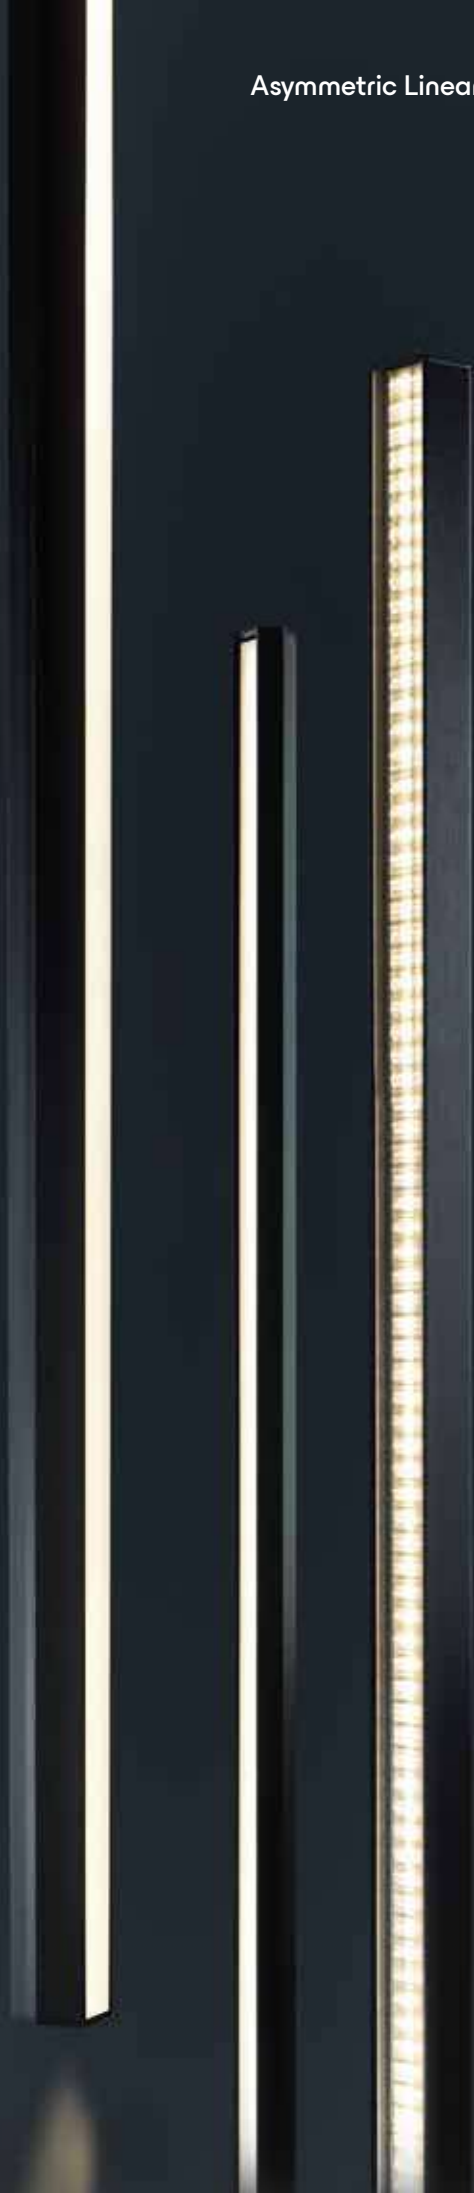



Cometa NGL

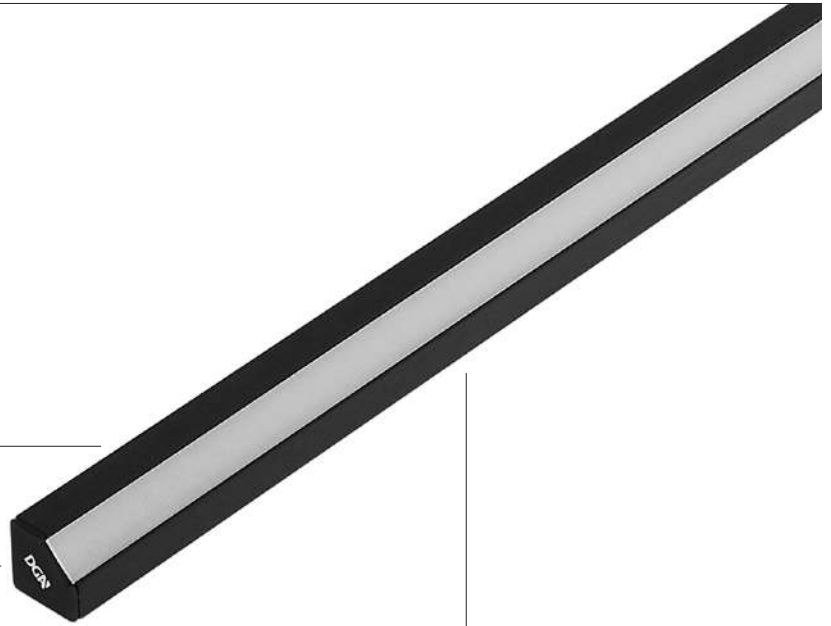










COVER

-  **TRS**
Transparent Cover
6%
-  **OPL**
Opal Cover
25%
-  **MLK**
Milky Cover
32%
-  **BLK**
Black Ghost Cover
80%




END CAP

-  **A**
Aluminum
-  **T**
Transparent



EXIT CABLE



-  **A**
Cap Exit Left
-  **AB**
In&Out Cap Exit
-  **B**
Cap Exit Right
-  **C**
Left Side Exit
-  **CD**
In&Out Side Exit
-  **D**
Right Side Exit
-  **E**
Back Exit Left
-  **EF**
Back In&Out Exit
-  **F**
Back Exit Right

FIXING ELEMENTS

-  **M**
Magnetic Fixing
-  **B**
Double Sided Tape
-  **N**
Without Fixing

FIXING

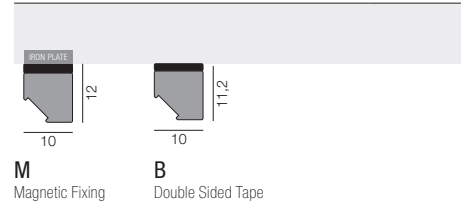

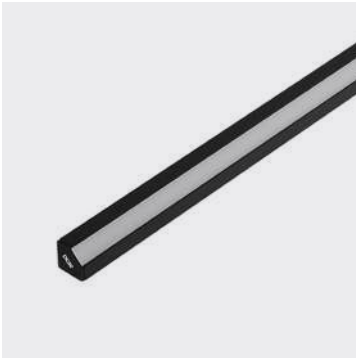

Cometa NGL

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1340 lm/m



CODE
LNG1- [] - [] - [] - [] - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	TRS Transparent Cover	A Aluminum	A Cap Exit Left	M Magnetic Fixing	● 4 Black	● U 2200K
12 12W/m	034 037 040 043 046 049 052 055 058 061	OPL Opal Cover	T Transparent	AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
16 16W/m	064 067 070 073 076 079 082 085 088 091	MLK Milky Cover		B Cap Exit Right	N Without Fixing		● X 2700K CRI > 90
19 19W/m	094 097 100 103 106 109 112 115 118 121	BLK Black Ghost Cover		C Left Side Exit			● W 3000K CRI > 90
23 23W/m	124 127 130 133 136 139 142 145 148 151			CD In&Out Side Exit			● K 3500K CRI > 90
	154 157 160 163 166 169 172 175 178 181			D Right Side Exit			● D 4000K CRI > 90
	184 187 190 193 196 199 202 205 208 211			E Back Exit Left			
	214 217 220 223 226 229 232 235 238 241			EF Back In&Out Exit			
	244 247 250 253 256 259 262 265 268 271			F Back Exit Right			
	274 277 280 283 286 289 292 295 298						

Custom lengths upon request


ACCESSORIES (only for N without fixing)

BRACKETS WITH SCREWS



Bracket with screw 0°
A00784...0


MOUNTING CLIP




Mounting clip
A00713...0

SUGGESTED DRIVERS (not included)


Cometa NGL TuttaLuce

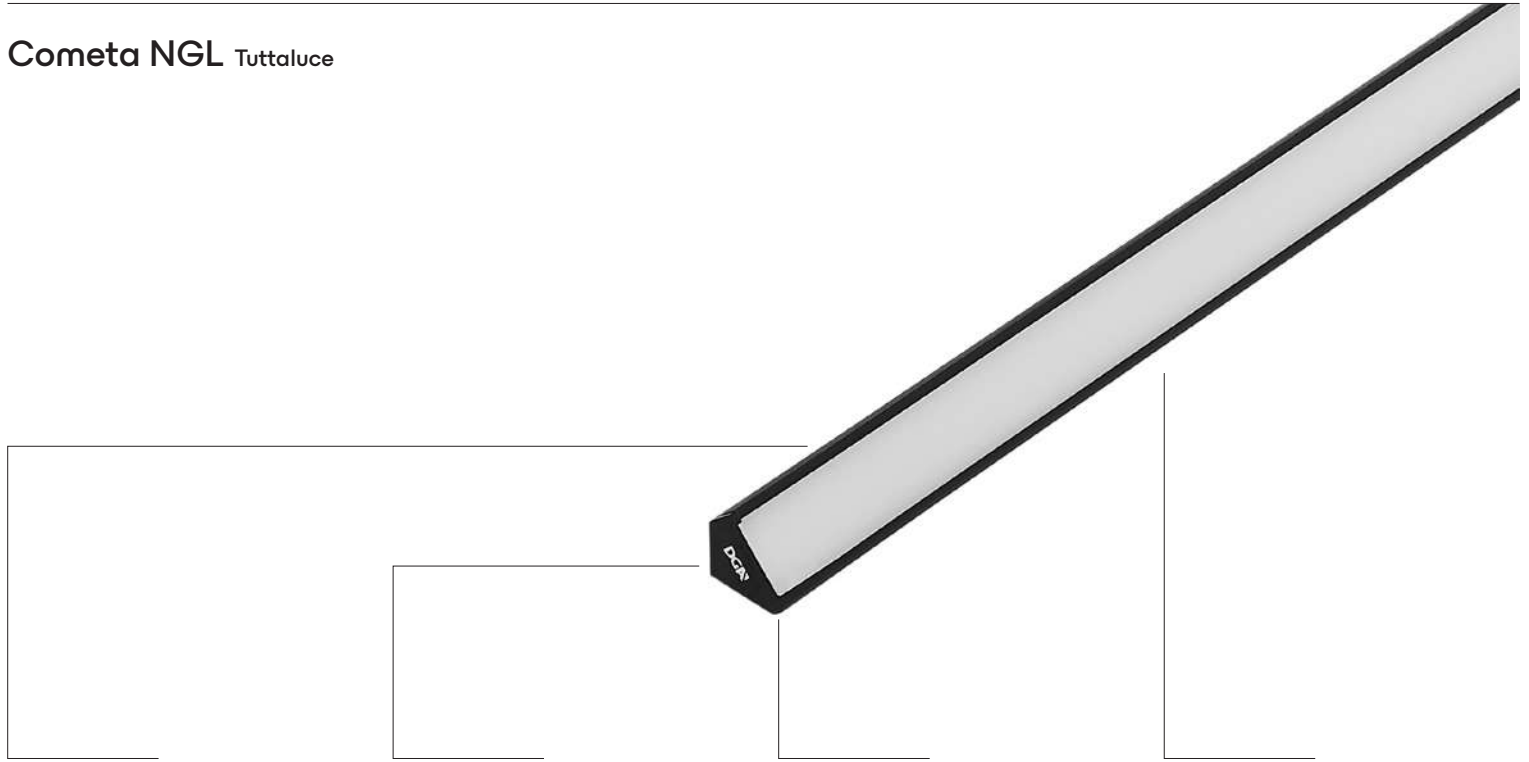


COVER



OPL
Opal Cover
25%




MLK
Milky Cover
32%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum




T
Transparent


EXIT CABLE




A
Cap Exit Left




AB
In&Out Cap Exit




B
Cap Exit Right




C
Left Side Exit




CD
In&Out Side Exit




D
Right Side Exit



E
Back Exit Left



EF
Back In&Out Exit



F
Back Exit Right


FIXING ELEMENTS



M
Magnetic Fixing





B
Double Sided Tape





N
Without Fixing

FIXING

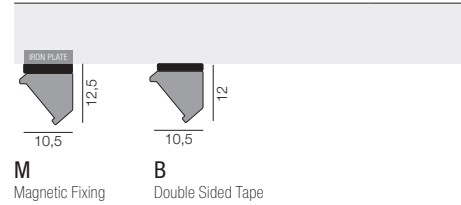

Iron plate for **M** Magnetic Fixing
A01745.H0

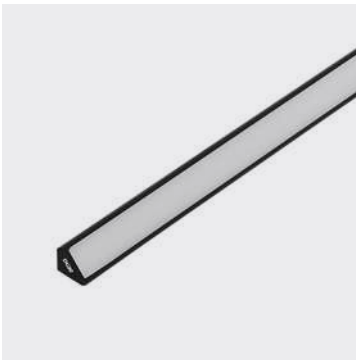

Cometa NGL Tuttaluze

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1360 lm/m




POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	OPL Opal Cover	A Aluminum	A Cap Exit Left	M Magnetic Fixing	● 4 Black	● U 2200K
12 12W/m	034 037 040 043 046 049 052 055 058 061	MLK Milky Cover	T Transparent	AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
16 16W/m	064 067 070 073 076 079 082 085 088 091	BLK Black Ghost Cover		B Cap Exit Right	N Without Fixing		● X 2700K CRI > 90
19 19W/m	094 097 100 103 106 109 112 115 118 121			C Left Side Exit			● W 3000K CRI > 90
23 23W/m	124 127 130 133 136 139 142 145 148 151			CD In&Out Side Exit			● K 3500K CRI > 90
	154 157 160 163 166 169 172 175 178 181			D Right Side Exit			● D 4000K CRI > 90
	184 187 190 193 196 199 202 205 208 211			E Back Exit Left			
	214 217 220 223 226 229 232 235 238 241			EF Back In&Out Exit			
	244 247 250 253 256 259 262 265 268 271			F Back Exit Right			
	274 277 280 283 286 289 292 295 298						

Custom lengths upon request


ACCESSORIES (only for N without fixing)

BRACKETS WITH SCREWS



Bracket with screw 0°
A01621_0

MOUNTING CLIP




Mounting clip
A01612.60

SUGGESTED DRIVERS (not included)


Armonia NGL 30




COVER



TRS
Transparent Cover
6%




OPL
Opal Cover
25%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum




T
Transparent


EXIT CABLE




A
Cap Exit Left




AB
In&Out Cap Exit




B
Cap Exit Right




C
Left Side Exit




CD
In&Out Side Exit



D
Right Side Exit



E
Back Exit Left




EF
Back In&Out Exit



F
Back Exit Right


FIXING ELEMENTS



M
Magnetic Fixing




B
Double Sided Tape




N
Without Fixing

FIXING

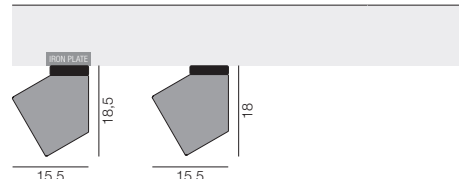


M
Magnetic Fixing

B
Double Sided Tape



Iron plate for **M** Magnetic Fixing
A01745.H0



Armonia NGL 30

Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1320 lm/m

CODE
LAN3-

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004 007 010 013 016 019 022 025 028 031	TRS Transparent Cover	A Aluminum	A Cap Exit Left	M Magnetic Fixing	● 4 Black	● U 2200K
12 12W/m	034 037 040 043 046 049 052 055 058 061	OPL Opal Cover	T Transparent	AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
16 16W/m	064 067 070 073 076 079 082 085 088 091	BLK Black Ghost Cover		B Cap Exit Right	N Without Fixing		● X 2700K CRI > 90
19 19W/m	094 097 100 103 106 109 112 115 118 121			C Left Side Exit			● W 3000K CRI > 90
23 23W/m	124 127 130 133 136 139 142 145 148 151			CD In&Out Side Exit			● K 3500K CRI > 90
	154 157 160 163 166 169 172 175 178 181			D Right Side Exit			● D 4000K CRI > 90
	184 187 190 193 196 199 202 205 208 211			E Back Exit Left			
	214 217 220 223 226 229 232 235 238 241			EF Back In&Out Exit			
	244 247 250 253 256 259 262 265 268 271			F Back Exit Right			
	274 277 280 283 286 289 292 295 298						



Custom lengths upon request

POWER	LENGTH TUNABLE WHITE (cm)	
16 16W/m TUNABLE WHITE	006 010 014 018 022 026 030 034 038 042	● 8 TUNABLE WHITE
	046 050 054 058 062 066 070 074 078 082	
	086 090 094 098 102 106 110 114 118 122	
	126 130 134 138 142 146 150 154 158 162	
	166 170 174 178 182 186 190 194 198 202	
	206 210 214 218 222 226 230 234 238 242	
	246 250 254 258 262 266 270 274 278 282	
	286 290 294 298	

Custom lengths upon request

ACCESSORIES (only for N without fixing)

BRACKETS WITH SCREWS




Bracket with screw 0°
A01622...0


SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N p. 292
24Vdc TW CV100-L-24-NL p. 291

Armonia Wall Washer

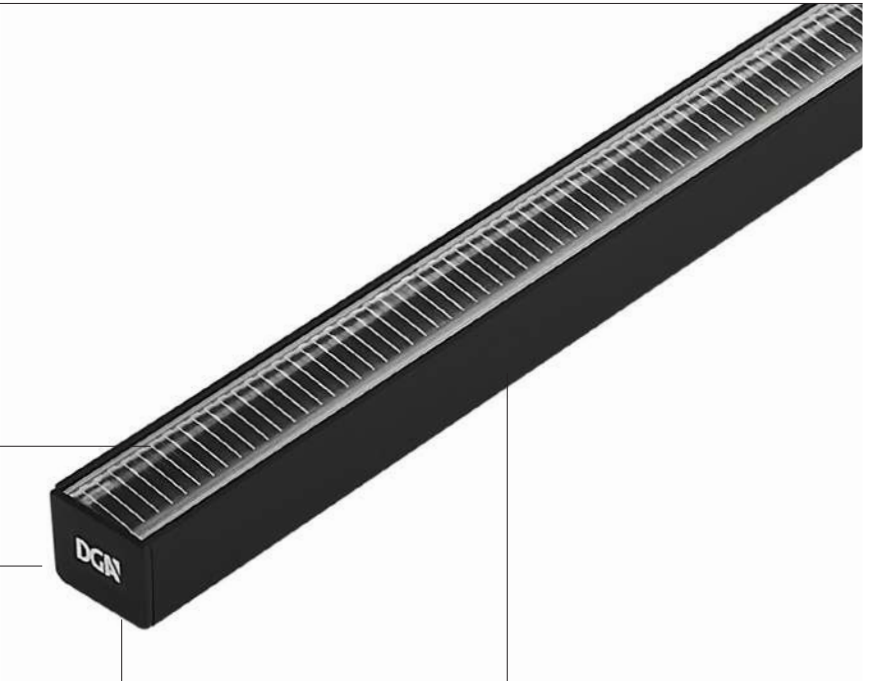


COVER




LWW
Wall Washer Lens

END CAP




A
Aluminum




T
Transparent

EXIT CABLE




A
Cap Exit Left




AB
In&Out Cap Exit




B
Cap Exit Right



C
Left Side Exit




CD
In&Out Side Exit



D
Right Side Exit



E
Back Exit Left




EF
Back In&Out Exit



F
Back Exit Right

FIXING ELEMENTS




M
Magnetic Fixing



B
Double Sided Tape




V
Visor Fixing



N
Without Fixing


FIXING

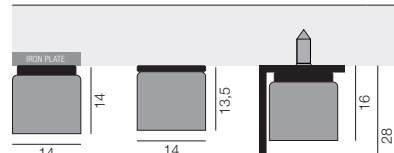


M
Magnetic Fixing

B
Double Sided Tape

V
Visor Fixing



Iron plate for **M** Magnetic Fixing
A01744.H0



Armonia Wall Washer

Lumen Output 3000K CRI > 90
23W/m - Wall Washer Lens - Finish Gray: 1860 lm/m

CODE
LAWW - [] - [] - LWW - [] - [] - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	005 007 009 011 013 015 017 019 021 023	LWW Wall Washer Lens	A Aluminum T Transparent	A Cap Exit Left AB In&Out Cap Exit B Cap Exit Right C Left Side Exit CD In&Out Side Exit D Right Side Exit E Back Exit Left EF Back In&Out Exit F Back Exit Right	M Magnetic Fixing B Double Sided Tape V Visor Fixing N Without Fixing	● 4 Black ● 3 Gray	● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90
12 12W/m	025 027 029 031 033 035 037 039 041 043						
16 16W/m	045 047 049 051 053 055 057 059 061 063						
19 19W/m	065 067 069 071 073 075 077 079 081 083						
23 23W/m	085 087 089 091 093 095 097 099 101 103 105 107 109 111 113 115 117 119 121 123 125 127 129 131 133 135 137 139 141 143 145 147 149 151 153 155 157 159 161 163 165 167 169 171 173 175 177 179 181 183 185 187 189 191 193 195 197 199 201						

Custom lengths upon request


ACCESSORIES (only for N without fixing)

IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
19 500	19 19	33 22	17
Iron plate for Magnetic Bracket A01746.H0	Magnetic brackets 0° A00533._0	Bracket with screw 0° A00494._0	Mounting clip A00705._0
	Magnetic brackets 45° A01754._0	Bracket with screw 20° A00491._0	
		Bracket with screw 30° A00492._0	
		Bracket with screw 45° A00493._0	
		Bracket with screw 60° A00495._0	


SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N p. 292


Nova

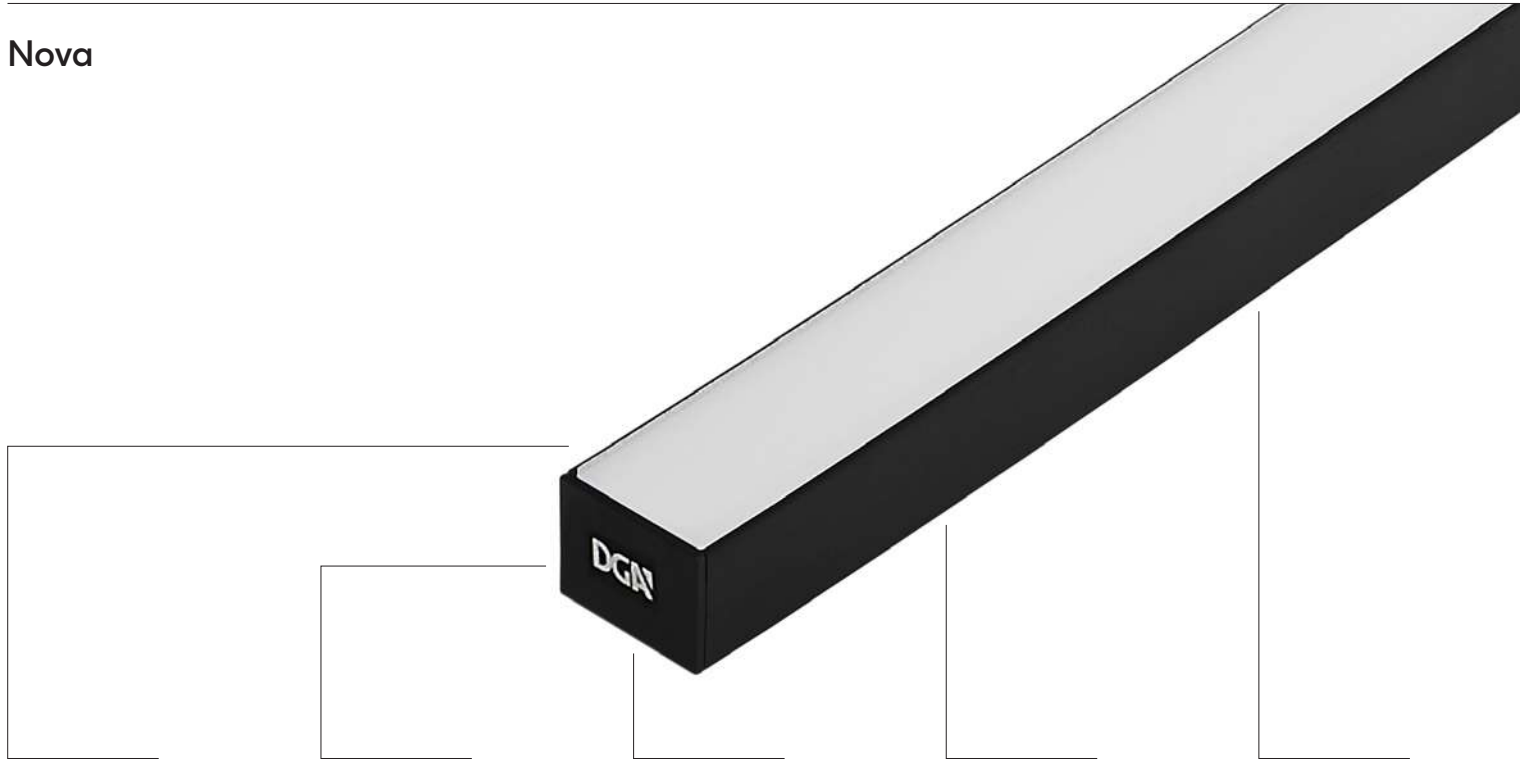


COVER



LOP
Light Opal Cover
20%




MLK
Milky Cover
32%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum




T
Transparent

EXIT CABLE



A
Cap Exit Left




AB
In&Out Cap Exit



B
Cap Exit Right



C
Left Side Exit




CD
In&Out Side Exit



D
Right Side Exit



E
Back Exit Left



EF
Back In&Out Exit



F
Back Exit Right

LED POSITION



X
Symmetric




Y
Asymmetric




Z
Double Asymmetric


FIXING ELEMENTS




M
Magnetic Fixing




B
Double Sided Tape



P
Adjustable Bracket



C
Mounting Clip



Nova


Lumen Output 3000K CRI > 90
30W/m - Light Opal Cover - Finish Gray: 2300 lm/m

CODE
LPAD- [] - [] - [] - [] - [] - [] - []

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	LED POSITION	FIXING	FINISH	CCT
LED POSITION X-Y	004 007 010 013 016	LOP Light Opal Cover	A Aluminum	A Cap Exit Left	X Symmetric	M Magnetic Fixing	● 4 Black	● U 2200K
08 8W/m	019 022 025 028 031	MLK Milky Cover	T Transparent	AB In&Out Cap Exit	Y Asymmetric	B Double Sided Tape	● 3 Gray	● Q 2500K
12 12W/m	034 037 040 043 046	BLK Black Ghost Cover		B Cap Exit Right	Z Double Asymmetric	P Adjustable Bracket		● X 2700K CRI > 90
16 16W/m	049 052 055 058 061			C Left Side Exit		C Mounting Clip		● W 3000K CRI > 90
19 19W/m	064 067 070 073 076			CD In&Out Side Exit				● K 3500K CRI > 90
23 23W/m	079 082 085 088 091			D Right Side Exit				● D 4000K CRI > 90
	094 097 100 103 106			E Back Exit Left				
LED POSITION Z	109 112 115 118 121			EF Back In&Out Exit				
16 16W/m	124 127 130 133 136			F Back Exit Right				
24 24W/m	139 142 145 148 151							
30 30W/m	154 157 160 163 166							
	169 172 175 178 181							
	184 187 190 193 196							
	199 202 205 208 211							
	214 217 220 223 226							
	229 232 235 238 241							
	244 247 250 253 256							
	259 262 265 268 271							
	274 277 280 283 286							
	289 292 295 298							

Custom lengths upon request

FIXING

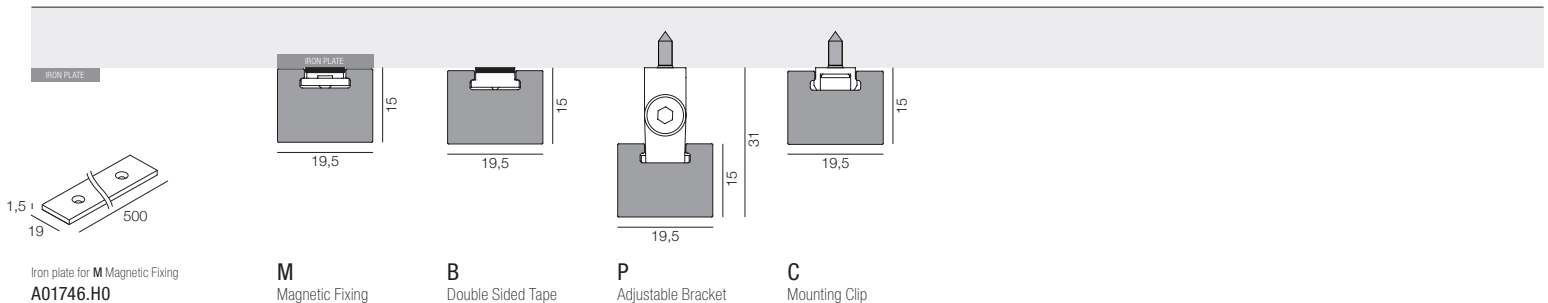

SUGGESTED DRIVERS (not included)

Linear with Lenses

ILLUMINAZIONE EFFICIENTE E CONTROLLATA


I profili lineari con lenti rappresentano una soluzione innovativa per l'illuminazione architettonica e retail, combinando alte prestazioni e un design compatto. Grazie all'impiego di ottiche personalizzate, questi apparecchi assicurano un controllo preciso della luce, garantendo una distribuzione omogenea ed efficiente anche in ambienti complessi o di dimensioni contenute. Le diverse varianti di fascio soddisfano esigenze progettuali sofisticate.

EFFICIENT AND CONTROLLED LIGHTING


Linear profiles with lenses represent an innovative solution for architectural and retail lighting, combining high performance with a compact design. Thanks to the use of customized optics, these products ensure precise light control, providing homogeneous and efficient distribution even in complex or small spaces. The different beam variants meet sophisticated design requirements.




Q8 Lenti

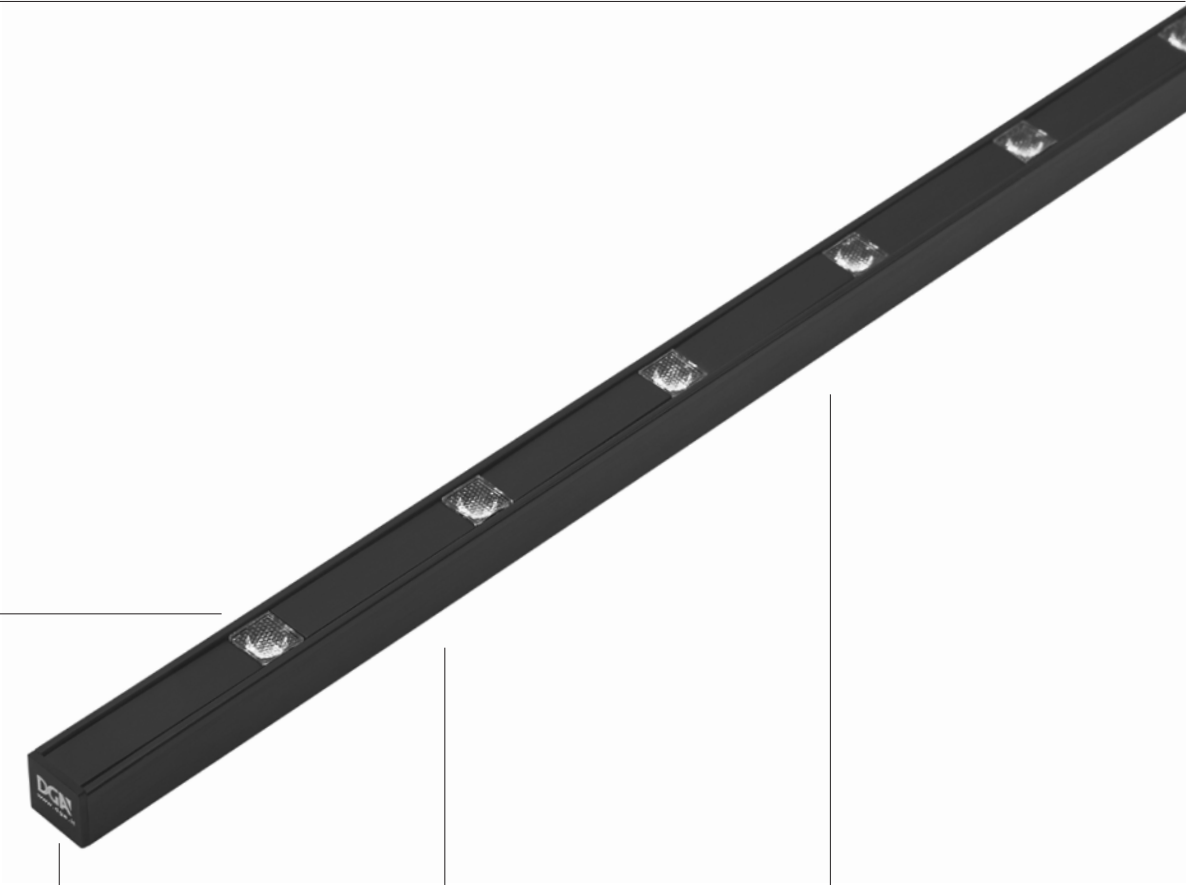


LENS

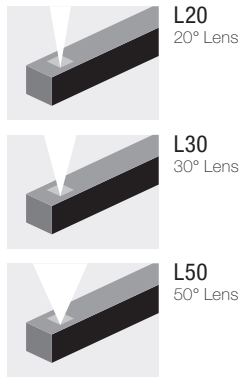


END CAP





EXIT CABLE


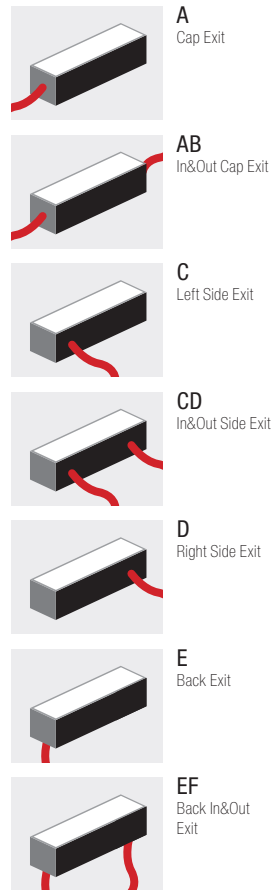


FIXING

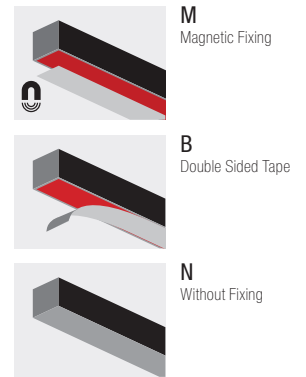

FIXING

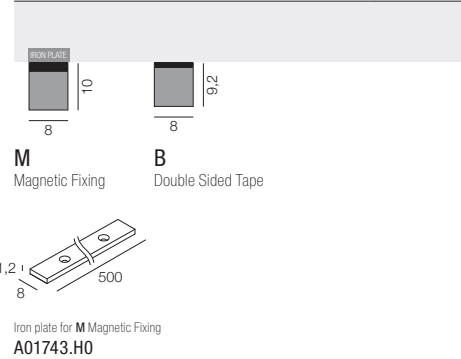



Q8 Lenti

Lumen Output 3000K CRI > 90
25W/m - 20° Lens - Finish Black: 1600 lm/m

CODE
LC8L - 25 - [] - [] - A - [] - []

POWER	LENGTH (cm)	LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
25 25W/m	010 019 028 037 046 055 064 073 082 091	L20 20° Lens	A Aluminum	A Cap Exit AB In&Out Cap Exit C Left Side Exit CD In&Out Side Exit D Right Side Exit E Back Exit EF Back In&Out Exit	M Magnetic Fixing B Double Sided Tape N Without Fixing	● 4 Black ● 3 Gray	● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90
	100 109 118 127 136 145 154 163 172 181	L30 30° Lens					
	190	L50 50° Lens					

Custom lengths upon request

ACCESSORIES (only for N without fixing)

IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
1,5 14 500	16 11 10 16	14 11 10 14	11 10 11 25
Iron plate for Magnetic Bracket A01744.H0	Magnetic brackets 0° A00534._0	Bracket with screw 0° A00529._0	Mounting clip A00706._0
	14,5 10 14,5	14,5 10 21	
	Magnetic brackets 45° A01755._0	Bracket with screw 45° A00845._0	


SUGGESTED DRIVERS (not included)

12Vdc CV70-F-12-N p. 290


Armonia Lenti




LENS

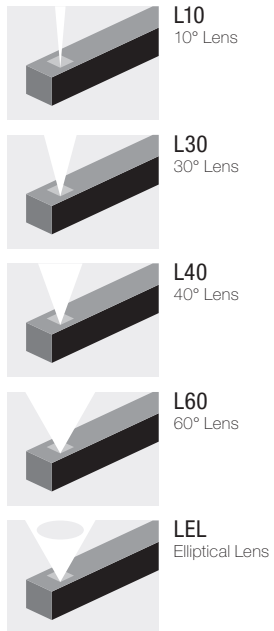


END CAP





EXIT CABLE

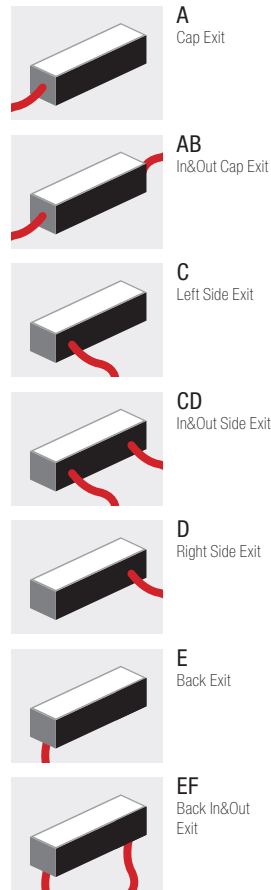


FIXING

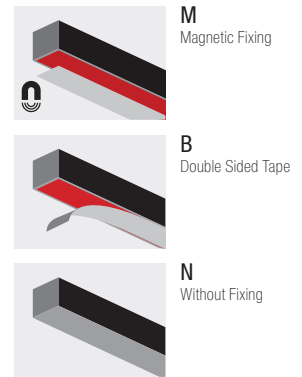

FIXING



Iron plate for M Magnetic Fixing
A01744.H0



Armonia Lenti

Lumen Output 3000K CRI > 90
24W/m - 10° Lens - Finish Black: 1600 lm/m

CODE
LAL1 - [] - [] - [] - A - [] - [] - []

POWER	LENGTH (cm)	LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
12	017 (2 LED)	L10 10° Lens	A Aluminum	A Cap Exit	M Magnetic Fixing	● 4 Black	● U 2200K
24	033 (4 LED)	L30 30° Lens		AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● X 2700K CRI > 90
	048 (6 LED)	L40 40° Lens		C Left Side Exit	N Without Fixing		● W 3000K CRI > 90
	064 (8 LED)	L60 60° Lens		CD In&Out Side Exit			● K 3500K CRI > 90
	080 (10 LED)	LEL Elliptical Lens		D Right Side Exit			● D 4000K CRI > 90
	096 (12 LED)			E Back Exit			
	112 (14 LED)			EF Back In&Out Exit			
	128 (16 LED)						
	144 (18 LED)						
	160 (20 LED)						

Custom lengths upon request

ACCESSORIES (only for N without fixing)

IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
1,5 19 500	13 19 19	13 22 33	17 13 25
Iron plate for Magnetic Bracket A01746.H0	Magnetic brackets 0° A00533._ 0	Bracket with screw 0° A00494._ 0	Mounting clip A00705._ 0
	Magnetic brackets 45° A01754._ 0	Bracket with screw 20° A00491._ 0	
		Bracket with screw 30° A00492._ 0	
		Bracket with screw 45° A00493._ 0	
		Bracket with screw 60° A00495._ 0	


SUGGESTED DRIVERS (not included)

350mA	CC50-F-350-N	p. 282
700mA	CC50-F-700-N	p. 286


Armonia Louver




LENS

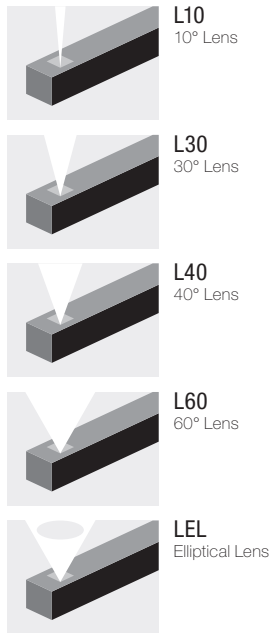


END CAP




EXIT CABLE

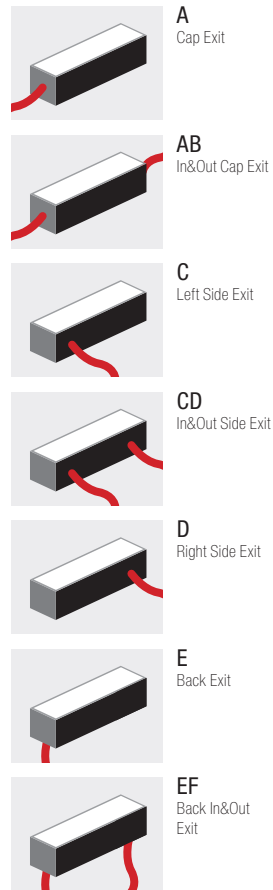


FIXING

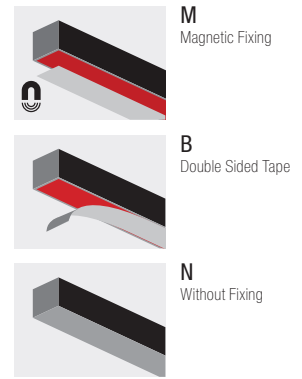


FIXING

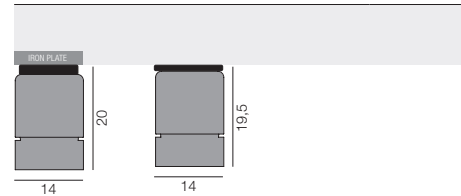

M Magnetic Fixing
B Double Sided Tape



Iron plate for **M** Magnetic Fixing
A01744.H0





Armonia Louver

Lumen Output 3000K CRI > 90
26W/m - 10° Lens - Finish Black: 2100 lm/m

CODE
LAL2- 26 - [] - [] - A - [] - []

POWER	LENGTH (cm)	LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
26 26W/m	015 030 045 060 075 090 105 120 135 150 165 180 195 210 225 240 255 270 285 300 <small>Custom lengths upon request</small>	L10 10° Lens L30 30° Lens L40 40° Lens L60 60° Lens LEL Elliptical Lens	A Aluminum	A Cap Exit AB In&Out Cap Exit C Left Side Exit CD In&Out Side Exit D Right Side Exit E Back Exit EF Back In&Out Exit	M Magnetic Fixing B Double Sided Tape N Without Fixing	● 4 Black ● 3 Gray	● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90



Armonia Louver Dimmable


Lumen Output 3000K CRI > 90
36W/m - 10° Lens - Finish Black: 1350 lm/m

CODE
LALD- 36 - [] - [] - A - [] - []

POWER	LENGTH (cm)	LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
36 36W/m	017 034 051 068 085 102 119 136 153 170 187 204 221 238 255 270 289 <small>Custom lengths upon request</small>	L10 10° Lens L30 30° Lens L40 40° Lens L60 60° Lens LEL Elliptical Lens	A Aluminum	A Cap Exit AB In&Out Cap Exit C Left Side Exit CD In&Out Side Exit D Right Side Exit E Back Exit EF Back In&Out Exit	M Magnetic Fixing B Double Sided Tape N Without Fixing	● 4 Black ● 3 Gray	● U 2200K ● X 2700K CRI > 90 ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90


ACCESSORIES (only for N without fixing)

IRON PLATE




Iron plate for Magnetic Bracket
A01746.H0

MAGNETIC BRACKETS



Magnetic brackets 0°
A01338._0

BRACKETS WITH SCREWS



Bracket with screw 0°
A01339._0


SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N p. 292


Armonia Mix




COVER

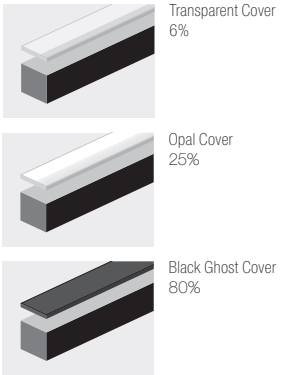


END CAP





EXIT CABLE

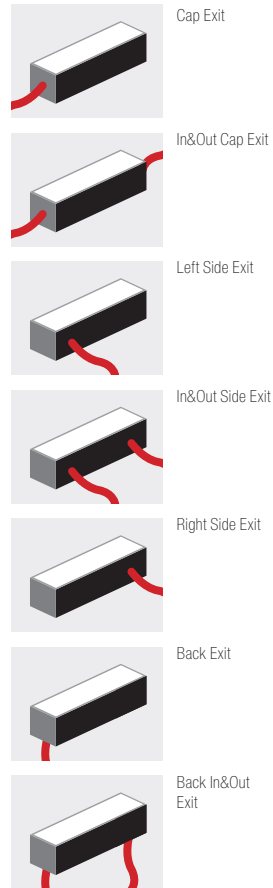

FIXING

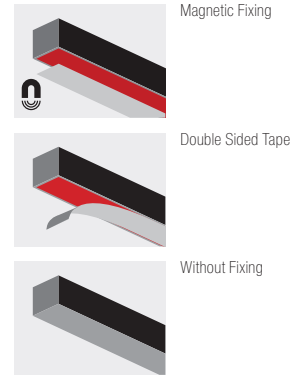

FIXING

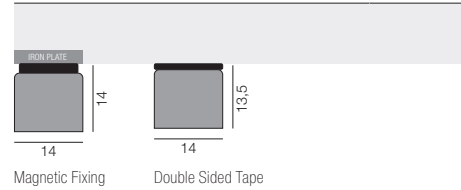

Armonia Mix

Design your own light with the configurable modules

Module with lenses - Module with lenses and snoot

POWER LED	OPTIC	FINISH	CCT
4W 24Vdc - 400 lm output	10° Lens	● 4 Black	● X 2700K CRI > 90
	30° Lens	● 3 Gray	● W 3000K CRI > 90
6W (Dimmable) 24Vdc - 400 lm output	40° Lens		● D 4000K CRI > 90
	60° Lens		
	Elliptical Lens		



MODULE WITH LENSES



MODULE WITH LENSES AND SNOOT

Diffuse light module

POWER LED	OPTIC	FINISH	CCT
8W/m	Opal Cover	● 4 Black	● U 2200K
12W/m		● 3 Gray	● Q 2500K
16W/m			● X 2700K CRI > 90
19W/m			● W 3000K CRI > 90
23W/m 24Vdc - 1220 lm/m			● K 3500K CRI > 90
			● D 4000K CRI > 90



Mini Tini module

POWER LED	OPTIC	FINISH	CCT
1W 24Vdc - 100 lm	10° Lens	● 4 Black	● U 2200K
	25° Lens	● 3 Gray	● X 2700K CRI > 90
2W 24Vdc - 150 lm	40° Lens		● W 3000K CRI > 90
	60° Lens		● 9 4000K
















Blind module

FINISH
● 4 Black
● 3 Gray



ACCESSORIES (only for N without fixing)

IRON PLATE	MAGNETIC BRACKETS	BRACKETS WITH SCREWS	MOUNTING CLIP
			
1.5 19 500	19 19	33 22	17 15
			
Iron plate for Magnetic Bracket A01746.H0	Magnetic brackets 0° A00533._0	Bracket with screw 0° A00494._0	Mounting clip A00705._0
			
	Magnetic brackets 45° A01754._0	Bracket with screw 20° A00491._0	
			
		Bracket with screw 30° A00492._0	
			
		Bracket with screw 45° A00493._0	
			
		Bracket with screw 60° A00495._0	


SUGGESTED DRIVERS (not included)

Continuum





IP40	24Vdc	1 m	370 g	2
			750 g	
			1120 g	
			1490 g	
			1860 g	
			2240 g	
			2690 g	

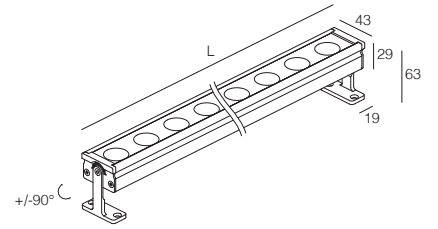

Continuum


24V	9W	18W	27W	36W	45W	54W	63W
Length	30 cm	60 cm	90 cm	120 cm	150 cm	180 cm	210 cm
10° Lens	733706...	733724...	733725...	733726...	733727...	733728...	733729...
25° Lens	763706...	763724...	763725...	763726...	763727...	763728...	763729...
40° Lens	743706...	743724...	743725...	743726...	743727...	743728...	743729...
60° Lens	753706...	753724...	753725...	753726...	753727...	753728...	753729...
Elliptical Lens	773706...	773724...	773725...	773726...	773727...	773728...	773729...

Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m

FINISH	CCT
● H Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K
	● 8 TUNABLE WHITE
	Available on some products only
	L max 180 cm



IP40	24Vdc	1 m	370 g	2
			750 g	
			1120 g	
			1490 g	
			1860 g	
			2240 g	
			2690 g	

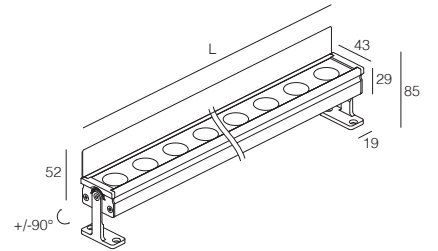

Continuum with visor

24V	9W	18W	27W	36W	45W	54W	63W
Length	30 cm	60 cm	90 cm	120 cm	150 cm	180 cm	210 cm
10° Lens	734235...	734229...	734230...	734231...	734232...	734233...	734234...
25° Lens	764235...	764229...	764230...	764231...	764232...	764233...	764234...
40° Lens	744235...	744229...	744230...	744231...	744232...	744233...	744234...
60° Lens	754235...	754229...	754230...	754231...	754232...	754233...	754234...
Elliptical Lens	774235...	774229...	774230...	774231...	774232...	774233...	774234...


Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m

FINISH	CCT
● H Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K
	● 8 TUNABLE WHITE
	Available on some products only
	L max 180 cm

Continuum IP67



IP67	WIPS	24Vdc	1 m	890 g	2
				1660 g	
				2440 g	
				3210 g	
				3980 g	



Continuum IP67


24V	9W	18W	27W	36W	45W
Length	30 cm	60 cm	90 cm	120 cm	150 cm
10° Lens	734319. __	734320. __	734321. __	734322. __	734323. __
25° Lens	7G4319. __	7G4320. __	7G4321. __	7G4322. __	7G4323. __
40° Lens	744319. __	744320. __	744321. __	744322. __	744323. __
60° Lens	754319. __	754320. __	754321. __	754322. __	754323. __
Elliptical Lens	774319. __	774320. __	774321. __	774322. __	774323. __

FINISH	CCT
● 4 Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K
	● 8 TUNABLE WHITE

Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m



IP67	WIPS	230V	1 m	1260 g	2
				2200 g	
				3040 g	
				3870 g	
				4700 g	



Continuum IP67 230V

220-240Vac	11W	21W	30W	40W	50W
Length	30 cm	60 cm	90 cm	120 cm	150 cm
10° Lens	734309. __	734310. __	734311. __	734312. __	734313. __
25° Lens	7G4309. __	7G4310. __	7G4311. __	7G4312. __	7G4313. __
40° Lens	744309. __	744310. __	744311. __	744312. __	744313. __
60° Lens	754309. __	754310. __	754311. __	754312. __	754313. __
Elliptical Lens	774309. __	774310. __	774311. __	774312. __	774313. __

FINISH	CCT
● 4 Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K

Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m

Continuum IP67 230V DALI

220-240Vac	11W	21W	30W	40W	50W
Length	30 cm	60 cm	90 cm	120 cm	150 cm
10° Lens	734314. __	734315. __	734316. __	734317. __	734318. __
25° Lens	7G4314. __	7G4315. __	7G4316. __	7G4317. __	7G4318. __
40° Lens	744314. __	744315. __	744316. __	744317. __	744318. __
60° Lens	754314. __	754315. __	754316. __	754317. __	754318. __
Elliptical Lens	774314. __	774315. __	774316. __	774317. __	774318. __

SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N p. 292
24Vdc TW CV100-L-24-NL p. 291

ACCESSORIES

Fixed bracket
A00949.40

Adjustable bracket H30
A00951.40

Adjustable bracket H50
A00952.40

Adjustable bracket H80
A00953.40

Watertight connector 24Vdc
A00357.40

Watertight connector 220-240Vac
A01023.40


Fixing plate (Only on Request)
Contact our sales department for more information

Continuum IP67 Louver





IP67	WIPS	24Vdc	1 m	920 g	1720 g	2520 g	3320 g	4120 g



Continuum IP67 Louver


24V	9W	18W	27W	36W	45W
Length 30 cm	30 cm	60 cm	90 cm	120 cm	150 cm
10° Lens	734395. __	734396. __	734397. __	734398. __	734399. __
25° Lens	764395. __	764396. __	764397. __	764398. __	764399. __
40° Lens	744395. __	744396. __	744397. __	744398. __	744399. __
60° Lens	754395. __	754396. __	754397. __	754398. __	754399. __
Elliptical Lens	774395. __	774396. __	774397. __	774398. __	774399. __

FINISH	CCT
● 4 Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K
	● 8 TUNABLE WHITE

Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m



IP67	WIPS	230V	1 m	1920 g	2260 g	3120 g	3980 g	4840 g



Continuum IP67 Louver 230V

220-240Vac	11W	21W	30W	40W	50W
Length 30 cm	30 cm	60 cm	90 cm	120 cm	150 cm
10° Lens	734385. __	734386. __	734387. __	734388. __	734389. __
25° Lens	764385. __	764386. __	764387. __	764388. __	764389. __
40° Lens	744385. __	744386. __	744387. __	744388. __	744389. __
60° Lens	754385. __	754386. __	754387. __	754388. __	754389. __
Elliptical Lens	774385. __	774386. __	774387. __	774388. __	774389. __

FINISH	CCT
● 4 Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K

Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m

Continuum IP67 Louver 230V DALI

220-240Vac	11W	21W	30W	40W	50W
Length 30 cm	30 cm	60 cm	90 cm	120 cm	150 cm
10° Lens	734390. __	734391. __	734392. __	734393. __	734394. __
25° Lens	764390. __	764391. __	764392. __	764393. __	764394. __
40° Lens	744390. __	744391. __	744392. __	744393. __	744394. __
60° Lens	754390. __	754391. __	754392. __	754393. __	754394. __
Elliptical Lens	774390. __	774391. __	774392. __	774393. __	774394. __

SUGGESTED DRIVERS (not included)

- 24Vdc CV70-F-24-N p. 292
- 24Vdc TW CV100-L-24-NL p. 291

ACCESSORIES

Fixed bracket A00949.40

Adjustable bracket H30 A00951.40

Adjustable bracket H50 A00952.40

Adjustable bracket H80 A00953.40

Watertight connector 24Vdc A00357.40

Watertight connector 220-240Vac A01023.40

Fixing plate (Only on Request)


Contact our sales department for more information

Continuum i IP67 Louver





IP67	WIPS	24V	IK 10	1 m	890 g	2
					1660 g	
					2440 g	
					3210 g	
					3980 g	



Continuum i IP67 Louver


Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m

24V	9W	18W	27W	36W
Length 30 cm	30 cm	60 cm	90 cm	120 cm
10° Lens	734462. __	734463. __	734464. __	734465. __
25° Lens	7G4462. __	7G4463. __	7G4464. __	7G4465. __
40° Lens	744462. __	744463. __	744464. __	744465. __
60° Lens	754462. __	754463. __	754464. __	754465. __
Elliptical Lens	774462. __	774463. __	774464. __	774465. __

FINISH	CCT
● 4 Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K
	● 8 TUNABLE WHITE



IP67	WIPS	230V	IK 10	1 m	1260 g	2
					2200 g	
					3040 g	
					3870 g	
					4700 g	



Continuum i IP67 Louver 230V

Lumen Output 3000K
30W/m - 10° Lens: 2500 lm/m

220-240Vac	11W	21W	30W	40W
Length 30 cm	30 cm	60 cm	90 cm	120 cm
10° Lens	734466. __	734467. __	734468. __	734469. __
25° Lens	7G4466. __	7G4467. __	7G4468. __	7G4469. __
40° Lens	744466. __	744467. __	744468. __	744469. __
60° Lens	754466. __	754467. __	754468. __	754469. __
Elliptical Lens	774466. __	774467. __	774468. __	774469. __

FINISH	CCT
● 4 Black	● U 2200K
	● Y 2700K
	● W 3000K CRI > 90
	● 6 3000K
	● 9 4000K


Continuum i IP67 Louver 230V DALI

220-240Vac	11W	21W	30W	40W
Length 30 cm	30 cm	60 cm	90 cm	120 cm
10° Lens	734470. __	734471. __	734472. __	734473. __
25° Lens	7G4470. __	7G4471. __	7G4472. __	7G4473. __
40° Lens	744470. __	744471. __	744472. __	744473. __
60° Lens	754470. __	754471. __	754472. __	754473. __
Elliptical Lens	774470. __	774471. __	774472. __	774473. __

SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N p. 292
24Vdc TW CV100-L-24-NL p. 291

ACCESSORIES

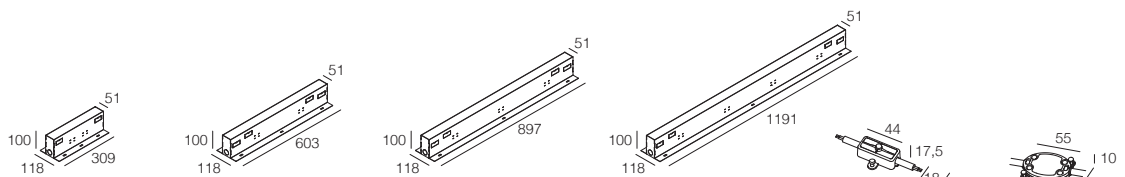

Recessed box for Continuum i IP67 Louver 24V
A01209.60
Recessed box for Continuum i IP67 Louver 230V
A01213.60

Recessed box L 30 cm
in Stainless Steel AISI 316L
A01210.60

Recessed box L 60 cm
in Stainless Steel AISI 316L
A01214.60

Recessed box L 90 cm
in Stainless Steel AISI 316L
A01215.60

Recessed box L 120 cm
in Stainless Steel AISI 316L
A01212.60















Watertight connector
24Vdc
A00357.40

Watertight connector
220-240Vac
A01023.40 p. 266

DGA

Ariel series: interchangeable accessories


 <p>Ariel Am Ø 60 9W - 13W</p>	 <p>Ariel AF Ø 40 9W - 13W</p>	 <p>Ariel mR Ø 90 9W - 13W</p>	 <p>Ariel RF Ø 76 9W - 13W</p>	 <p>Ariel In&Out m Ø 74 9W - 11W - 13W</p>	 <p>Ariel In&Out F Ø 57 9W - 11W - 13W</p>	 <p>Ariel Tilt 35 m Ø 85 9W - 13W</p>	 <p>Ariel Tilt 35 F Ø 68 9W - 13W</p>
 <p>Ariel i IP67 Solovetro Ø 59 9W - 9,5W</p>	 <p>Ariel i IP67 Ø 63 9W - 9,5W</p>	 <p>Ariel Ø 40x78 (84 P&P) 9W - 11W - 13W</p>	 <p>Ariel PN-m Ø 40x78 (84 P&P) 9W - 11W - 13W</p>	 <p>Ariel PN-F Ø 40x78 (84 P&P) 9W - 11W - 13W</p>	 <p>Ariel B Micro Ø 40x78 (84 P&P) 10W - 12W - 14W</p>	 <p>Ariel B Multi Ø 40x78 (84 P&P) 10W - 12W - 14W</p>	 <p>Ariel P IP67 Ø 49x114 9W - 9,5W - 13W</p>

Ariel interchangeable accessories	LENSES	OPTICAL FILTERS	DECORATIVE RINGS
	 14° Lens [1] A01599.80	 Elliptical Filter A01182.80	 Shiny Chrome A01272.10
	 18° Lens A01192.80	 Hex Louver [2] A01183.40	 Gold Chrome A01272.10
	 24° Lens A01193.80	 Prismatic Filter A01184.80	 Satin Gold A01272.80
	 33° Lens A01194.80	 Softening Lens A01185.80	 Satin Nickel A01272.N0
	 52° Lens A01195.80		 Black A01272.40









Plug&Play System















Ariel P&P modules
14W max
14° lens

Ariel P&P modules
14W max
18° - 24° - 33° - 52° lens

 <p>Modulo 2200K CRI > 90 A01475.4U1</p>	 <p>Modulo 2200K CRI > 90 A01474.4U1</p>
<p>Modulo 2400K CRI > 90 A01475.4B2</p>	<p>Modulo 2400K CRI > 90 A01474.4B2</p>
<p>Modulo 2700K CRI > 90 A01475.4X</p>	<p>Modulo 2700K CRI > 90 A01474.4X</p>
<p>Modulo 2700K CRI > 95 A01475.4X1</p>	<p>Modulo 2700K CRI > 95 A01474.4X1</p>
<p>Modulo 3000K CRI > 80 A01475.46</p>	<p>Modulo 3000K CRI > 80 A01474.46</p>
<p>Modulo 3000K CRI > 90 A01475.4W</p>	<p>Modulo 3000K CRI > 90 A01474.4W</p>
<p>Modulo 3000K CRI > 95 A01475.4W1</p>	<p>Modulo 3000K CRI > 95 A01474.4W1</p>
<p>Modulo 3500K CRI > 90 A01475.4K</p>	<p>Modulo 3500K CRI > 90 A01474.4K</p>
<p>Modulo 3500K CRI > 95 A01475.4K1</p>	<p>Modulo 3500K CRI > 95 A01474.4K1</p>
<p>Modulo 4000K CRI > 90 A01475.4D</p>	<p>Modulo 4000K CRI > 90 A01474.4D</p>





















Saturno series: interchangeable accessories

 <p>Saturno Am Ø 75 18W</p>	 <p>Saturno AF Ø 57 18W</p>	 <p>Saturno mR Ø 110 18W</p>	 <p>Saturno RF Ø 92 18W</p>	 <p>Saturno In&Out m Ø 95 18W</p>	 <p>Saturno In&Out F Ø 74 18W</p>	 <p>Saturno Tilt 35 m Ø 105 18W</p>	 <p>Saturno Tilt 35 F Ø 85 18W</p>
 <p>Saturno i IP67 Solovetro Ø 80 12W - 14W</p>	 <p>Saturno i IP67 Ø 85 12W - 14W</p>	 <p>Saturno Ø 55x119 (108 P&P) 18W</p>	 <p>Saturno PN-m Ø 55x119 (108 P&P) 18W</p>	 <p>Saturno PN-F Ø 55x119 (108 P&P) 18W</p>	 <p>Saturno B Multi Ø 55x119 (108 P&P) 19W</p>	 <p>Saturno B Saturno BF Ø 55-118 (108 P&P) 20W - 25W</p>	 <p>Saturno P IP67 Ø 62x140 12W - 14W - 18W</p>

LENSSES	OPTICAL FILTERS	DECORATIVE RINGS
 <p>12° Lens [1] A01202.80</p>	 <p>Elliptical Filter A01186.80</p>	 <p>Shiny Chrome A01273.10</p>
 <p>18° Lens A01196.80</p>	 <p>Hex Louver [2] A01187.40</p>	 <p>Gold Chrome A01273.10</p>
 <p>24° Lens A01197.80</p>	 <p>Prismatic Filter A01188.80</p>	 <p>Satin Gold A01273.80</p>
 <p>33° Lens A01198.80</p>	 <p>Softening Lens A01189.80</p>	 <p>Satin Nickel A01273.N0</p>
 <p>52° Lens A01199.80</p>		 <p>Black A01273.40</p>

Saturno interchangeable accessories

[1] 12° Lens only for Plug&Play module
[2] Not available for Solovetro series

Plug&Play System	Saturno P&P modules 25W max 12° lens	Saturno P&P modules 25W max 18° - 24° - 33° - 52° lens
	 <p>Modulo 2200K CRI > 90 A01473.4U1</p>	 <p>Modulo 2200K CRI > 90 A01472.4U1</p>
	 <p>Modulo 2400K CRI > 90 A01473.4B2</p>	 <p>Modulo 2400K CRI > 90 A01472.4B2</p>
	 <p>Modulo 2700K CRI > 90 A01473.4X</p>	 <p>Modulo 2700K CRI > 90 A01472.4X</p>
	 <p>Modulo 2700K CRI > 95 A01473.4X1</p>	 <p>Modulo 2700K CRI > 95 A01472.4X1</p>
	 <p>Modulo 3000K CRI > 80 A01473.46</p>	 <p>Modulo 3000K CRI > 80 A01472.46</p>
	 <p>Modulo 3000K CRI > 90 A01473.4W</p>	 <p>Modulo 3000K CRI > 90 A01472.4W</p>
	 <p>Modulo 3000K CRI > 95 A01473.4W1</p>	 <p>Modulo 3000K CRI > 95 A01472.4W1</p>
	 <p>Modulo 3500K CRI > 90 A01473.4K</p>	 <p>Modulo 3500K CRI > 90 A01472.4K</p>
	 <p>Modulo 3500K CRI > 95 A01473.4K1</p>	 <p>Modulo 3500K CRI > 95 A01472.4K1</p>
	 <p>Modulo 4000K CRI > 90 A01473.4D</p>	 <p>Modulo 4000K CRI > 90 A01472.4D</p>

Marte series: interchangeable accessories



76
Marte Am

Ø 114

31W



77
Marte AF

Ø 90

31W



120
Marte B

Ø 91-146 (175 P&P)

35W - 42W

Marte interchangeable accessories

LENSES



22° Lens
A01681.80



26° Lens
A01682.80



38° Lens
A01683.80



60° Lens
A01684.80

OPTICAL FILTERS



Elliptical Filter
A01685.80



Hex Louver
A01686.80



Prismatic Filter
A01687.80



Softening Lens
A01688.80

● Plug&Play System

Marte P&P modules

42W max
22° - 26° - 38° - 60° lens



Modulo 2200K
CRI > 90
A01652.4U1

Modulo 2400K
CRI > 90
A01652.4B2

Modulo 2700K
CRI > 90
A01652.4X

Modulo 2700K
CRI > 95
A01652.4X1

Modulo 3000K
CRI > 80
A01652.46

Modulo 3000K
CRI > 90
A01652.4W

Modulo 3000K
CRI > 95
A01652.4W1





Modulo 3500K
CRI > 90
A01652.4K



















Modulo 3500K
CRI > 95
A01652.4K1

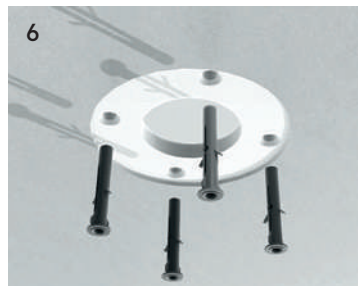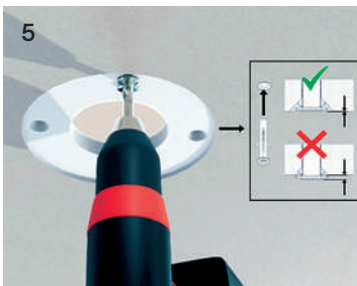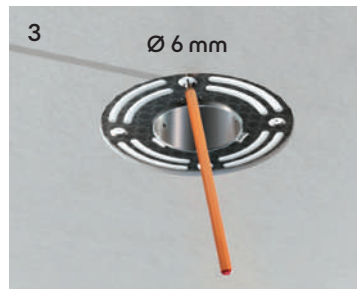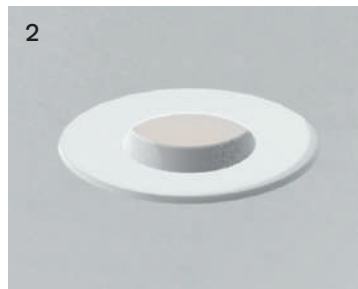



















Modulo 4000K
CRI > 90
A01652.4D

Frame for trimless downlights










Video installazione
Installation video






PRODUCT	FIXING FRAME CODE	HOLE SAW CODE
Tono AF p. 35 Ariel AF p. 43 Ariel AF WW p. 44	A00861.30 	A00832.H0 CUT-OUT  Ø 50
Ariel AF P&P p. 43	A01589.30 	A00832.H0 CUT-OUT  Ø 50
Ariel AF IP55 WW p. 44 Ariel AF IP55 p. 45	A01342.30 	A00832.H0 CUT-OUT  Ø 50
Tono Super AF p. 36	A00655.30 	A00832.H0 CUT-OUT  Ø 50
Tono RF p. 38 Ariel RF p. 49 Ariel RF WW p. 50 Ariel RF IP55 WW p. 50 Ariel RF IP55 p. 51	A00656.30 	A00833.H0 CUT-OUT  Ø 86
Ariel RF P&P p. 49	A01591.30 	A00833.H0 CUT-OUT  Ø 86
Tono In&Out F p. 39 Ariel In&Out F p. 55 Ariel In&Out F WW p. 56 Ariel In&Out F IP55 WW p. 56 Ariel In&Out F IP55 p. 57	A00654.40 Black A00654.30 Gray 	A00830.H0 CUT-OUT  Ø 64
Ariel In&Out F P&P p. 55	A01593.40 Black A01593.30 Gray 	A00830.H0 CUT-OUT  Ø 64
Ariel Tilt 35 F p. 57	A01677.30 	A00833.H0 CUT-OUT  Ø 86



PRODUCT	FIXING FRAME CODE	HOLE SAW CODE
Saturno AF p. 61 Saturno AF WW p. 62 Saturno AF IP55 WW p. 62 Saturno AF IP55 p. 63	A01234.30 	A00830.H0 CUT-OUT  Ø 64
Saturno AF P&P p. 61	A01614.30 	A00830.H0 CUT-OUT  Ø 64
Saturno RF p. 67 Saturno RF WW p. 68 Saturno RF IP55 WW p. 68 Saturno RF IP55 p. 69	A01236.30 	A01258.H0 CUT-OUT  Ø 104
Saturno RF P&P p. 67	A01615.30 	A01258.H0 CUT-OUT  Ø 104
Saturno In&Out F p. 73 Saturno In&Out F WW p. 74 Saturno In&Out F IP55 WW p. 74 Saturno In&Out F IP55 p. 75	A01238.40 Black A01238.30 Gray 	A00833.H0 CUT-OUT  Ø 104
Saturno In&Out F P&P p. 73	A01617.40 Black A01617.30 Gray 	A00833.H0 CUT-OUT  Ø 86
Saturno Tilt 35 F p. 75	A01679.30 	A01258.H0 CUT-OUT  Ø 102
Marte AF p. 77	A01648.30 	A01258.H0 CUT-OUT  Ø 104
Marte AF P&P p. 77	A01650.40 	A01258.H0 CUT-OUT  Ø 104
Luna F p. 84 Lunare F p. 86	A01636.30 	A00830.H0 CUT-OUT  Ø 64

Watertight connectors IP68

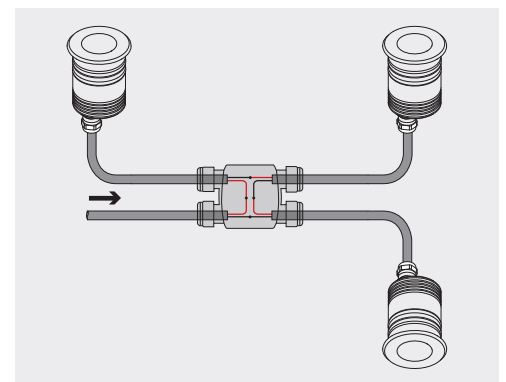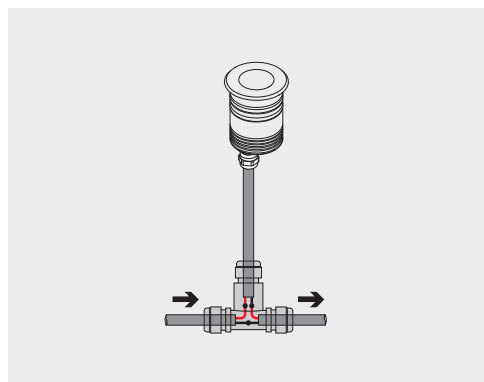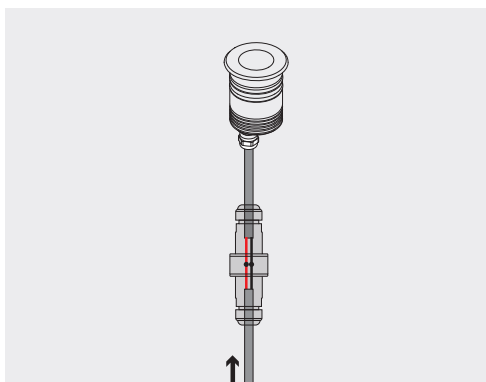
	CODE	DESCRIPTION
	A00357.40	Connettore stagno IP68 MICRO per cavo Ø 4 a 6 mm 2 poli Micro Watertight connector IP68 for 2 poles cable Ø 4 mm ÷ Ø 6mm
	A00387.40	Connettore stagno IP68 per cavo Ø 6 a 8 mm 2 poli Watertight connector IP68 for 2 poles cable Ø 6 mm ÷ Ø 8mm
	A01023.40	Connettore stagno IP68 per cavo Ø 5 a 7 mm 3 poli Watertight connector IP68 for 3 poles cable Ø 5 mm ÷ Ø 7mm
	A01651.40	Connettore stagno IP68 per cavi Ø 8 a 10 mm 4 poli Watertight connector IP68 for 4 poles cable Ø 8 mm ÷ Ø 10mm
	A01728.40	Connettore stagno IP68 per cavo linea Ø 7,5 a 9 mm e derivazione Ø 5,5 a 7 per collegamento in serie Watertight connector IP68 for line cable Ø 7.5 ÷ 9 mm and branch Ø 5.5 ÷ 7 for series connection
	A01729.40	Connettore stagno IP68 per cavo linea Ø 7,5 a 9 mm e derivazione Ø 5,5 a 7 per collegamento in parallelo Watertight connector IP68 for line cable Ø 7.5 ÷ 9 mm and branch Ø 5.5 ÷ 7 for parallel connection
	A01732.40	Connettore lineare IP68 per cavi 2-3 poli Ø 5,4 a 9 mm Linear connector IP68 for 2-3 pole cables Ø5.4 ÷ Ø9 mm
	A01733.40	Connettore a T IP68 per cavi 2-3 poli Ø 5,4 a 9 mm T connector IP68 for 2-3 pole cables Ø 5.4 mm ÷ Ø 9 mm
	A01089.40	Scatola di derivazione IP68 a 4 ingressi con morsetto interno 5 poli per cavi Ø 6-12 mm Junction box IP68 for cable Ø 6 mm ÷ Ø 12 mm





Electric cables

	CODE	DESCRIPTION	LENGTH	PROTECTION
<p>Per prodotti in tensione 12-24Vdc con codetta alimentazione a innesto rapido</p> <p>To be used with 12-24Vdc LED fixtures supplied with quick connector cable</p> 	A00108.00	Cavo d'alimentazione con connettore a innesto rapido Cable with quick connector	1,5 m	IP20-40
	A00111.00	Cavo d'alimentazione con connettore a innesto rapido Cable with quick connector	3,5 m	IP20-40
	A00112.00	Cavo d'alimentazione con connettore a innesto rapido Cable with quick connector	5 m	IP20-40
	A00691.00	Prolunga con conduttori twistati rosso/nero Extension cable with red/black twisted conductors	2 m	IP20-40
	A00694.00	Prolunga con conduttori twistati rosso/nero Extension cable with red/black twisted conductors	5 m	IP20-40
	A00699.00	Prolunga con conduttori twistati rosso/nero Extension cable with red/black twisted conductors	10 m	IP20-40

Recessed-boxes for cement/brickwork



















	CODE	DESCRIPTION	CUT-OUT
 	A00880.00	Scatola da incasso muratura 502E per Piegia 80 Recessed-box for cement/brickwork 502E for Piegia 80	 72x72 mm
 	A00882.00	Scatola da incasso muratura 503E per Piegia 140 Recessed-box for cement/brickwork 503E for Piegia 140	 75x108 mm

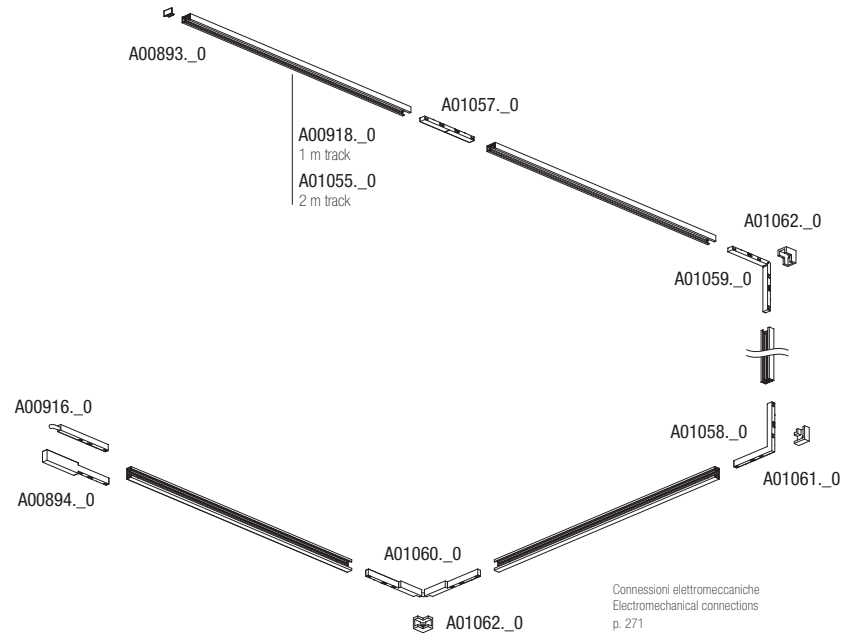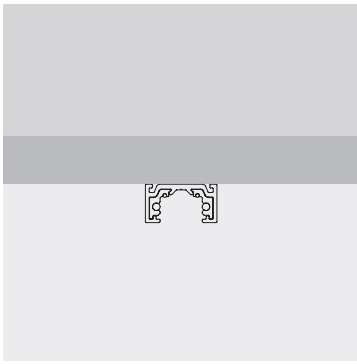Micro Tracks



Connessioni elettromeccaniche
Electromechanical connections
p. 271

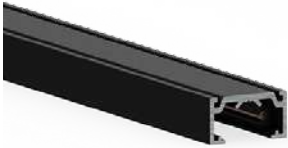

Installazione da superficie Surface installation

DESCRIPTION	CODE	FINISH
  <p>Binario da superficie Micro 24-48Vdc L = 1 m 24-48Vdc surface-mounted Micro track L = 1 m</p>	A00918_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  <p>Binario da superficie Micro 24-48Vdc L = 2 m 24-48Vdc surface-mounted Micro track L = 2 m</p>	A01055_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  <p>Tappo di chiusura per binario da superficie Micro Closure cap for surface-mounted Micro track</p>	A00893_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  <p>Binario da superficie Micro con film estetico 24-48Vdc L = 0,99 m 24-48Vdc surface-mounted Micro track with film L = 0,99 m</p>	A01694_0	<ul style="list-style-type: none"> ● CH Champagne ● TT Titanium ● SV Silver
  <p>Binario da superficie Micro con film estetico 24-48Vdc L = 1,99 m 24-48Vdc surface-mounted Micro track with film L = 1,99 m</p>	A01695_0	<ul style="list-style-type: none"> ● CH Champagne ● TT Titanium ● SV Silver
  <p>Tappo di chiusura per binario da superficie Micro con film estetico Closure cap for surface-mounted Micro track with film</p>	A01740.40	<ul style="list-style-type: none"> ● 4 Black
  <p>Giunto estetico a L per binari Micro L cover for surface-mounted Micro track</p>	A01061_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  <p>Giunto estetico a soffitto-parete per binari Micro L ceiling-wall cover for surface-mounted Micro track</p>	A01062_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  <p>Cover di chiusura estetica L = 3 m per binario da superficie Micro L = 3 m cover for surface-mounted Micro track</p>	A01498_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
 <p>Pinza per bloccaggio PVC in caso di taglio binari Micro Locking tool for PVC to be used in case of Micro track cutting</p>	A01069.00	

EXAMPLE CODE COMPOSITION


123456_0
FINISH

Micro Tracks

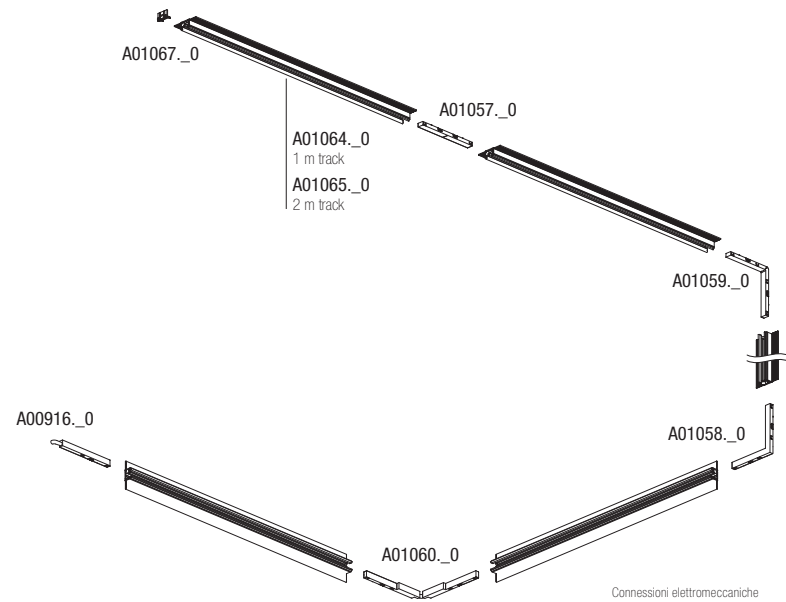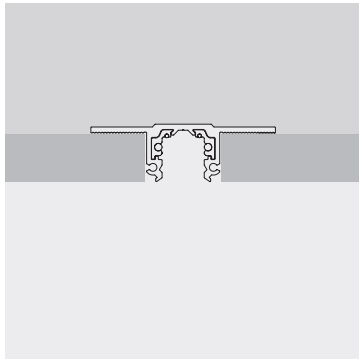

Connessioni elettromeccaniche
Electromechanical connections
p. 271

Installazione a filo Trimless installation



DESCRIPTION

CODE

FINISH

Binario da incasso a filo Micro 24-48Vdc L = 1 m
24-48Vdc trimless Micro track L = 1 m

A01064_0

● 4 Black
○ B White

Binario da incasso a filo Micro 24-48Vdc L = 2 m
24-48Vdc trimless Micro track L = 2 m


A01065_0

● 4 Black
○ B White

Tappo di chiusura per binario da incasso a filo Micro
Closure cap for trimless Micro track

A01067_0

● 4 Black
○ B White



Cover di chiusura estetica L = 3 m per binario Micro
da incasso e sospensione
L = 3 m cover for trimless and suspended Micro track

A01346_0



● 4 Black
○ B White

Pinza per bloccaggio PVC in caso di taglio binari Micro
Locking tool for PVC to be used in case of Micro track cutting

A01069.00





Micro Tracks

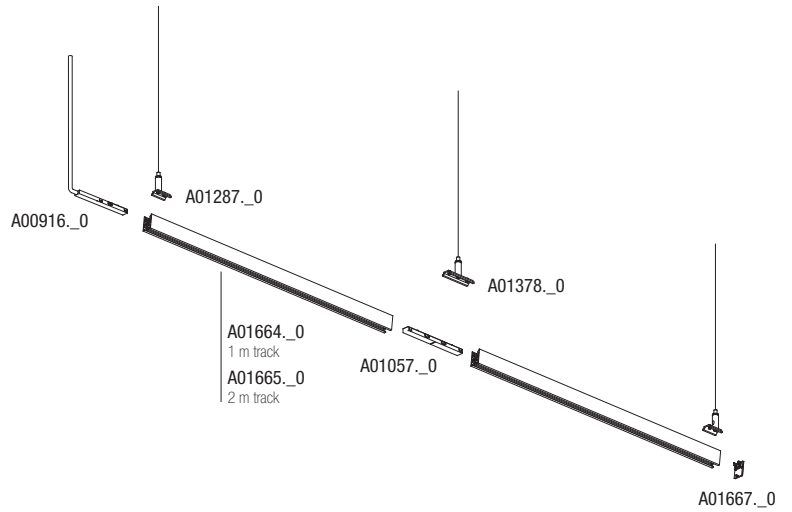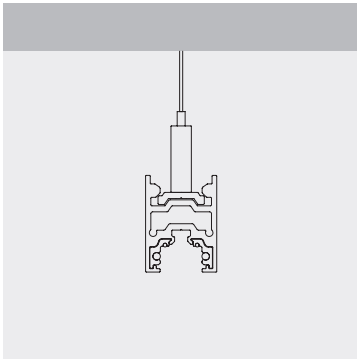


Connessioni elettromeccaniche
Electromechanical connections
p. 271

Installazione a sospensione Pendant installation





DESCRIPTION	CODE	FINISH
Binario a sospensione Micro 24-48Vdc L = 1 m 24-48Vdc suspended Micro track L = 1 m	A01664_0	● 4 Black ○ B White



Binario a sospensione Micro 24-48Vdc L = 2 m 24-48Vdc suspended Micro track L = 2 m	A01665_0	● 4 Black ○ B White
Tappo di chiusura per binario a sospensione a filo Micro Closure cap for suspended Micro track	A01667_0	● 4 Black ○ B White



Cover di chiusura estetica L = 3 m per binario Micro da incasso e sospensione L = 3 m cover for trimless and suspended Micro track	A01346_0	● 4 Black ○ B White
---	----------	------------------------



Kit di sospensione L = 1,5 m con staffa corta per binari Micro Suspension kit L = 1.5 m with short bracket for Micro track	A01287_0	● 4 Black ○ B White
Kit di sospensione L = 1,5 m con staffa lunga in caso di giunzione in linea di binari Micro Suspension kit L = 1.5 m with long bracket for inline connection of Micro tracks	A01378_0	● 4 Black ○ B White




















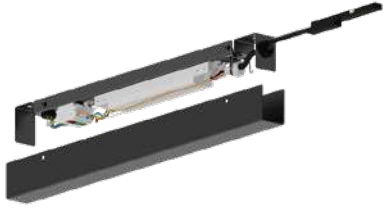



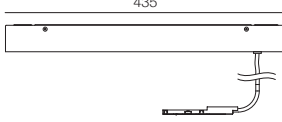



Si consiglia di mantenere una distanza massima di L = 0,9 m tra un kit di sospensione e l'altro
It is recommended to maintain a maximum distance of L = 0.9 m between each suspension kit





Pinza per bloccaggio PVC in caso di taglio binari Micro Locking tool for PVC to be used in case of Micro track cutting	A01069.00	
---	-----------	--

Connessioni elettromeccaniche

Electromechanical connections


INSTALLATION	DESCRIPTION	CODE	FINISH
  	<p>Testata di alimentazione per binario da superficie Micro 24-48Vdc End feed for surface-mounted 24-48Vdc Micro tracks</p>	A00894_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Testata di alimentazione a scomparsa con cavo 2,5 m nero per binari Micro 24-48Vdc Recessed end feed with 2,5 m black cable for 24-48Vdc Micro tracks</p>	A00916_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Giunto passante per binari Micro 24-48Vdc Joint for 24-48Vdc Micro tracks</p>	A01057_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Giunto a L per binari Micro 24-48Vdc L electrical joint for 24-48Vdc Micro tracks</p>	A01058_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Giunto a L soffitto-parete per binari Micro 24-48Vdc L ceiling-wall electrical joint for 24-48Vdc Micro tracks</p>	A01059_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Giunto flessibile per binari Micro 24-48Vdc Flexible electrical joint for 24-48Vdc Micro tracks</p>	A01060_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Box alimentazione con driver integrato per binari Micro (in 230Vac out 48Vdc 100W max) Box with built-in power supply (in 230Vac out 48Vdc 100W max) for Micro tracks</p>	A01561_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Box di alimentazione con driver integrato per binari a sospensione Micro (in 230Vac out 48Vdc 100W max) con cavo nero L = 2 m Box with built-in power supply (in 230Vac out 48Vdc 100W max) for suspended Micro tracks with black cable L = 2 m</p>	A01674_0	<ul style="list-style-type: none"> ● 4 Black ○ B White
  	<p>Dispositivo per optoisolamento segnale BUS DALI Rigenerazione del segnale DATI BUS bidirezionale Protezione contro i picchi di tensione in ingresso e uscita Alimentazione in tensione 24-48Vdc OUT 10A max (450W-48Vdc ... 210W-24Vdc) BUS DALI coupler. Regeneration of the bi-directional BUS DATA Protected against input and output voltage peaks Driver 24-48Vdc OUT 10A max (450W-48Vdc ... 210W-24Vdc)</p>	DPS-DA-SRP-NH	

Multi Tracks

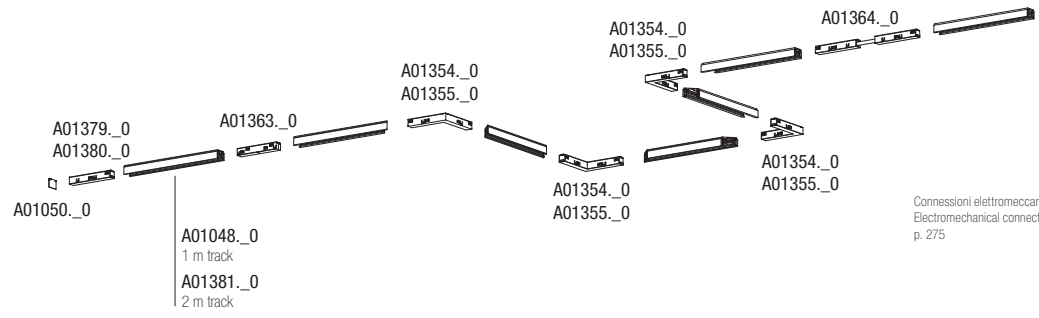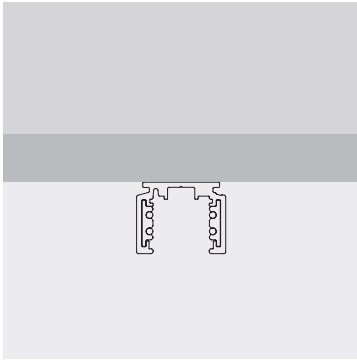



Connessioni elettromeccaniche
Electromechanical connections
p. 275

Installazione da superficie Surface installation




DESCRIPTION	CODE	FINISH
Binario da superficie Multi 24-48Vdc L = 1 m 24-48vdc surface-mounted Multi track L = 1 m	A01048._0	● 4 Black ○ B White

Binario da superficie Multi 24-48Vdc L = 2 m 24-48vdc surface-mounted Multi track L = 2 m	A01381._0	● 4 Black ○ B White
--	-----------	------------------------



Tappo di chiusura per binario da superficie ed incasso a filo Multi Closure cap for surface-mounted and trimless Multi track	A01050._0	● 4 Black ○ B White
---	-----------	------------------------



Tappo di chiusura con foro per binario da superficie Multi Closure cap with hole for surface-mounted and trimless Multi track	A01387._0	● 4 Black ○ B White
--	-----------	------------------------





Cover di chiusura estetica L = 3 m per binari Multi L = 3 m cover for Multi track	A01319._0	● 4 Black ○ B White
--	-----------	------------------------




Pinza per attestatura conduttori in caso di taglio binari Multi e 230Vac Cutters for cutting Multi and 230Vac track conductors	A01362.00	
---	-----------	--






Multi Tracks

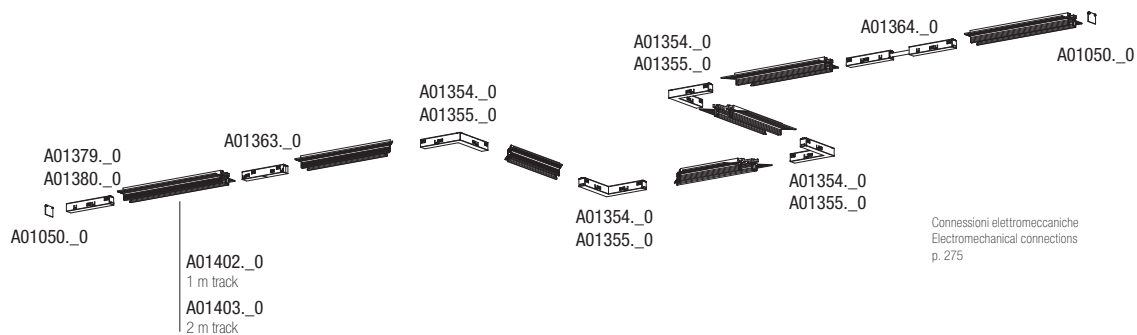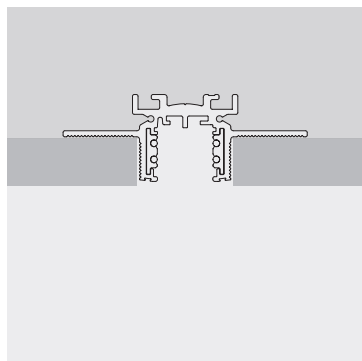



Installazione a filo Trimless installation



DESCRIPTION	CODE	FINISH
Binario da incasso a filo Multi 24-48Vdc L = 1 m 24-48vdc trimless Multi track L = 1 m	A01402._0	● 4 Black ○ B White
Binario da incasso a filo Multi 24-48Vdc L = 2 m 24-48vdc trimless Multi track L = 2 m	A01403._0	● 4 Black ○ B White
Tappo di chiusura per binario da superficie ed incasso a filo Multi Closure cap for surface-mounted and trimless Multi track	A01050._0	● 4 Black ○ B White
Tappo di chiusura con foro per binario da superficie Multi Closure cap with hole for surface-mounted and trimless Multi track	A01387._0	● 4 Black ○ B White
Cover di chiusura estetica L = 3 m per binari Multi L = 3 m cover for Multi tracks	A01319._0	● 4 Black ○ B White
Dima per posizionamento binari Multi Template for trimless fixing of Multi track	A01405.00	
Pinza per attestatura conduttori in caso di taglio binari Multi e 230Vac Cutters for cutting Multi and 230Vac track conductors	A01362.00	




Multi Tracks

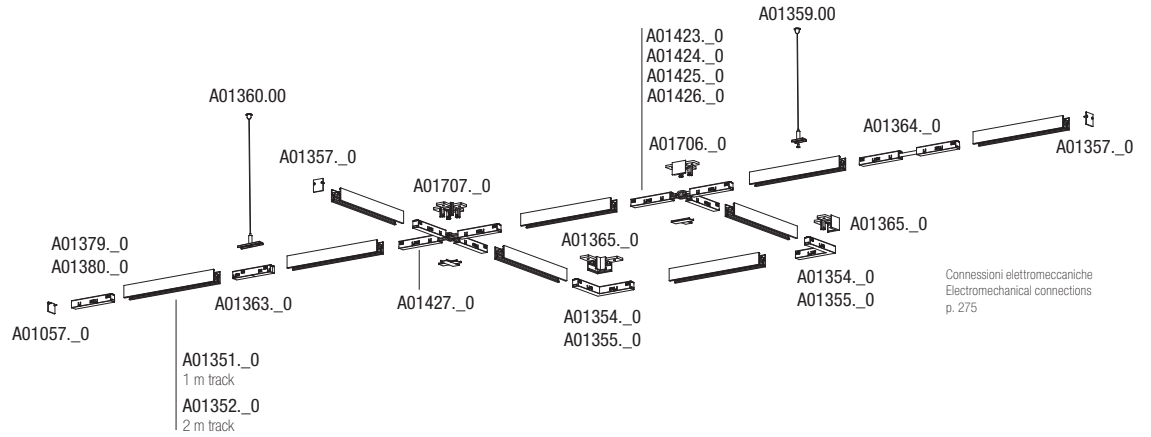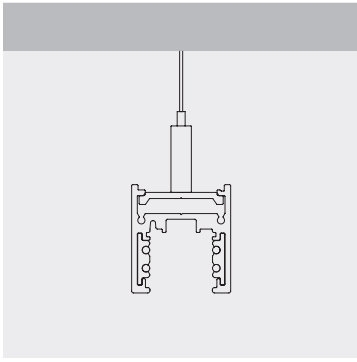


Connessioni elettromeccaniche
Electromechanical connections
p. 275


Installazione a sospensione Suspended installation



DESCRIPTION	CODE	FINISH
Binario a sospensione Multi 24-48Vdc L = 1 m 24-48Vdc suspended Multi track L = 1 m	A01351._0	● 4 Black ○ B White
Binario a sospensione Multi 24-48Vdc L = 2 m 24-48Vdc suspended Multi track L = 2 m	A01352._0	● 4 Black ○ B White



Tappo di chiusura per binario a sospensione Multi Closure cap for suspended Multi track	A01357._0	● 4 Black ○ B White
--	-----------	------------------------



Tappo di chiusura con foro per binario a sospensione Multi Closure cap with hole for suspended Multi track	A01356._0	● 4 Black ○ B White
---	-----------	------------------------



Cover di chiusura estetica L = 3 m per binari Multi L = 3 m cover for Multi track	A01319._0	● 4 Black ○ B White
--	-----------	------------------------



A01365._0



A01706._0




A01707._0


Giunto meccanico a L per binario a sospensione Multi Mechanical L joint for suspended Multi track	A01365._0	● 4 Black ○ B White
--	-----------	------------------------

Giunto meccanico a T per binario a sospensione Multi Mechanical T joint for suspended Multi track	A01706._0	● 4 Black ○ B White
--	-----------	------------------------

Giunto meccanico a X per binario a sospensione Multi Mechanical X joint for suspended Multi track	A01707._0	● 4 Black ○ B White
--	-----------	------------------------



A01359.00



A01360.00

Kit di sospensione L = 1,5 m con staffa corta per binari Multi Suspension kit L = 1.5 m with short bracket for Multi track	A01359.00
---	-----------



























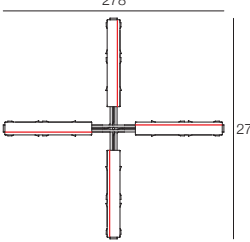





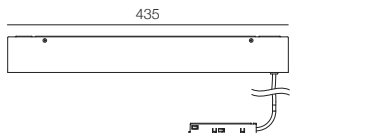

Kit di sospensione L = 1,5 m con staffa lunga in caso di giunzione in linea di binari Multi Suspension kit L = 1.5 m with long bracket in case of inline connection of Multi	A01360.00
---	-----------

Si consiglia di mantenere una distanza massima di L = 0,9 m tra un kit di sospensione e l'altro
It is recommended to maintain a maximum distance of L = 0.9 m between each suspension kit





Pinza per attestatura conduttori in caso di taglio binari Multi e 230Vac Cutters for cutting Multi and 230Vac track conductors	A01362.00
---	-----------



Connessioni elettromeccaniche
Electromechanical connections

INSTALLATION	DESCRIPTION	CODE	FINISH
	Testata alimentazione polarizzata con riferimento Dx per binari Multi 24-48Vdc End feed right for 24-48Vdc Multi tracks  	A01380_0	● 4 Black ○ B White
	Testata alimentazione polarizzata con riferimento Sx per binari Multi 24-48Vdc End feed left for 24-48Vdc Multi tracks 	A01379_0	● 4 Black ○ B White
	Giunto passante polarizzato per binari Multi 24-48Vdc Joint for 24-48Vdc Multi tracks 	A01363_0	● 4 Black ○ B White
	Giunto a L polarizzato con riferimento Esterno per binari Multi 24-48Vdc L electrical joint-external for 24-48Vdc Multi tracks  	A01355_0	● 4 Black ○ B White
	Giunto a L polarizzato con riferimento Interno per binari Multi 24-48Vdc L electrical joint-internal for 24-48Vdc Multi tracks  	A01354_0	● 4 Black ○ B White
	Giunto a T polarizzato con riferimento Esterno-Dx per binari Multi 24-48Vdc T electrical joint-external/right for 24-48Vdc Multi tracks  	A01425_0	● 4 Black ○ B White
	Giunto a T polarizzato con riferimento Esterno-Sx per binari Multi 24-48Vdc T electrical joint-external/left for 24-48Vdc Multi tracks  	A01423_0	● 4 Black ○ B White
	Giunto a T polarizzato con riferimento Interno-Dx per binari Multi 24-48Vdc T electrical joint-internal/right for 24-48Vdc Multi tracks  	A01424_0	● 4 Black ○ B White
	Giunto a T polarizzato con riferimento Interno-Sx per binari Multi 24-48Vdc T electrical joint-internal/left for 24-48Vdc Multi tracks  	A01426_0	● 4 Black ○ B White
	Giunto a X polarizzato per binari Multi 24-48Vdc X-joint for 24-48Vdc Multi tracks 	A01427_0	● 4 Black ○ B White
	Giunto flessibile polarizzato per binari Multi 24-48Vdc Flexible electrical joint for 24-48Vdc Multi tracks 	A01364_0	● 4 Black ○ B White
	Box alimentazione con driver integrato per binari Multi (in 230Vac out 48Vdc 100W max) Box with built-in power supply (in 230Vac out 48Vdc 100W max) for Multi tracks 	A01724_0	● 4 Black ○ B White
	Box di alimentazione con driver integrato per binari a sospensione Multi (in 230Vac out 48Vdc 100W max) con cavo nero L = 2 m Box with built-in power supply (in 230Vac out 48Vdc 100W max) for suspended Multi tracks with black cable L = 2 m 	A01723_0	● 4 Black ○ B White
Optoisolatore per linea DALI per Multi binari 24-48Vdc DALI coupler for 24-48Vdc Multi tracks 	Dispositivo per optoisolamento segnale BUS DALI Rigenerazione del segnale DATI BUS bidirezionale Protezione contro i picchi di tensione in ingresso e uscita Alimentazione in tensione 24-48Vdc OUT 10A max (450W-48Vdc ... 210W-24Vdc) BUS DALI coupler. Regeneration of the bi-directional BUS DATA Protected against input and output voltage peaks Driver 24-48Vdc OUT 10A max (450W-48Vdc ... 210W-24Vdc)	DPS-DA-SRP-NH	


230Vac Tracks

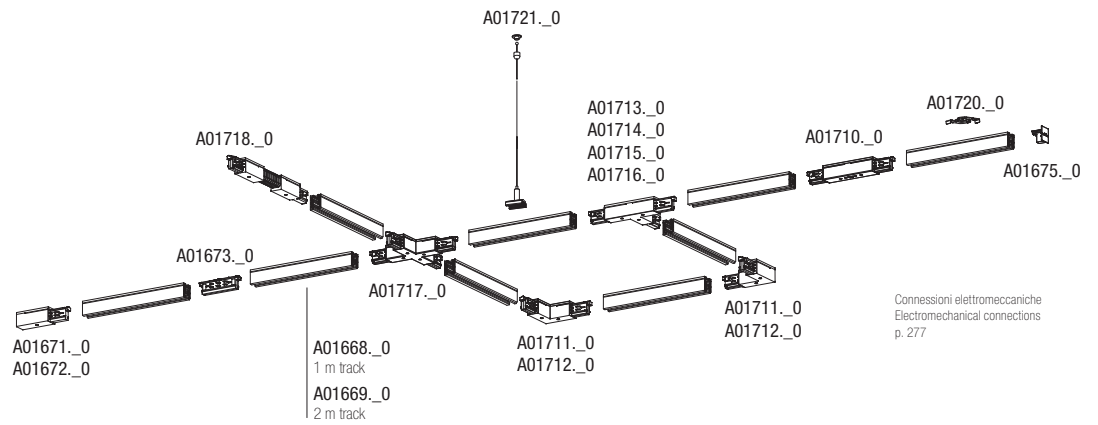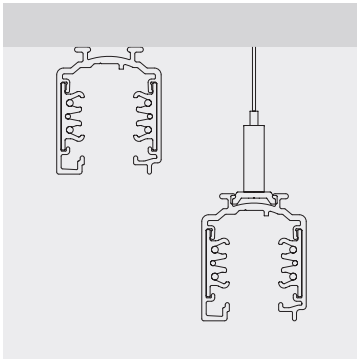


Installazione da superficie e sospensione Surface and pendant installation




DESCRIPTION	CODE	FINISH
Binario da superficie e sospensione 230Vac L = 1 m Surface and suspended 230Vac track L = 1 m	A01668._0	● H Black ○ S White
Binario da superficie e sospensione 230Vac L = 2 m Surface and suspended 230Vac track L = 2 m	A01669._0	● H Black ○ S White
Tappo di chiusura per binari 230Vac Closure cap for 230Vac track	A01675._0	● H Black ○ S White



Gommino per ingresso cavo in testata di alimentazione Gasket for cable entry into end feed	A01719._0	● H Black ○ S White
---	-----------	------------------------




Cover di chiusura estetica L = 3 m per binari 230Vac L = 3 m cover for 230Vac track	A01722._0	● H Black ○ S White
--	-----------	------------------------



Kit di sospensione L = 1,5 m per binari 230Vac Suspension kit L = 1.5 m for 230Vac track	A01721._0	● H Black ○ S White
---	-----------	------------------------

Si consiglia di mantenere una distanza massima di L = 0,9 m tra un kit di sospensione e l'altro
It is recommended to maintain a maximum distance of L = 0.9 m between each suspension kit






















Clip fissaggio rapido binari 230Vac Clip for quick 230Vac track fixing	A01720._0	● H Black ○ S White
---	-----------	------------------------



Pinza per attestatura conduttori in caso di taglio binari Multi e 230Vac Cutters for cutting Multi and 230Vac track conductors	A01362.00	
---	-----------	--

Connessioni elettromeccaniche

Electromechanical connections

		DESCRIPTION	CODE	FINISH
		Testata di alimentazione polarizzata con riferimento Dx per binari 230Vac End feed right for 230Vac tracks	A01671._0	● H Black ○ S White
		Testata di alimentazione polarizzata con riferimento Sx per binari 230Vac End feed left for 230Vac tracks	A01672._0	● H Black ○ S White
		Giunto passante polarizzato per binari 230Vac in fila continua Joint for 230Vac tracks	A01673._0	● H Black ○ S White
		Giunto lineare ingresso alimentazione polarizzato per binari 230Vac Electrical joint for 230Vac tracks	A01710._0	● H Black ○ S White
		Giunto a L polarizzato con riferimento Interno per binari 230Vac L electrical joint-internal for 230Vac tracks	A01711._0	● H Black ○ S White
		Giunto a L polarizzato con riferimento Esterno per binari 230Vac L electrical joint-external for 230Vac tracks	A01712._0	● H Black ○ S White
		Giunto a T polarizzato con riferimento Esterno-Sx per binari 230Vac T electrical joint-external/left for 230Vac tracks	A01713._0	● H Black ○ S White
		Giunto a T polarizzato con riferimento Esterno-Dx per binari 230Vac T electrical joint-external/right for 230Vac tracks	A01714._0	● H Black ○ S White
		Giunto a T polarizzato con riferimento Interno-Sx per binari 230Vac T electrical joint-internal/left for 230Vac tracks	A01715._0	● H Black ○ S White
		Giunto a T polarizzato con riferimento Interno-Dx per binari 230Vac T electrical joint-internal/right for 230Vac tracks	A01716._0	● H Black ○ S White
		Giunto a X polarizzato per binari 230Vac X-joint for 230Vac tracks	A01717._0	● H Black ○ S White
		Giunto flessibile polarizzato per binari 230Vac Flexible electrical joint for 230Vac tracks	A01718._0	● H Black ○ S White

DGA

● ALIMENTATORI

Per il corretto funzionamento di un apparecchio LED DGA è necessario abbinare il giusto alimentatore remoto.

Nella tabella dei dati tecnici, presente in ogni pagina prodotto, è possibile leggere la potenza espressa in Watt (es: 1W, 2W, 6W...) e la relativa corrente di alimentazione (es: 350mA, 500mA, etc.). Alcune tipologie di prodotti sono disponibili con alimentazione remota 12-24Vdc, o con alimentazione integrata (collegamento diretto alla tensione di rete).

È possibile scegliere l'alimentatore più indicato a seconda delle sue caratteristiche tecniche:

- N° LED MAX collegabili / Potenza MAX collegabile
- Dimmerabile
- Protezione IP20 o IP67

Tutti gli alimentatori a corrente costante (350mA, 500mA, 700mA...) sono raggruppati in pagine dedicate e suddivisi in base alla corrente. Su questa tipologia di alimentatori prevedere sempre un collegamento elettrico in serie.

● ALIMENTATORI DIMMERABILI

FUNZIONAMENTO DELL'ALIMENTATORE DIMMERABILE

L'alimentatore è in grado di variare la luminosità dei LED collegati attraverso un segnale di controllo. I collegamenti devono essere eseguiti come mostrato negli schemi dei manuali d'uso e manutenzione.

FUNZIONAMENTO CON 1-10V E 0-10V

La luminosità dei LED varia proporzionalmente al segnale inviato al morsetto.

FUNZIONAMENTO CON POTENZIOMETRO 1-10V

Ruotando il potenziometro si ha la variazione della luminosità dei LED in modo proporzionale o logaritmico a seconda del modello di potenziometro utilizzato.

FUNZIONAMENTO CON PULSANTE

Premendo il pulsante per un tempo inferiore a un secondo si ha l'accensione o lo spegnimento dei LED.

Premendo il pulsante per un tempo superiore a un secondo si ha la regolazione della luminosità dei LED secondo le modalità specifiche dell'alimentatore.

FUNZIONAMENTO CON DALI

Tutti gli alimentatori DGA sono DALI-2, comunicano con un controller DALI-2 tramite un bus di comunicazione bidirezionale a due fili, permettendo di inviare comandi di accensione, spegnimento e dimmerazione, oltre a ricevere informazioni sullo stato del singolo apparecchio.

Gli alimentatori DALI sono componenti essenziali per realizzare sistemi di illuminazione intelligenti, con un controllo preciso e flessibile della luce, garantendo al contempo efficienza ed affidabilità.

FUNZIONAMENTO CON TRIAC

L'alimentatore è progettato per essere controllato da un dimmer Triac che, utilizzando un taglio di fase, consente di dimmerare l'apparecchio LED collegato all'alimentatore.

● DRIVERS

For the correct functioning of a DGA light fixture it is fundamental to select the appropriate remote driver.

In the table reporting the technical data, visible in every product page, it is possible to identify the power in Watt (e.g. 1W, 2W, 6W, etc.) and the related current to be used to run that product (e.g. 350mA, 500mA, etc.). Some product families are available with remote power supply at 12-24Vdc, or with built-in driver (for a direct connection to the main voltage).

It is possible to choose the most appropriate driver according to its technical features:

- Max. number of LEDs to connect / Max. power
- Dimmable
- With IP20 or IP67 protection rate

All our constant current drivers (350mA, 500mA, 700mA, etc.) are grouped in dedicated pages, split according to the current. With this family of drivers, we remind you to always do a series connection.

● DIMMABLE DRIVERS

OPERATION INSTRUCTIONS OF THE DIMMABLE DRIVER

The driver can vary the light intensity of the connected LEDs with control signal. Connections must be carried out as shown in the diagrams of the instruction sheets.

1-10 V AND 0-10 V FUNCTION

The light intensity of the LEDs vary proportionally to the signal sent to the terminal.

1-10 V POTENTIOMETER FUNCTION

By rotating the potentiometer there is variation of the LED light intensity in a proportional or logarithmic way depending on the model of the potentiometer used.

PUSH BUTTON FUNCTION

By pressing the push button for less than one second the LEDs turn on or off.

By pressing the push button for more than one second the light intensity of the LEDs is dimmed according to the driver specifications.

DALI FUNCTION

All DGA drivers are DALI-2, communicate with a DALI-2 controller via a two-wire bidirectional communication bus, allowing on- off and dimming commands to be sent, as well as receiving information on the status of the individual luminaire. DALI drivers are essential components for creating intelligent lighting systems with precise and flexible light control, while ensuring efficacy and reliability.

TRIAC FUNCTION

The power supply is designed to be controlled by a Triac dimmer which, using a phase cut, dims the LED luminaire connected to the power supply.

⚠ ATTENZIONE

Per un buon funzionamento degli alimentatori, è necessario prevedere un adeguato scambio termico in fase di installazione.

NON è possibile installare gli alimentatori in scatole di derivazione stagne in materiale plastico. Se strettamente necessario, meglio prevedere scatole di derivazione in materiale metallico. Si consiglia di installare gli alimentatori in luoghi asciutti e ben areati.

⚠ CAUTION

For a good functioning of DGA drivers, it is necessary to foresee a good thermal exchange during the installation.

It is NOT possible to install drivers in plastic junction boxes. If necessary, please use metallic junction boxes. We suggest to install drivers in dry and well ventilated environments.


● **DISTANZA TRA ALIMENTATORE E APPARECCHI LED**
 La distanza massima (consentita) tra un alimentatore DGA ed un gruppo di apparecchi LED varia a seconda della sezione del cavo utilizzato. Rispettare in ogni caso lo schema e attenersi alle indicazioni riportate in tabella.

● **DISTANCE BETWEEN DRIVER AND LED FIXTURES**
 The maximum distance between a driver and a group of LED fixtures varies according to the cable section to use. In any case, please check the diagram and stick to the instructions written in the table.

Collegamento in SERIE
 per apparecchi in corrente costante
Series connection

NOTA: per distanze oltre 10 m è importante realizzare una dorsale con sezione dei conduttori superiore a quella utilizzata per i collegamenti fra i apparecchi LED.


NOTE: for distances over 10 m it is important to consider a backbone cabling with a conductor cross-section thicker than the one used for the connections between the LED fixtures.

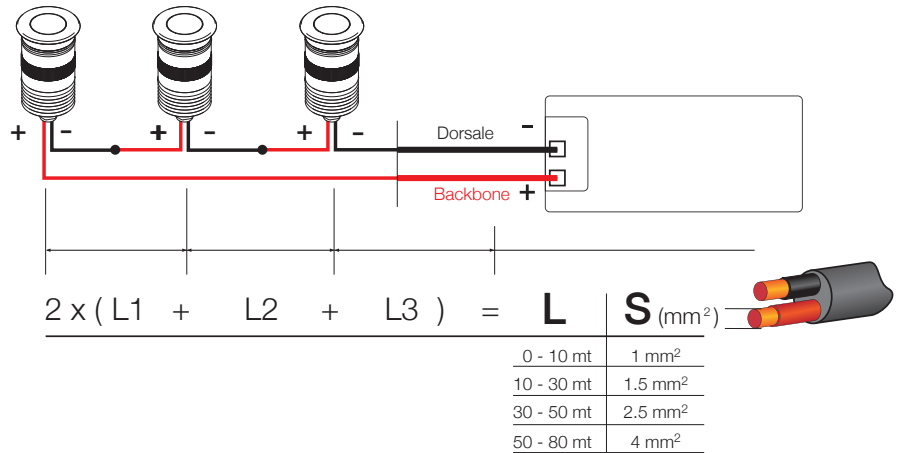

Collegamento in PARALLELO
 per apparecchi in tensione costante
Parallel connection

NOTA: per distanze oltre 10 m è importante realizzare una dorsale con sezione dei conduttori superiore a quella utilizzata per i collegamenti fra i apparecchi LED.

NOTE: for distances over 10 m it is important to consider a backbone cabling with a conductor cross-section thicker than the one used for the connections between the LED fixtures.

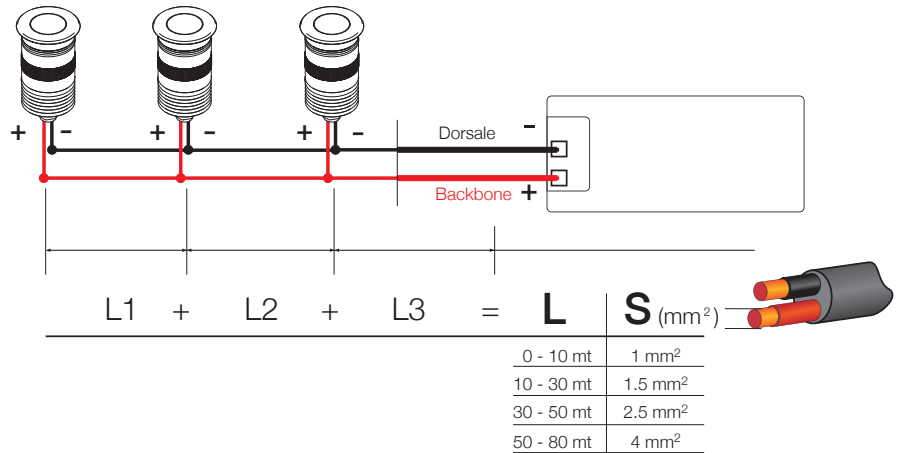

- CODIFICA ALIMENTATORI
- DRIVERS ENCODING

CC20 - F - 350 - N ...

CC Uscita a corrente costante
 OUT constant current
CV Uscita a tensione costante
 OUT constant tension

OUT
 350mA
 400mA
 500mA
 600mA
 700mA
 900mA
 12Vdc
 24Vdc
 48Vdc

P IP 65 - 67
N IP 20 - 40
S SLIM


























... Codice costruttore
 Supplier reference code

- F** Non dimmerabile
 Non dimmable
- M** Dimmerabile 1-10 / pulsante / potenziometro (trimmer)
 Dimmable by 1-10 / push / potentiometer
- D** Dimmerabile DALI
 DALI dimmable
- C** Regolabile con dimmer a taglio di fase IGBT e TRIAC
 Regulating driver with phase cut-off dimmer IGBT and TRIAC
- B** Controllo CASAMBI
 CASAMBI control
- X** Controllo RGBW (segnale DMX, pulsante, dip switch)
 DMX signal, push, dip switch RGBW control
- L** Controllo RGB(W) - DMX / DALI
 RGB(W) - DMX / DALI control
- P** PWM PULSE WIDTH MODULATION































350mA LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC6-F-350-N	RIPPLE FREE	1 - 7 LED 1W 1 LED 4W	1 - 6 LED 1W 1 LED 4W		 Ø 47	IP20	   
CC20-F-350-NI		1 - 14 LED 1W 1 - 4 LED 4W 1 LED 12W	1 - 7 LED 1W 1 - 2 LED 4W		 Ø 42	IP20	
CC20-F-350-N	RIPPLE FREE	1 - 16 LED 1W 1 - 5 LED 4W 1 LED 12W			 Ø 55	IP20	    * 
CC50-F-350-N	RIPPLE FREE	10 - 23 LED 1W 1 - 8 LED 4W 1 - 2 LED 12W	10 - 23 LED 1W 1 - 8 LED 4W 1 - 2 LED 12W		 Ø 84	IP20	    *   








DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-C-350-N	Triac	4 - 16 LED 1W 2 - 5 LED 4W 1 LED 12W			 Ø 55	IP20	   * 
CC15-D-350-S	DALI 2 PUSH RIPPLE FREE AM DIMMING	1 - 14 LED 1W 1 - 4 LED 4W 1 LED 12W			 Ø 30	IP20	  
CC25-DM-350-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 18 LED 1W 1 - 4 LED 4W 1 LED 12W	1 - 12 LED 1W 1 - 3 LED 4W 1 LED 12W		 Ø 55	IP20	   *  
CC70-DM-350-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	10 - 24 LED 1W 1 - 8 LED 4W 1 - 2 LED 12W	10 - 24 LED 1W 1 - 8 LED 4W 1 - 2 LED 12W		 Ø 84	IP20	   
CC50-X-350-NL	DMX RIPPLE FREE DIM TO DARK	1 - 40 LED 1W 1 - 12 LED 4W 1 - 4 LED 12W 1 - 16 LED 3W RGB	1 - 40 LED 1W 1 - 12 LED 4W 1 - 4 LED 12W 1 - 16 LED 3W RGB		 Ø 84	IP20	   













400mA LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-F-400-N	RIPPLE FREE	1 LED 15W			 Ø 55	IP20	    * 





























DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-C-400-N	Triac	1 LED 15W			 Ø 55	IP20	  * 
CC25-DM-400-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 LED 15W			 Ø 55	IP20	   *  


















































500mA LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC6-F-500-N	RIPPLE FREE	1 - 3 LED 2W 1 LED 6W	1 - 3 LED 2W 1 LED 6W		 Ø 47	IP20	   
CC10-F-500-SI		1 - 6 LED 2W 1 LED 6W 1 LED 9W	1 - 3 LED 2W		 Ø 28	IP20	
CC20-F-500-NI		1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	1 - 5 LED 2W 1 LED 6W 1 LED 9W		 Ø 42	IP20	
CC20-F-500-N	RIPPLE FREE	1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W			 Ø 55	IP20	    * 
CC50-F-500-N	RIPPLE FREE	10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W	10 - 22 LED 2W 1 - 5 LED 6W 1 - 3 LED 9W 1 - 2 LED 18W		 Ø 84	IP20	    *   















DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-C-500-N	Triac	2 - 12 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W			 Ø 55	IP20	   * 
CC10-D-500-NI	DALI 2 PUSH	1 - 6 LED 2W 1 LED 6W 1 LED 9W	1 - 3 LED 2W		 Ø 40	IP20	
CC15-D-500-S	DALI 2 PUSH RIPPLE FREE AM DIMMING	1 - 9 LED 2W 1 LED 6W 1 LED 9W			 Ø 30	IP20	  
CC23-D-500-SP	DALI 2 PUSH RIPPLE FREE AM DIMMING	1 - 14 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W			 Ø 37	IP20	   
CC25-DM-500-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 15 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	1 - 8 LED 2W 1 - 2 LED 6W 1 LED 9W		 Ø 55	IP20	   *  
CC38-DM-500-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 17 LED 2W 1 - 4 LED 6W 1 - 3 LED 9W 1 LED 18W	1 - 10 LED 2W 1 - 2 LED 6W 1 LED 9W		 Ø 72	IP20	   
CC70-DM-500-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	10 - 22 LED 2W 1 - 6 LED 6W 1 - 4 LED 9W 1 - 2 LED 18W	10 - 22 LED 2W 1 - 6 LED 6W 1 - 4 LED 9W 1 - 2 LED 18W		 Ø 84	IP20	   
CC50-X-500-NL	DMX RIPPLE FREE DIM TO DARK	1 - 24 LED 2W 1 - 8 LED 6W 1 - 4 LED 9W 1 - 2 LED 18W	1 - 24 LED 2W 1 - 8 LED 6W 1 - 4 LED 9W 1 - 2 LED 18W		 Ø 84	IP20	   
CC52-D-500-NL	DALI 2 RIPPLE FREE DIM TO DARK	1 - 2 Iride 3 Tunable White	1 - 2 Iride 3 Tunable White		 Ø 84	IP20	 



















600mA LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-F-600-NI		1 LED 11W			 Ø 42	IP20	
CC20-F-600-N	RIPPLE FREE	1 LED 11W			 Ø 55	IP20	    * 
CC23-F-600-SP		1 - 2 LED 11W			 Ø 37	IP20	  

DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-C-600-N	Triac	1 LED 11W			 Ø 55	IP20	   * 
CC15-D-600-S	DALI 2 PUSH RIPPLE FREE AM DIMMING	1 LED 11W			 Ø 30	IP20	  
CC25-DM-600-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 2 LED 11W	1 LED 11W		 Ø 55	IP20	   *  

700mA LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC10-F-700-SI		1 - 4 LED 2-2,5W 1 LED 9W			Ø 28	IP20	EL
CC20-F-700-NI		1 - 6 LED 2-2,5W 1 - 2 LED 9W 1 LED 13W			Ø 42	IP20	
CC20-F-700-N	RIPPLE FREE	1 - 8 LED 2-2,5W 1 - 2 LED 9W 1 LED 13W			Ø 55	IP20	
CC23-F-700-SP		1 LED 13W			Ø 37	IP20	
CC50-F-700-N	RIPPLE FREE	10 - 20 LED 2-2,5W 1 - 5 LED 9W 1 - 3 LED 13W 1 - 2 LED 25W	1 - 16 LED 2-2,5W 1 - 3 LED 9W 1 - 2 LED 13W 1 LED 25W		Ø 84	IP20	

DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-C-700-N	Triac	2 - 8 LED 2-2,5W 1 - 2 LED 9W 1 LED 13W			Ø 55	IP20	
CC15-D-700-S	DALI 2 PUSH RIPPLE FREE AM DIMMING	1 - 6 LED 2-2,5W 1 LED 9W 1 LED 13W			Ø 30	IP20	
CC25-DM-700-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 10 LED 2-2,5W 1 - 2 LED 9W 1 LED 13W	1 - 5 LED 2-2,5W 1 LED 9W 1 LED 13W		Ø 55	IP20	
CC38-DM-700-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 16 LED 2-2,5W 1 - 4 LED 9W 1 - 2 LED 13W 1 LED 25W	1 - 6 LED 2-2,5W 1 LED 9W 1 LED 13W		Ø 72	IP20	
CC70-DM-700-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	10 - 20 LED 2-2,5W 1 - 5 LED 9W 1 - 3 LED 13W 1 - 2 LED 25W	10 - 20 LED 2-2,5W 1 - 4 LED 9W 1 - 3 LED 13W 1 LED 25W		Ø 84	IP20	
CC50-X-700-NL	DMX RIPPLE FREE DIM TO DARK	1 - 20 LED 2-2,5W 1 - 5 LED 9W 1 - 3 LED 13W 1 LED 25W 1 - 10 LED 3W RGBW 1 - 3 Iride 10W RGBW 1 - 5 Triium 7W RGBW	1 - 20 LED 2-2,5W 1 - 5 LED 9W 1 - 3 LED 13W 1 LED 25W 1 - 10 LED 3W RGBW 1 - 3 Iride 10W RGBW 1 - 5 Triium 7W RGBW		Ø 84	IP20	





















* Version available upon request


















900mA LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-F-900-N	RIPPLE FREE	1 - 6 LED 3W	1 - 4 LED 3W		 Ø 55	IP20	    * 
CC23-F-900-SP		1 - 11 LED 3W			 Ø 37	IP20	  
CC40-F-900-N	RIPPLE FREE	2 - 6 LED 3W 1 LED 31W			 Ø 50	IP20	   





DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-C-900-N	Triac	2 - 6 LED 3W			 Ø 55	IP20	   * 
CC25-DM-900-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	1 - 8 LED 3W	1 - 4 LED 3W		 Ø 55	IP20	   *  
CC40-D-900-N	DALI 2 0/1...10V PUSH RIPPLE FREE AM DIMMING	3 - 11 LED 3W 1 LED 31W			 Ø 50	IP20	 

1000mA LED driver

IP20



DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC52-D-1000-NL	DALI 2 RIPPLE FREE DIM TO DARK	1 Irīde 3 All White	1 Irīde 3 All White		 Ø 84	IP20	 













350mA LED driver

IP67

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC14-F-350-PI		1 - 13 LED 1W 1 - 4 LED 4W 1 LED 12W		 25 38 79	 Ø 44	IP67	





DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC16-M-350-P	0/1...10V RIPPLE FREE	1 - 15 LED 1W 1 - 4 LED 4W 1 LED 12W	1 - 14 LED 1W 1 - 3 LED 4W 1 LED 12W	 26 54 122	 Ø 60	IP68	  
CC10-D-350-PI	DALI 2	1 - 9 LED 1W 1 - 3 LED 4W		 25 38 120	 Ø 44	IP67	
CC20-D-350-P	DALI 2 RIPPLE FREE AM DIMMING	1 - 16 LED 1W 1 - 5 LED 4W 1 LED 12W	1 - 12 LED 1W 1 - 4 LED 4W 1 LED 12W	 26 54 122	 Ø 60	IP68	  













500mA LED driver

IP67

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC14-F-500-PI		1 - 9 LED 2W 1 - 2 LED 6W 1 LED 9W		 25 38 79	 Ø 44	IP67	
CC20-F-500-PI		1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W		 25 38 120	 Ø 44	IP67	





DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-M-500-P	0/1...10V RIPPLE FREE	1 - 10 LED 2W 1 - 3 LED 6W 1 - 2 LED 9W 1 LED 18W	1 - 8 LED 2W 1 - 2 LED 6W 1 LED 9W	 26 54 122	 Ø 60	IP68	  
CC10-D-500-PI	DALI 2	1 - 5 LED 2W 1 LED 6W 1 LED 9W		 25 38 120	 Ø 44	IP67	
CC25-D-500-P	DALI 2 RIPPLE FREE AM DIMMING	1 - 12 LED 2W 1 - 4 LED 6W 1 - 2 LED 9W 1 LED 18W	1 - 8 LED 2W 1 - 2 LED 6W 1 LED 9W	 26 54 122	 Ø 60	IP68	  









700mA LED driver

IP67

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC14-F-700-PI		1 - 6 LED 2-2,5W 1 LED 9W 1 LED 13W		 25 38 79	 Ø 44	IP67	
CC20-F-700-PI		1 - 8 LED 2-2,5W 1 - 2 LED 9W 1 LED 13W		 25 38 120	 Ø 44	IP67	



DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC20-M-700-P	0/1...10V RIPPLE FREE	1 - 7 LED 2-2,5W 1 - 2 LED 9W 1 LED 13W	1 - 6 LED 2-2,5W 1 - 2 LED 9W 1 LED 13W	 26 54 122	 Ø 60	IP68	
CC10-D-700-PI	DALI 2	1 - 4 LED 2-2,5W 1 LED 9W		 25 38 120	 Ø 44	IP67	
CC30-D-700-P	DALI 2 RIPPLE FREE AM DIMMING	1 - 12 LED 2-2,5W 1 - 3 LED 9W 1 - 2 LED 13W	1 - 6 LED 2-2,5W 1 LED 9W 1 LED 13W	 26 54 122	 Ø 60	IP68	



900mA LED driver

IP67

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC14-F-900-PI		1 - 6 LED 3W		 25 38 79	 Ø 44	IP67	





DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CC10-D-900-PI	DALI 2	1 - 3 LED 3W		 25 38 120	 Ø 44	IP67	



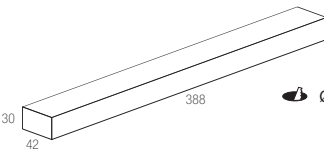

12Vdc LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV20-F-12-N	RIPPLE FREE	21W 2,08A max	10W 0,83A max		 Ø 60	IP20	ERC EL
CV70-F-12-N	RIPPLE FREE	67W 5,8A max			 Ø 80	IP20	ERC EL



DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV25-DM-12-NI	DALI 2 0/1...10V PUSH	21W 2A	11W 1A		 Ø 44	IP20	
CV100-L-12-NL	DALI 2 DMX RIPPLE FREE	94W 1,9A (x4ch) 2,8A (x1ch)	94W 1,9A (x4ch) 2,8A (x1ch)		 Ø 57	IP20	UL ENE EL CULUS





12Vdc LED driver

IP67

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV20-F-12-PI		21W 2A max	12W 1,2A max		 Ø 44	IP67	







DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV60-D-12-PM	DALI 2	55W 5A max	55W 5A max		 Ø 64	IP67	UL ENE ERC CCC S UK CA EL CULUS
CV120-D-12-PM	DALI 2	110W 10A max	110W 10A max		 Ø 74	IP67	UL ENE ERC CCC S UK CA EL CULUS





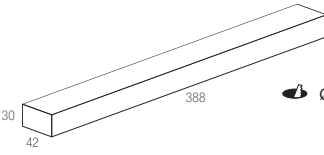






24Vdc LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV20-F-24-N	RIPPLE FREE	21W 1,04A max	10W 0,42A max		 Ø 60	IP20	EAC EL
CV70-F-24-N	RIPPLE FREE	63W 2,9A max			 Ø 70	IP20	EAC EL
CV150-F-24-N	RIPPLE FREE	140W 6,25A max			 Ø 80	IP20	EAC EL



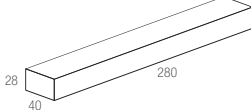

DIMMABLE

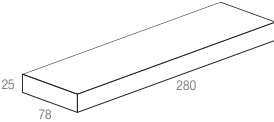CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV25-DM-24-NI	DALI 2 0/1...10V PUSH	22W 1A	11W 0,5A		 Ø 44	IP20	
CV75-DM-24-NI	DALI 2 0/1...10V PUSH	67W 3,125A	33W 1,5A		 Ø 49	IP20	
CV100-L-24-NL	DALI 2 DMX RIPPLE FREE	94W 1A (x4ch) 2,8A (x1ch)	94W 1A (x4ch) 2,8A (x1ch)		 Ø 57	IP20	  
CV200-D-24-P	DALI 2 PUSH RIPPLE FREE	190W 8,33A max	190W 8,33A max		 Ø 82	IP66	EAC





















24Vdc LED driver

IP67

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV30-F-24-PI		27W 1,5A max	13W 0,6A max		 Ø 44	IP67	
CV75-F-24-PI		70W 3,125A max	32W 1,5A max		 Ø 48	IP67	





DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV25-D-24-PI	DALI 2	21W 2,08A max	10W 0,83A max		 Ø 60	IP67	
CV120-D-24-PM	DALI 2	110W 5A max	110W 5A max		 Ø 74	IP67	      
CV200-D-24-PM	DALI 2	185W 6,3A max	185W 8,3A max		 Ø 79	IP67	      



48Vdc LED driver

IP20

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV30-F-48-NI		27W 0,6A max	13W 3A max		 Ø 42	IP20	
CV150-F-48-N		140W 3A max			 Ø 80	IP20	




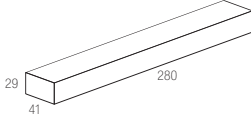


DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV75-DM-48-NI	DALI 2 0/1...10V PUSH	67W 1,55A max	33W 0,75A max		 Ø 49	IP20	







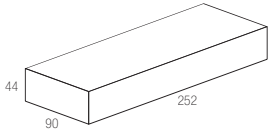48Vdc LED driver

IP67

NOT DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV240-F-48-PM		225W 5A max	225W 5A max		 Ø 79	IP67	
CV320-F-48-PM		300W 6,7A max	300W 6,7A max		 Ø 101	IP67	


DIMMABLE

CODE	TYPE	@230Vac (min - max LED)	@110Vac (min - max LED)	DIMENSIONS (mm)	CUT-OUT	PROTECTION	CERTIFICATIONS
CV120-D-48-PM	DALI 2	110W 2,5A max	110W 2,5A max		 Ø 74	IP67	
CV200-D-48-PM	DALI 2	185W 4,17A max	185W 4,17A max		 Ø 79	IP67	

LED converters 12-24-48 Vdc

IP20






DIMMABLE

CODE	MIN - MAX LED	V _{in}	Out	DIMENSIONS (mm)	CUT-OUT	PROTECTION
CC16-P-350-NI	1 - 2 LED 1W	12 Vdc	350mA		 Ø 19	IP20
	1 - 6 LED 1W 1 LED 4W	24 Vdc				
	1 - 10 LED 1W 1 - 3 LED 4W 1 LED 12W	48 Vdc				
CC22-P-500-NI	1 - 2 LED 2W	12 Vdc	500mA		 Ø 19	IP20
	1 - 6 LED 2W 1 LED 6W 1 LED 9W	24 Vdc				
	1 - 10 LED 2W 1 - 2 LED 6W 1 - 2 LED 9W 1 LED 18W	48 Vdc				
CC30-P-700-NI	1 - 2 LED 2-2,5W 1 LED 9W	12 Vdc	700mA		 Ø 19	IP20
	1 - 5 LED 2-2,5W 1 LED 9W 1 LED 13W	24 Vdc				
	1 - 10 LED 2-2,5W 1 LED 9W 1 - 2 LED 13W	48 Vdc				

LED converters 12-24-48 Vdc




IP65

DIMMABLE















CODE	MIN - MAX LED	V _{in}	Out	DIMENSIONS (mm)	CUT-OUT	PROTECTION
CC16-P-350-PI	1 - 2 LED 1W	12 Vdc	350mA		 Ø 19	IP65
	1 - 6 LED 1W 1 LED 4W	24 Vdc				
	1 - 10 LED 1W 1 - 3 LED 4W 1 LED 12W	48 Vdc				
CC22-P-500-PI	1 - 2 LED 2W	12 Vdc	500mA		 Ø 19	IP65
	1 - 6 LED 2W 1 LED 6W 1 LED 9W	24 Vdc				
	1 - 10 LED 2W 1 - 2 LED 6W 1 - 2 LED 9W 1 LED 18W	48 Vdc				
CC30-P-700-PI	1 - 2 LED 2-2,5W 1 LED 9W	12 Vdc	700mA		 Ø 19	IP65
	1 - 5 LED 2-2,5W 1 LED 9W 1 LED 13W	24 Vdc				
	1 - 10 LED 2-2,5W 1 LED 9W 1 - 2 LED 13W	48 Vdc				

Dimmers and interfaces

DIMMERS



CODE	TYPE	USE WITH	DIMENSIONS (mm)	DESCRIPTION
D480-DMC-1CH-NH	DALI PUSH Triac 0/1...10V	12 - 24 - 48 Vdc		Dimmer 1 canale 12-24-48Vdc - 10A max con controllo DALI, Push, Triac L-V, Pot, 0/1-10 V Frequenza PWM programmabile da 200Hz a 2KHz 1 channel dimmer 12-24-48Vdc - 10A max with DALI, Push, Triac L-V, Pot, 0/1-10 V control. Programmable PWM frequency from 200Hz to 2KHz
D300-D-1CH-NT	DALI	220 - 240Vac		Dimmer 1 canale per moduli led 230Vac dimmerabili Triac L-C 300W max con controllo DALI, DSI e Push 1 channel dimmer for 230Vac Triac L-C dimmable LED modules 300W max with DALI, DSI and Push control
D100-M-1CH-N	PUSH 0/1...10V	12 - 24 Vdc		Dimmer 1 canale 12-24 Vdc -4,5A max con controllo Push, Pot, 0/1-10 V Frequenza PWM 250Hz 1 channel dimmer 12-24 Vdc -4.5A max with Push, Pot, 0/1-10 V, PWM control Frequency 250Hz

CASAMBI


CODE	TYPE	CONNECTIVITY	DIMENSIONS (mm)	DESCRIPTION
CTRL-BT-DM-NK	CASAMBI			Unità di controllo wireless per Driver LED con interfaccia Dimmer 0-10V, 1-10V e DALI. Controllo con APP CASAMBI su Smartphone e Tablet utilizzando protocollo Bluetooth. Wireless control unit for LED drivers with 0-10V, 1-10V and DALI dimming interface. Control system by APP CASAMBI on Smartphones et Tablets, using the Bluetooth protocole.
CTRL-BT-C-NK	CASAMBI			Dimmer per alimentatori LED Triac L-C 85-240Vac max 100W-230Vac (50W-110Vac). Controllo con APP CASAMBI su Smartphone e Tablet utilizzando protocollo Bluetooth. Dimmer Triac L-C 85-240Vac max 100W-230Vac (50W-110Vac). Control by CASAMBI APP on Smartphones e Tablets using Bluetooth protocol.
CTRL-BT-4CH-NK	CASAMBI			Unità di controllo wireless per applicazioni RGBW o Tunable White (TW) a tensione costante. Controllo con APP CASAMBI su Smartphone e Tablet utilizzando protocollo Bluetooth. Input 12-24Vdc Output 6A max totali su 4ch. Wireless control unit for RGBW or Tunable White (TW) applications at constant voltage. Control with CASAMBI APP on Smartphone and Tablet using Bluetooth protocol. Input 12-24Vdc Output 6A max total on 4 channels
CTRL-SA16-BT-D-NK	CASAMBI			Unità di controllo wireless per Driver LED e Sorgenti luminose LED con interfaccia dimmer DALI. Controllo con APP CASAMBI su Smartphone e Tablet utilizzando protocollo Bluetooth Input 110-277Vac.
CTRL-SA32-BT-D-NK	CASAMBI			Wireless control unit for LED Drivers and LED light sources with DALI dimmer interface Control with CASAMBI APP on Smartphone and Tablet using Bluetooth protocol Input 110-277Vac.
CTRL-SA64-BT-D-NK	CASAMBI			CTRL-SA16-BT-D-NK = fino a 16 indirizzi driver DALI / can address up to 16 DALI driver addresses CTRL-SA32-BT-D-NK = fino a 32 indirizzi driver DALI / can address up to 32 DALI driver addresses CTRL-SA64-BT-D-NK = fino a 64 indirizzi driver DALI / can address up to 64 DALI driver addresses
GTW001-BT-BD-NH	CASAMBI			Unità di controllo wireless per sorgenti luminose LED con interfaccia dimmer DALI per Binari MICRO. Controllo con APP CASAMBI su Smartphone e Tablet utilizzando protocollo Bluetooth, fino a 64 lampade su 8 gruppi. Input 24-48Vdc. Installazione a scomparsa. Wireless control unit for LED light sources with DALI dimmer interface for MICRO Tracks. Control with CASAMBI APP on Smartphone and Tablet using Bluetooth protocol, up to 64 lamps on 8 groups. Input 24-48Vdc. Concealed installation.
GTW002-BT-BD-NH	CASAMBI			Unità di controllo wireless per sorgenti luminose LED con interfaccia dimmer DALI per Binari MULTI. Controllo con APP CASAMBI su Smartphone e Tablet utilizzando protocollo Bluetooth, fino a 64 lampade su 8 gruppi. Input 24-48Vdc. Installazione a scomparsa. Wireless control unit for LED light sources with DALI dimmer interface for MULTI Tracks. Control with CASAMBI APP on Smartphone and Tablet using Bluetooth protocol, up to 64 lamps on 8 groups. Input 24-48Vdc. Concealed installation.
GTW003-BT-BD-NH	CASAMBI			Unità di controllo wireless per sorgenti luminose LED con interfaccia dimmer DALI per Binari 230Vac. Controllo con APP CASAMBI su Smartphone e Tablet utilizzando protocollo Bluetooth, fino a 64 lampade su 8 gruppi. Input 230Vac. Installazione a scomparsa. Wireless control unit for LED light sources with DALI dimmer interface for 230Vac tracks. Control with CASAMBI APP on Smartphone and Tablet using Bluetooth protocol, up to 64 lamps on 8 groups. 230Vac input. Concealed installation.

Dimmers and interfaces

POTENTIOMETER FOR DALI DRIVERS

CODE	TYPE		DIMENSIONS (mm)	DESCRIPTION
POT-D-SR-N	DALI	All White		<p>Unità di controllo DALI per sistemi All White (max 50 punti senza alimentazione supplementare). Memoria della luminosità impostata in ON/OFF. Alimentazione a rete 100-240Vac - 3W max</p> <p>DALI control unit for All White systems (max 50 luminaires without additional driver). Memory of the luminosity set on ON/OFF. Driver on the main voltage 100-240vAc - 3W max</p>
POT-D-SRCT-N	DALI	Tunable White		<p>Unità di controllo DALI per sistemi Tunable White (max 50 punti senza alimentazione supplementare). Memoria della luminosità impostata in ON/OFF. Alimentazione a rete 100-240Vac - 3W max</p> <p>DALI control unit for Tunable White systems (max 50 luminaires without additional driver). Memory of the luminosity set on ON/OFF. Driver on the main voltage 100-240vAc - 3W max</p>

POTENTIOMETER FOR 1-10V DRIVERS




CODE	TYPE		DIMENSIONS (mm)	DESCRIPTION
POT-M-REG-N	1...10V			<p>Potenzimetro elettronico rotativo per alimentatori con interfaccia 1-10V</p> <p>Electronic rotary potentiometer for 1-10V dimmable drivers</p>

Emergency systems

IP20




Kit emergenza per faretto led in corrente costante

Emergency kit for led fixtures to be fed in constant current


CODE	V _{in}	LED V _f	OUTPUT CURRENT ON EMERGENCY	INVERTER DIMENSIONS (mm)	SLIM LITIO BATTERY DIMENSIONS (mm)	DURATION	CUT-OUT	PROTECTION
ELC3-F-3HL-S	220-240Vac 3W max	3Vdc	200mA			3 h	 Ø 44	IP20
		9Vdc	190mA					
		12Vdc	150mA					
		18Vdc	120mA					
		36Vdc	75mA					

Kit emergenza per sistemi in tensione costante


Emergency kit for led fixtures to be fed in constant voltage

CODE	V _{in}	OPERATING VOLTAGE	MAXIMUM POWER CONNECTION	INVERTER DIMENSIONS (mm)	BATTERY PACK DIMENSIONS (mm)	DURATION	CUT-OUT	PROTECTION
ELV5-F-3HP-N	220-240 Vac 5W max	12Vdc	20W			3 h	 Ø 56	IP20
		24Vdc	40W					

Collegamento permanente (illuminazione ordinaria)
Maintained with external electronic driver diagram

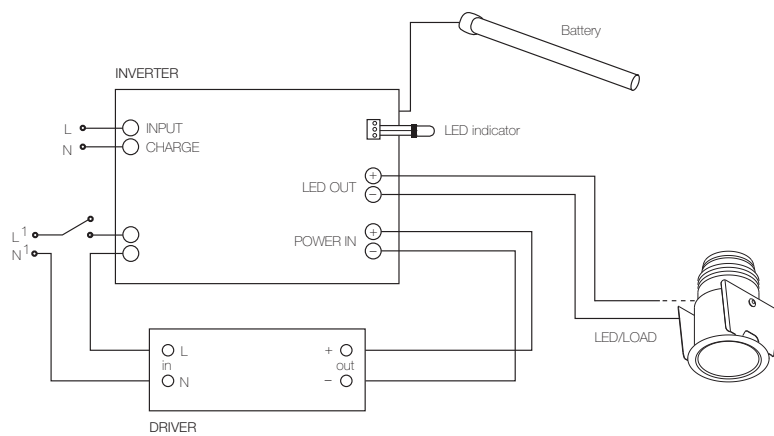

Collegamento non permanente (solo emergenza)
Non-maintained (emergency only) diagram

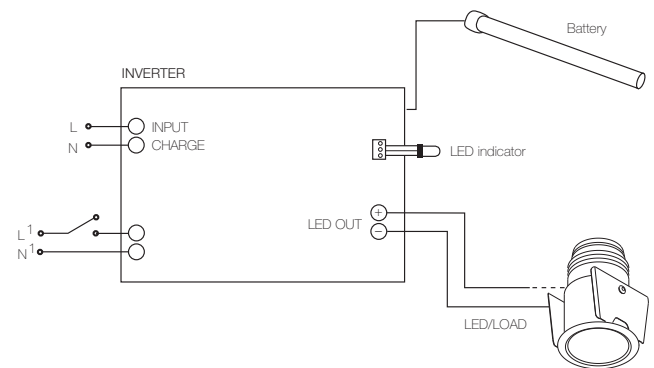




1

- IP67
- WIPS
- 500
700
- 24V
- 2 m
- 400 g
- 2
- 2,3

2

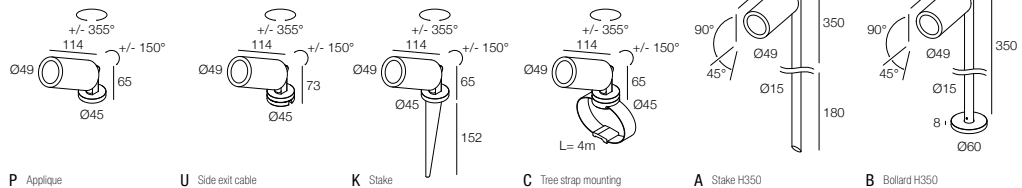

3

8

[1] 14° Lens not interchangeable

Ariel P IP67

	500 / 700mA Lumen Output 3000K	9W 500mA - 770 lm	13W 700mA - 1000 lm
14° Lens [1]	7Q4551	7Q4551	7Q4564
18° Lens	784551	784551	784564
24° Lens	7G4551	7G4551	7G4564
33° Lens	7E4551	7E4551	7E4564
52° Lens	754551	754551	754564

	24V Lumen Output 3000K	9,5W 24Vdc - 770 lm	13W 24Vdc - 1000 lm
14° Lens [1]	7Q4718	7Q4718	7Q4719
18° Lens	784718	784718	784719
24° Lens	7G4718	7G4718	7G4719
33° Lens	7E4718	7E4718	7E4719
52° Lens	754718	754718	754719

4

- | | | | | |
|---|---|--|---|---|
| FINISH | CCT | DECORATIVE RING | OPTICAL FILTER | FIXING |
| <ul style="list-style-type: none"> ● 4 Black ● M8 Brown ● VC Fir Green ● 4A Anthracite Gray ● MS Bright Brown ● 3 Gray ● A6 Gray White | <ul style="list-style-type: none"> ● U1 2200K CRI > 90 ● B2 2400K CRI > 90 ● X 2700K CRI > 90 ● 6 3000K ● W 3000K CRI > 90 ● K 3500K CRI > 90 ● D 4000K CRI > 90 | <ul style="list-style-type: none"> ● 4 Black ● 8 Satin Gold ● I Gold Chrome ● N Satin Nickel ● 1 Shiny Chrome | <ul style="list-style-type: none"> W Without Filter E Elliptical Filter H Hex Louver P Prismatic Filter S Softening Lens | <ul style="list-style-type: none"> P Applique U Side exit cable K Stake C Tree strap mounting A Stake H350 B Bollard H350 |

5


7

SUGGESTED DRIVERS (not included)


500mA	CC14-F-500-PI
700mA	CC14-F-700-PI
24Vdc	CV30-F-24-PI

6

ACCESSORIES

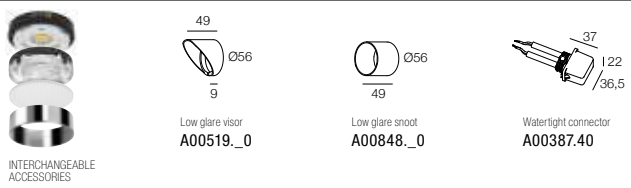











































EXAMPLE CODE COMPOSITION



- 1 FOTO DEL PRODOTTO
PRODUCT PICTURE
- 2 SPECIFICHE TECNICHE
TECHNICAL SPECIFICATIONS
- 3 DISEGNI TECNICI
TECHNICAL DRAWINGS

- 4 FLUSSO LUMINOSO
DELIVERED LUMEN
- 5 CONFIGURAZIONE PRODOTTO
PRODUCT CONFIGURATION
- 6 ACCESSORI
ACCESSORIES

- 7 DRIVER SUGGERITI
SUGGESTED DRIVERS
- 8 NOTE
NOTES

	Grado di protezione IP <i>IP protection rating</i>		Incasso a soffitto <i>Ceiling recessed</i>		Apparecchio carrabile <i>Drive-over luminaire</i>
	Sistema di protezione dalle infiltrazioni d'acqua <i>Water Infiltration Protection System</i>		Incasso a parete, soffitto <i>Wall, ceiling recessed</i>		Grado di protezione IK <i>IK protection rating</i>
	Classe I <i>Class I</i>		Incasso a parete, soffitto, pavimento <i>Wall, ceiling, floor recessed</i>		Installazione con controcassa <i>Installation with recessed box</i>
	Classe II <i>Class II</i>		Incasso a parete, pavimento <i>Wall, floor recessed</i>		Cavo uscente dell'apparecchio <i>Luminaire outgoing cable</i>
	Classe III <i>Class III</i>		Incasso a pavimento <i>Floor recessed</i>		Peso dell'apparecchio <i>Luminaire weight</i>
	Collegamento in parallelo <i>Parallel connection</i>		Incasso a parete <i>Wall recessed</i>		Dimensioni foro incasso <i>Cut-out</i>
	Collegamento in serie <i>Series connection</i>		Incasso a parete <i>Wall recessed</i>		Dimensioni foro incasso quadro <i>Square cut-out</i>
	Tecnologia Driverless <i>Driverless technology</i>		Montaggio a soffitto <i>Ceiling mounted</i>		Sistema Plug&Play <i>Plug&Play system</i>
	Alimentazione integrata <i>Built-in driver</i>		Montaggio a parete, soffitto <i>Wall, ceiling mounted</i>		Step MacAdam <i>MacAdam Step</i>
	Dimmerabile <i>Dimmable</i>		Montaggio a parete, soffitto, pavimento <i>Wall, ceiling, floor mounting</i>		Certificazione TM66 <i>TM66 Certification</i>
	Non dimmerabile <i>Not dimmable</i>		Montaggio a parete, pavimento <i>Wall, floor mounted</i>		Certificazione EN 60598-2-22 <i>EN 60598-2-22 Certification</i>
			Montaggio a pavimento <i>Floor mounted</i>		
			Montaggio a parete <i>Wall mounted</i>		
			Montaggio a parete <i>Wall mounted</i>		
			Montaggio a parete <i>Wall mounted</i>		
			Montaggio a pavimento <i>Floor mounted</i>		
			Montaggio a binario <i>Track mounted</i>		
			Sospensione a binario <i>Suspended track mounted</i>		
			Montaggio a sospensione <i>Pendant</i>		
			Montaggio per teca <i>Showcase mounted</i>		

CERTIFICAZIONI E IMPEGNO AMBIENTALE
CERTIFICATIONS AND ENVIRONMENTAL COMMITMENT

La qualità dei nostri processi è garantita da importanti certificazioni internazionali:

- ISO 9001
- ISO 14001

DGA ha inoltre avviato il processo per l'ottenimento della certificazione ISO 45001, relativa alla gestione della salute e sicurezza sul lavoro. Il rilascio è previsto entro dicembre 2025.

DGA ha ottenuto la certificazione TM66 su alcune linee di prodotto, a conferma dell'impegno verso la progettazione sostenibile, la durabilità e la riciclabilità dei corpi illuminanti.

Per agevolare la progettazione integrata, mettiamo a disposizione modelli BIM per una selezione di prodotti, offrendo un supporto concreto a progettisti e lighting designer.

L'attenzione all'ambiente si riflette anche nella logistica: grazie al programma GoGreen Plus di DHL, DGA contribuisce attivamente alla riduzione delle emissioni di CO₂ legate alle spedizioni.

In ottica di economia circolare, DGA è membro del Consorzio Ecolight, responsabile della gestione e del trattamento dei RAEE (Rifiuti da Apparecchiature Elettriche ed Elettroniche), nel rispetto delle normative ambientali in Italia, Germania e Austria.

Abbiamo inoltre aderito al Global Compact delle Nazioni Unite, condividendo i dieci principi fondamentali in materia di diritti umani, lavoro, ambiente e lotta alla corruzione.

DGA si impegna ogni giorno a coniugare innovazione, responsabilità e sostenibilità, contribuendo a costruire un futuro più consapevole per l'illuminazione professionale.

The quality of DGA's processes is supported by major international certifications:

- ISO 9001
- ISO 14001

DGA has also started the process to obtain ISO 45001 certification for occupational health and safety management, with completion expected by December 2025.

TM66 certification has been obtained for selected product lines, confirming DGA's commitment to sustainable design and to ensuring the durability and recyclability of its luminaires.

To support integrated design workflows, BIM models are available for a selection of products, offering concrete support to architects, planners, and lighting designers.

DGA's environmental commitment extends to logistics: through the DHL GoGreen Plus programme, the company actively contributes to reducing CO₂ emissions associated with shipments.

Aligned with the principles of the circular economy, DGA is a member of the Ecolight Consortium, responsible for the collection and treatment of WEEE (Waste Electrical and Electronic Equipment) in accordance with environmental regulations in Italy, Germany, and Austria.

DGA is also a participant in the United Nations Global Compact, endorsing its ten universal principles related to human rights, labour, environmental protection, and anticorruption.

DGA is committed to combining innovation, responsibility, and sustainability, helping shape a more conscious future for professional lighting.



Tutti i prodotti DGA sono progettati e realizzati nel pieno rispetto delle normative europee in materia di sicurezza. I dettagli relativi alla conformità sono disponibili nelle schede tecniche e nei manuali d'uso.

La tecnologia LED è in costante evoluzione e, per garantire standard sempre più elevati in termini di prestazioni, efficienza e affidabilità, i nostri apparecchi vengono regolarmente aggiornati. Per questo motivo, i prodotti realizzati in periodi differenti possono presentare lievi variazioni nella resa luminosa, nelle finiture o nelle dimensioni, nell'ottica di un costante miglioramento. Le informazioni contenute in questo catalogo hanno valore puramente indicativo e non costituiscono elemento vincolante.

DGA S.p.A. si riserva il diritto di modificare, aggiornare o sostituire i propri prodotti in qualsiasi momento, al fine di migliorarne le caratteristiche tecniche e qualitative, anche senza preavviso. L'azienda si riserva inoltre la facoltà di rimuovere articoli o intere collezioni dal presente catalogo. Eventuali variazioni saranno comunicate in fase di offerta o conferma d'ordine. Per accedere alle informazioni tecniche più aggiornate, comprese schede prodotto, codici articolo e documentazione scaricabile, vi invitiamo a consultare la sezione Prodotti del nostro sito ufficiale: www.dga.it, costantemente aggiornato. Per qualsiasi ulteriore informazione o necessità, il nostro Servizio Clienti è a vostra completa disposizione.

DGA è un marchio registrato.

La riproduzione del marchio su documenti commerciali, cataloghi, siti web o altri supporti è consentita esclusivamente previa autorizzazione scritta da parte di DGA S.p.A., titolare del marchio. Il marchio non può essere modificato né utilizzato in modalità differenti da quelle espressamente approvate dall'azienda. Le immagini e i disegni presenti in questo catalogo possono essere utilizzati unicamente a supporto di comunicazioni relative ai prodotti e alle attività di DGA S.p.A. Qualsiasi altro utilizzo, inclusa la riproduzione o diffusione dei contenuti visivi, è vietato senza l'autorizzazione scritta dell'azienda.

All DGA products are designed and manufactured in full compliance with European safety regulations. Detailed information on product compliance is available in the technical sheets and user manuals.

LED technology is constantly evolving and, to ensure ever higher standards in terms of performance, efficiency and reliability, our devices are regularly updated. For this reason, products manufactured at different times may exhibit slight variations in light output, finishes, or dimensions, all part of our commitment to continuous improvement.

The information contained in this catalog is for reference purposes only and does not constitute a binding commitment.

DGA S.p.A. reserves the right to modify, update, or replace its products at any time in order to enhance their technical and qualitative features, without prior notice.

The company also reserves the right to remove individual items or entire collections from this catalog. Any such changes will be communicated during the offer or order confirmation process. For the most up-to-date technical information — including product specifications, item codes, and downloadable documentation, please refer to the Products section of our official website: www.dga.it, which is constantly updated. Should you require any further information or support, our Customer Service team is always at your disposal.

DGA is a registered trademark.

Use of the trademark on commercial materials, catalogs, websites, or other media is permitted only with prior written authorization from DGA S.p.A., the trademark owner. The trademark may not be altered or used in any way that differs from the company's approved guidelines. All images and drawings featured in this catalog may only be used to support communications related to DGA S.p.A. products and activities. Any other use, including reproduction or distribution of visual content, is strictly prohibited without the company's written consent.

DGA S.p.A.

HEAD OFFICE

Via Pietro Nenni 72/B
50013 Campi Bisenzio (FI) Italy
T +39 055 8986235

PRODUCTION SITE

Via Gattinella, 18
50013 Campi Bisenzio (FI) Italy
T +39 055 5391520

MILAN SHOWROOM

Corso Monforte 23
20122 Milan
milanoshowroom@dga.it
T +39 02 25064156

EXPORT SALES DEPARTMENT

export@dga.it
T +39 055 8945892

ITALY SALES DEPARTMENT

commerciale@dga.it
T +39 055 8986235

COMMUNICATION DEPARTMENT

communication@dga.it
T +39 055 8986235

LIGHTING DESIGN & CONSULTANCY

lighting@dga.it
T +39 055 8986235

TECHNICAL DEPARTMENT

ufficiotecnico@dga.it
T +39 055 8986235

DGA France SAS

46 rue du Cherche Midi
75006 Paris
dga@dgafrance.fr
T +33 185092550

PARIS SHOWROOM

46 rue du Cherche Midi
75006 Paris

Editorial design:
Studio Iknoki

Graphic design:
creativearea.studio

Photo:
AsolanaGroup
Gavriil Papadiotis
if-agency
In-edito
Intothesign.it
Mirror
slowphoto.studio

© DGA S.p.A.
www.dga.it



Finished printing:
May 2026



Prodotto di stampa
contributo per il clima
ClimatePartner.com/23447-2506-1005

