


Ariel Contour B Micro

Track projector | IP40 | Class III | Dimmable

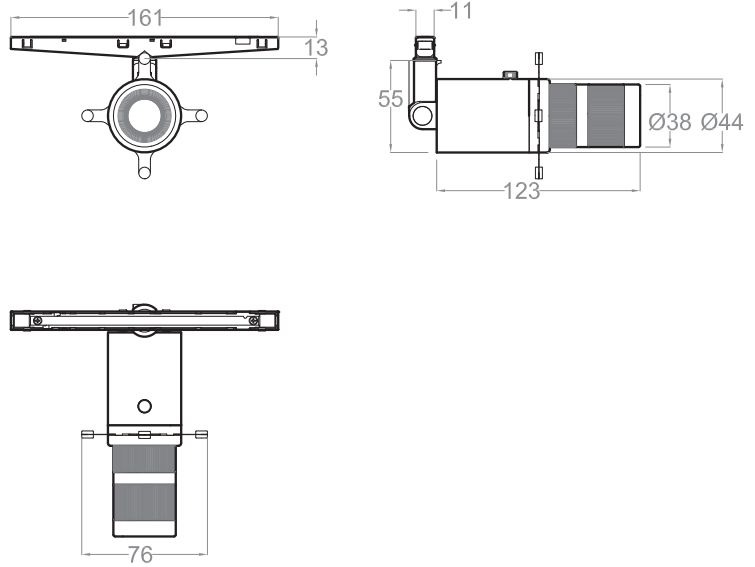

LIGHT SOURCE & OPTIC

Power

10W

Lens

Zoom Lens: 24°>35°

Beam Direction

Adjustable:
Tilting +/- 90°, Rotating +/- 355°,
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>90
2400K CRI>90
2700K CRI>90/95
3000K CRI>80/90/95
3500K CRI>90/95
4000K CRI>90

Average operational life

>50.000 hours

FIXTURE

Dimensions

Ø 38mm x H 123mm

Material

Aluminium

Body finishes

Black

Weight

360gr

Mounting

On Track

Fixing

Track connector

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Supply current

Constant tension 24-48 Vdc

Driver


Remote (not included)

Control

On/off
DALI
Broadcast

Ariel Contour B Micro

PHOTOMETRIC DATA (3000K CRI>90)

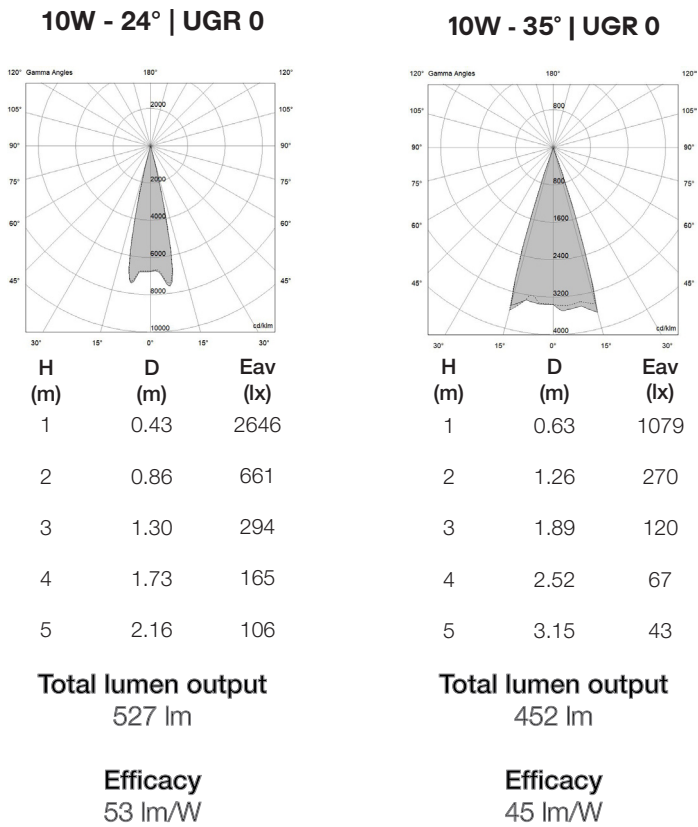

Ariel Contour B Micro

INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Micro Track:


Standard track (A00918._0)

1m



Trimless track (A01064._0)

1m

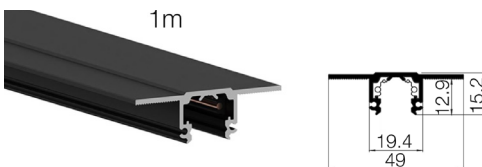

Suspended track (A01664._0)

1m




SUGGESTED REMOTE DRIVERS

On/Off :

CC70-F-24-N

CV70-F-48-N




For On/Off and DALI version.
Please consider 1 address for each DALI projector.

Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI

CV75-DM-48-NI



For Broadcast version.
Please consider 1 address for each driver in case of DALI control.

Other options upon request