


Ariel Contour

Surface projector | IP40 | Class III | Dimmable

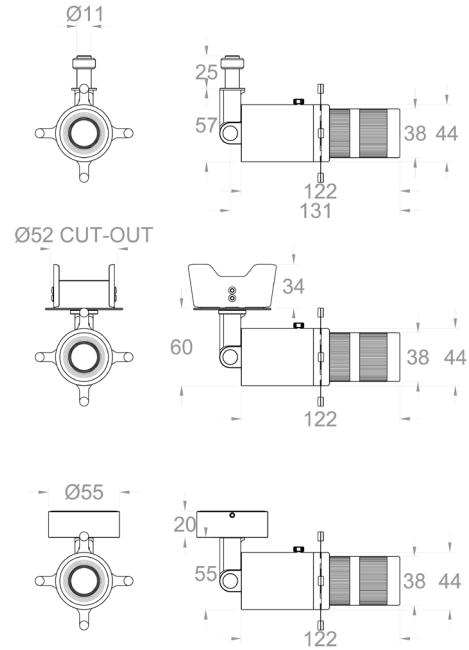

LIGHT SOURCE & OPTIC

Power

9W

Zoom lens

24°>35°

Beam Direction

Adjustable:
Tilting +/- 90°, Rotating +/- 355°,
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>90
2400K CRI>90
2700K CRI>90/95
3000K CRI>80/90/95
3500K CRI>90/95
4000K CRI>90

Lifetime

(L70) >77.000 hrs

FIXTURE

Dimensions

Ø 38mm x H 123mm

Material

Aluminium

Body finishes

Black

Weight

380gr

Mounting

Semirecessed:
cut out Ø 12mm - ring nut
cut out Ø 51mm - springs
cut out Ø 55mm - base

Fixing

Ring nut
Springs
Base for inner connection

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current: 500 mA
Typical Vf= 18V

Driver


Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Ariel Contour

PHOTOMETRIC DATA (3000K CRI>90)

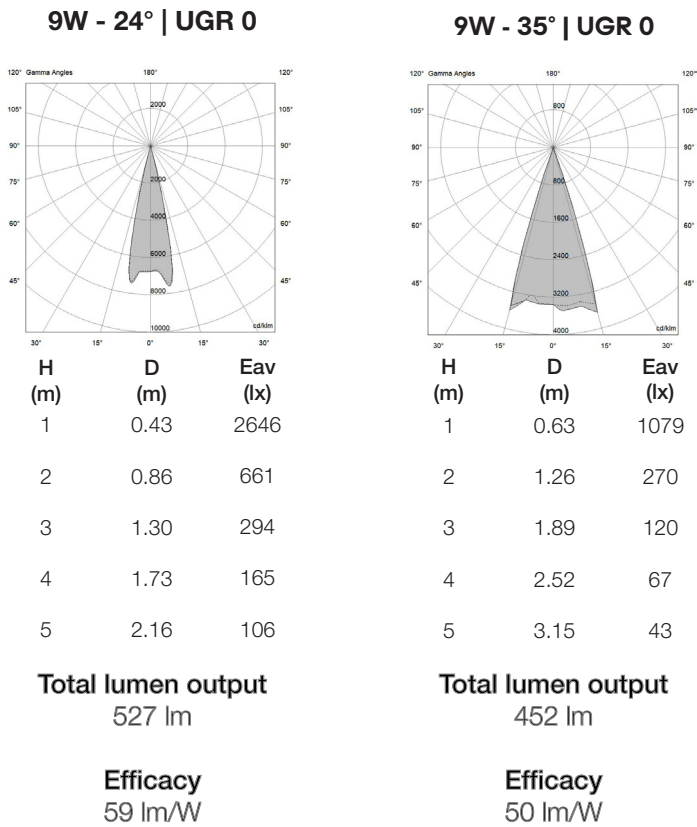



Ariel Contour

SUGGESTED REMOTE DRIVERS

On/Off :


CC20-F-500-N




 Ø 55

Phase cut dimmable:


CC20-C-500-N



 Ø 55

DALI 2 / Push dimmable:

CC10-D-500-NI



 Ø 30

Other options upon request