


Ariel i IP67 Plug&Play

Recessed Light | IP67 | Class III | Dimmable

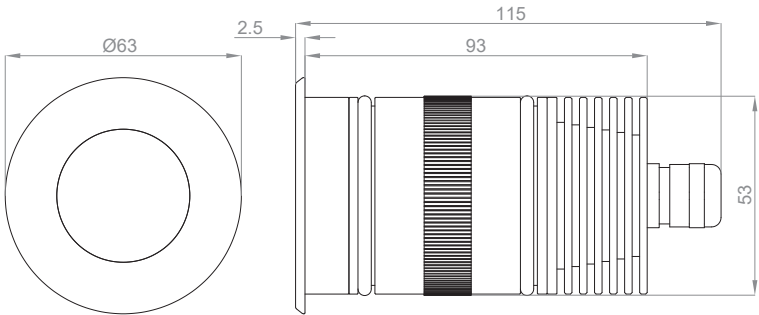

LIGHT SOURCE & OPTIC

Power
9W
9.5W

Lens
14° / 18° / 24° / 33° / 52°

Beam Direction
Fixed

Material
PMMA

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K
2200K CRI>90
2400K CRI>90
2700K CRI>90
3000K
3000K CRI>90
3500K CRI>90
4000K CRI>90

Lifetime
(L90) >55.000 hrs

FIXTURE

Dimensions
Ø 63mm x H 115mm

Material
Aluminium

Body finishes
Black
Grey
Stainless Steel AISI 316L

Weight
400gr

Mounting
Recessed

Fixing
Wall - Floor Recessed

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Main Voltage:
24 Vdc
500 mA

Driver requirement
Remote (not included)

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI


Ariel i IP67 Plug&Play

PHOTOMETRIC DATA (3000K CRI>90)

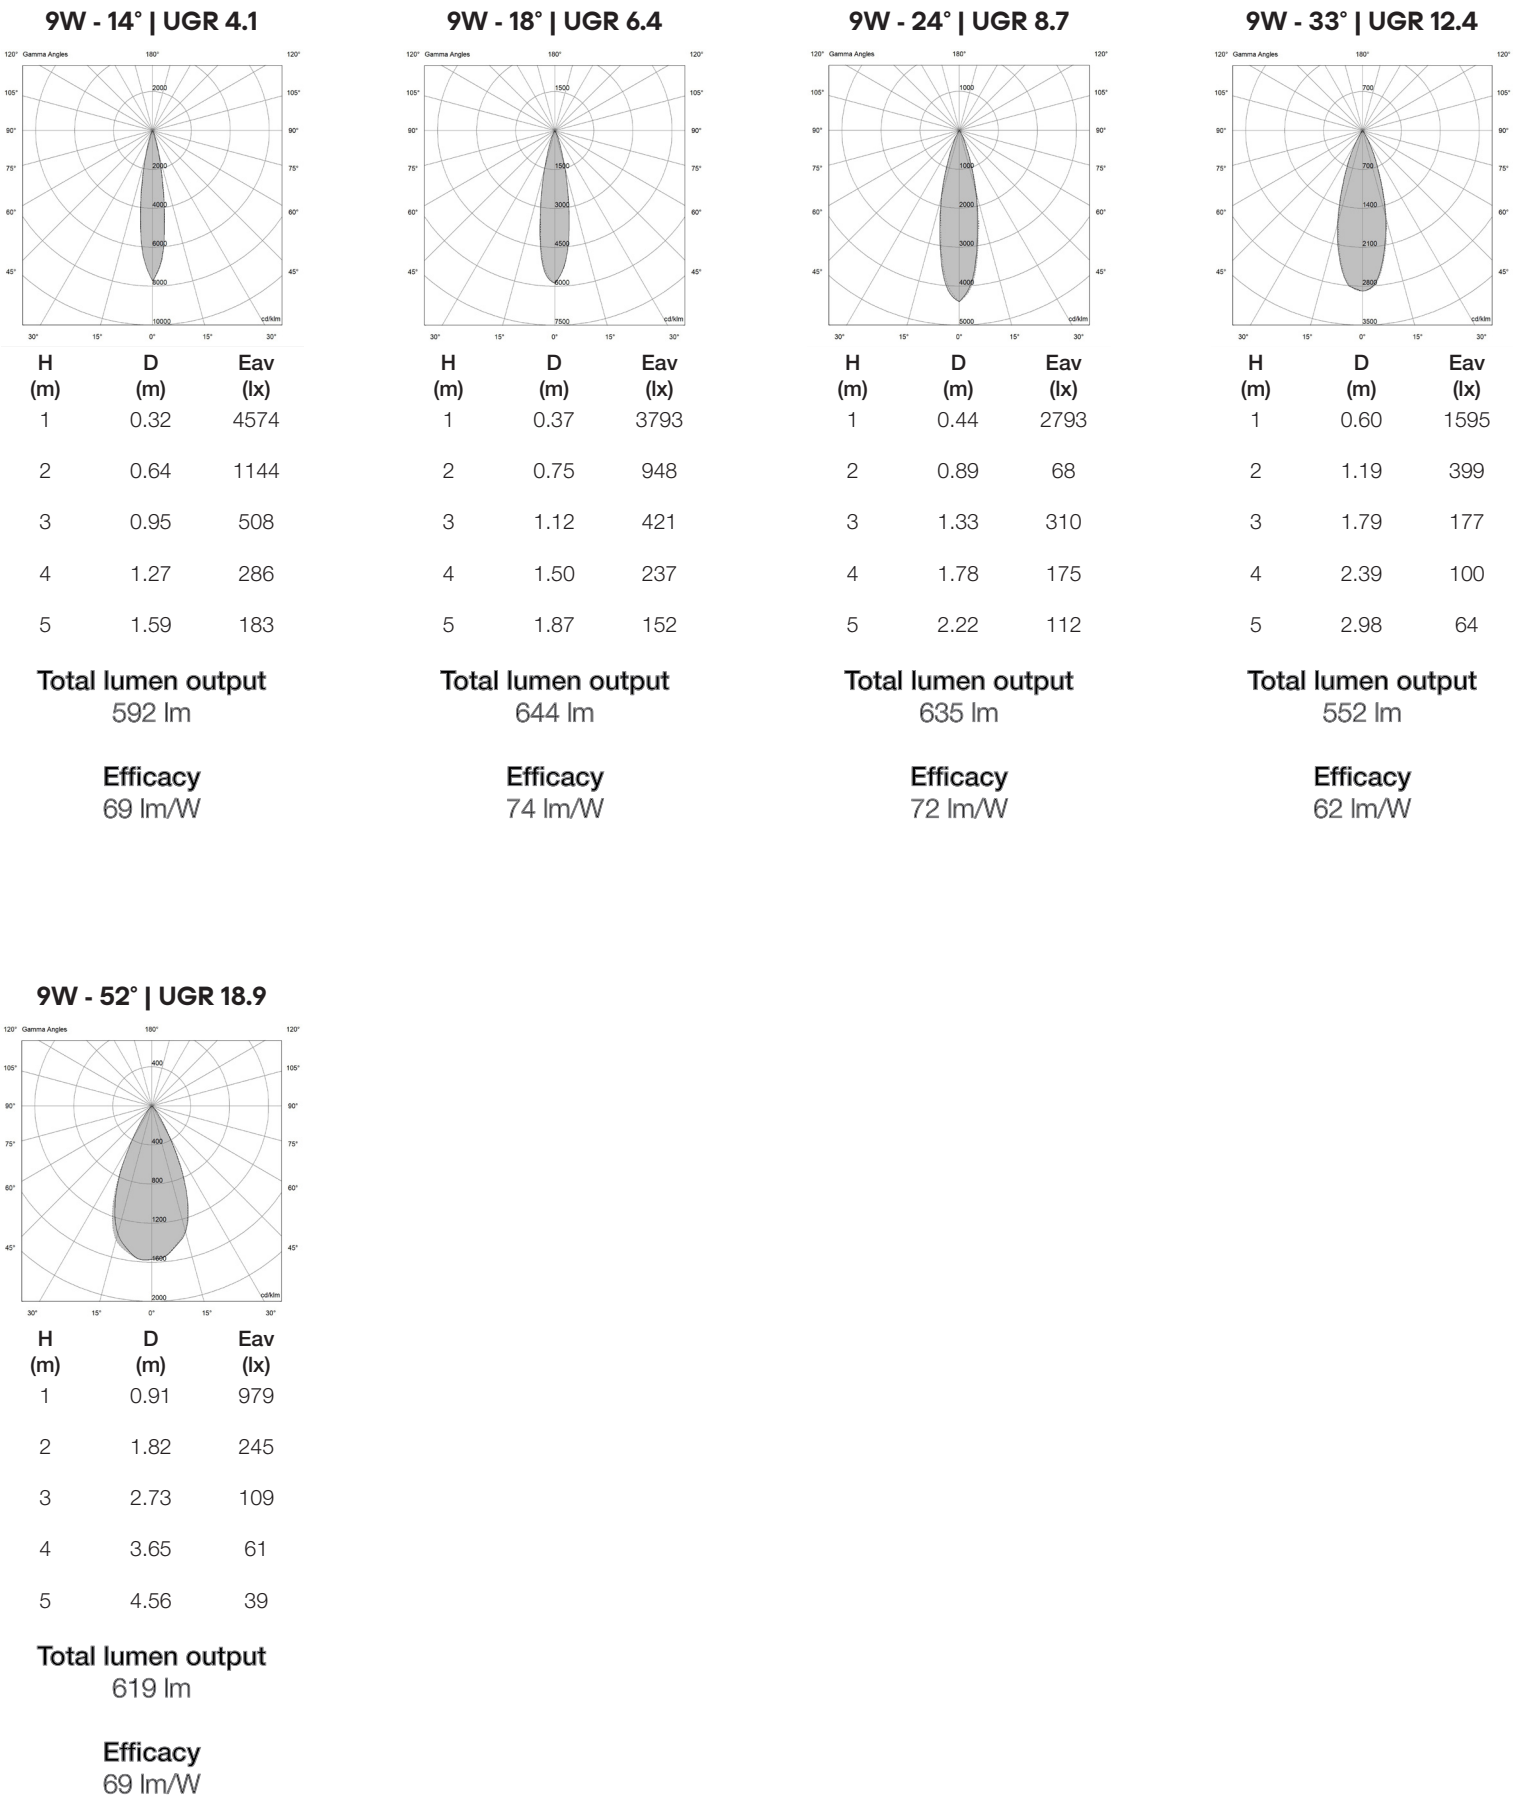


Ariel i IP67 Plug&Play

PHOTOMETRIC DATA (3000K CRI>90) - Elliptical filter

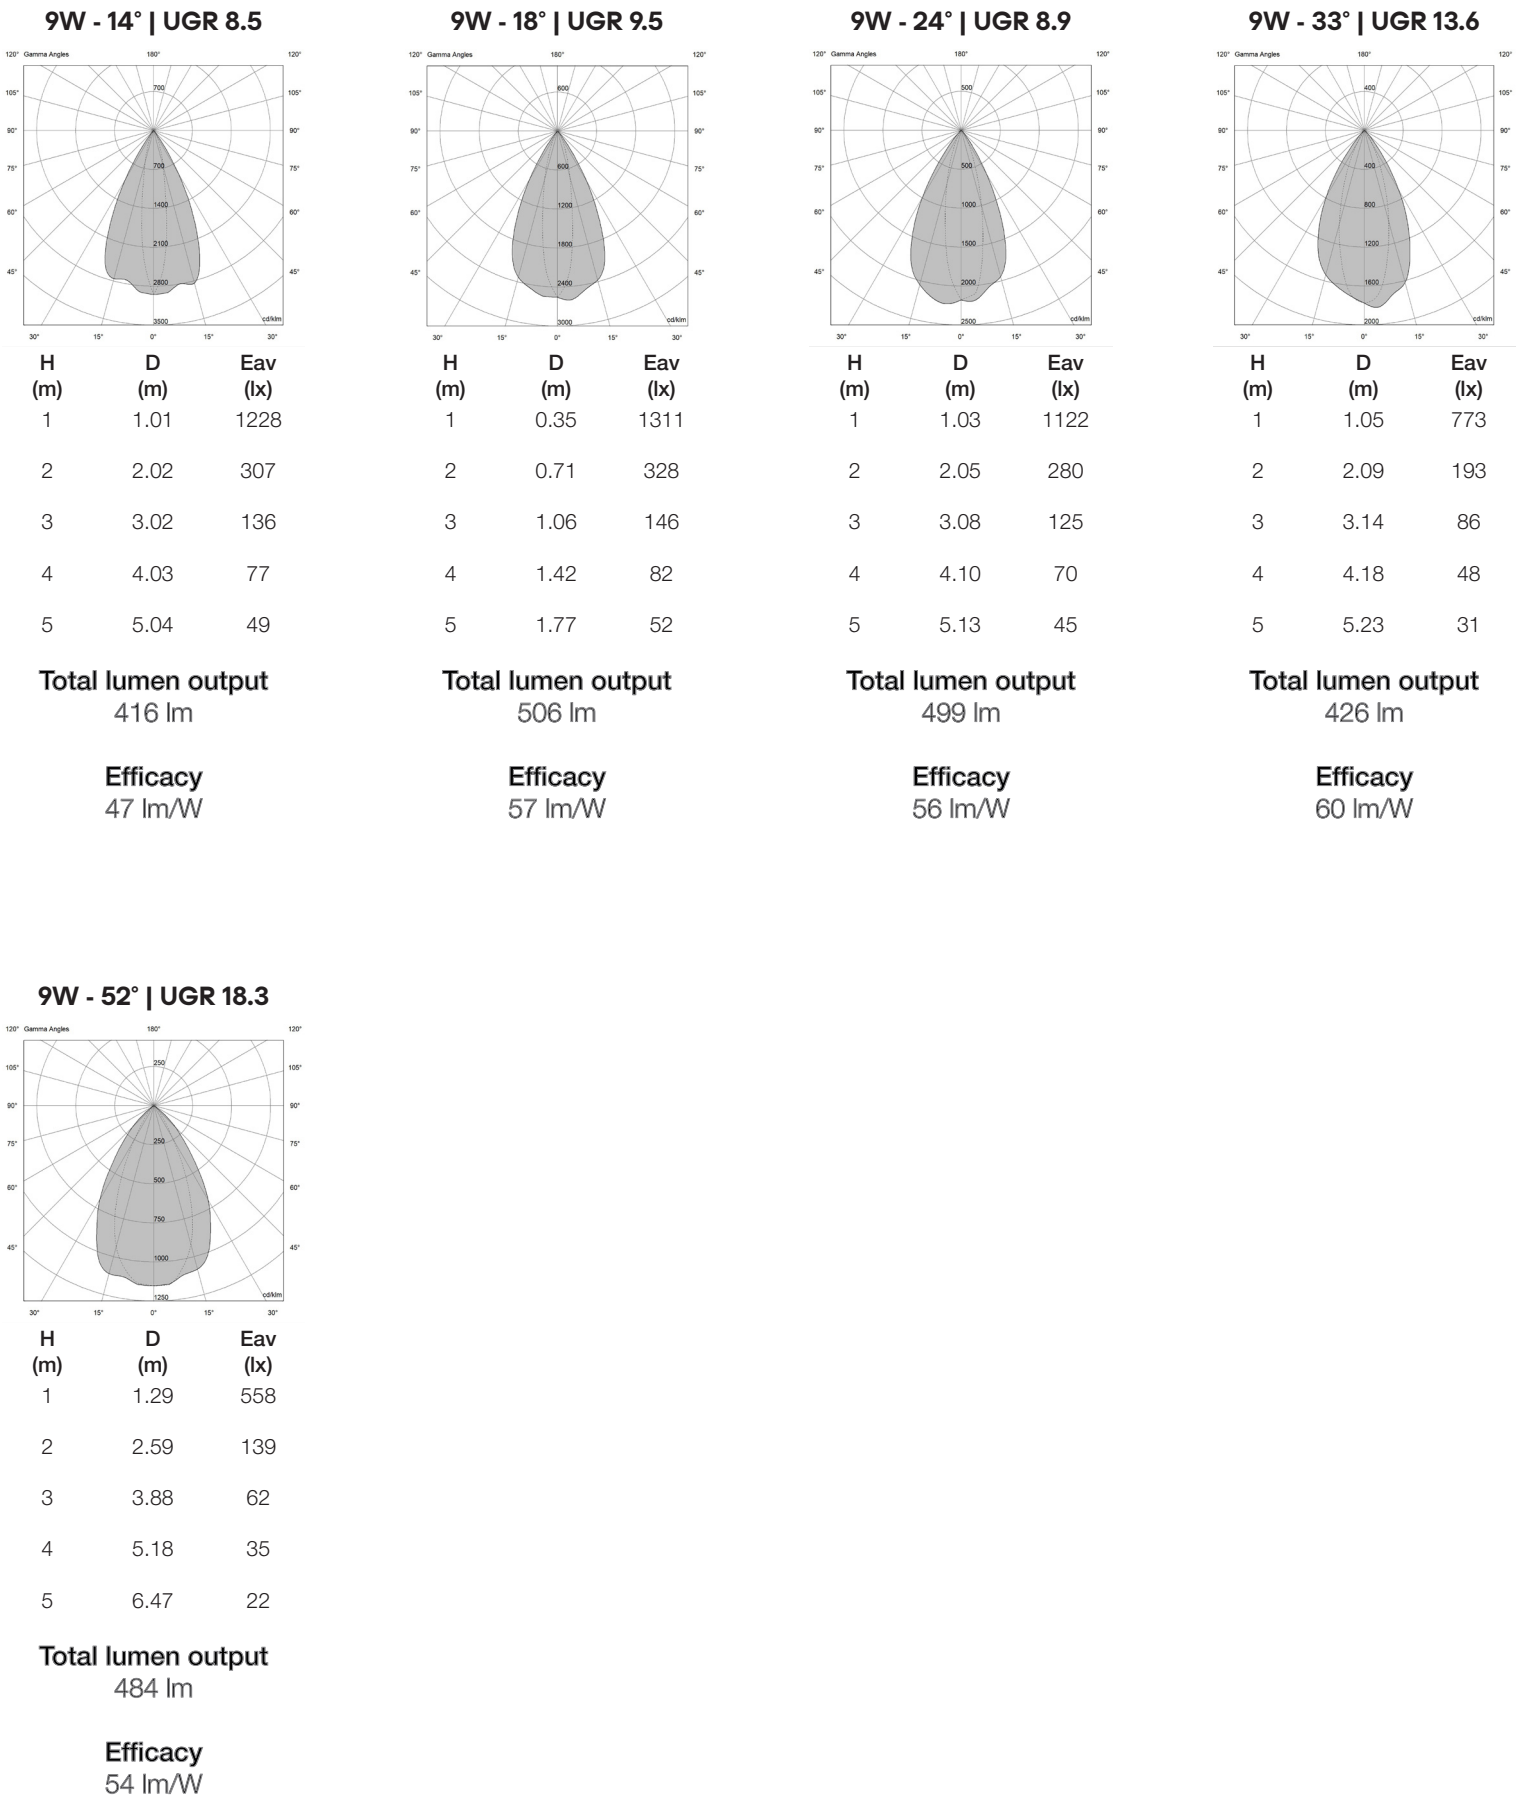


Ariel i IP67 Plug&Play

PHOTOMETRIC DATA (3000K CRI>90) - Hex louver

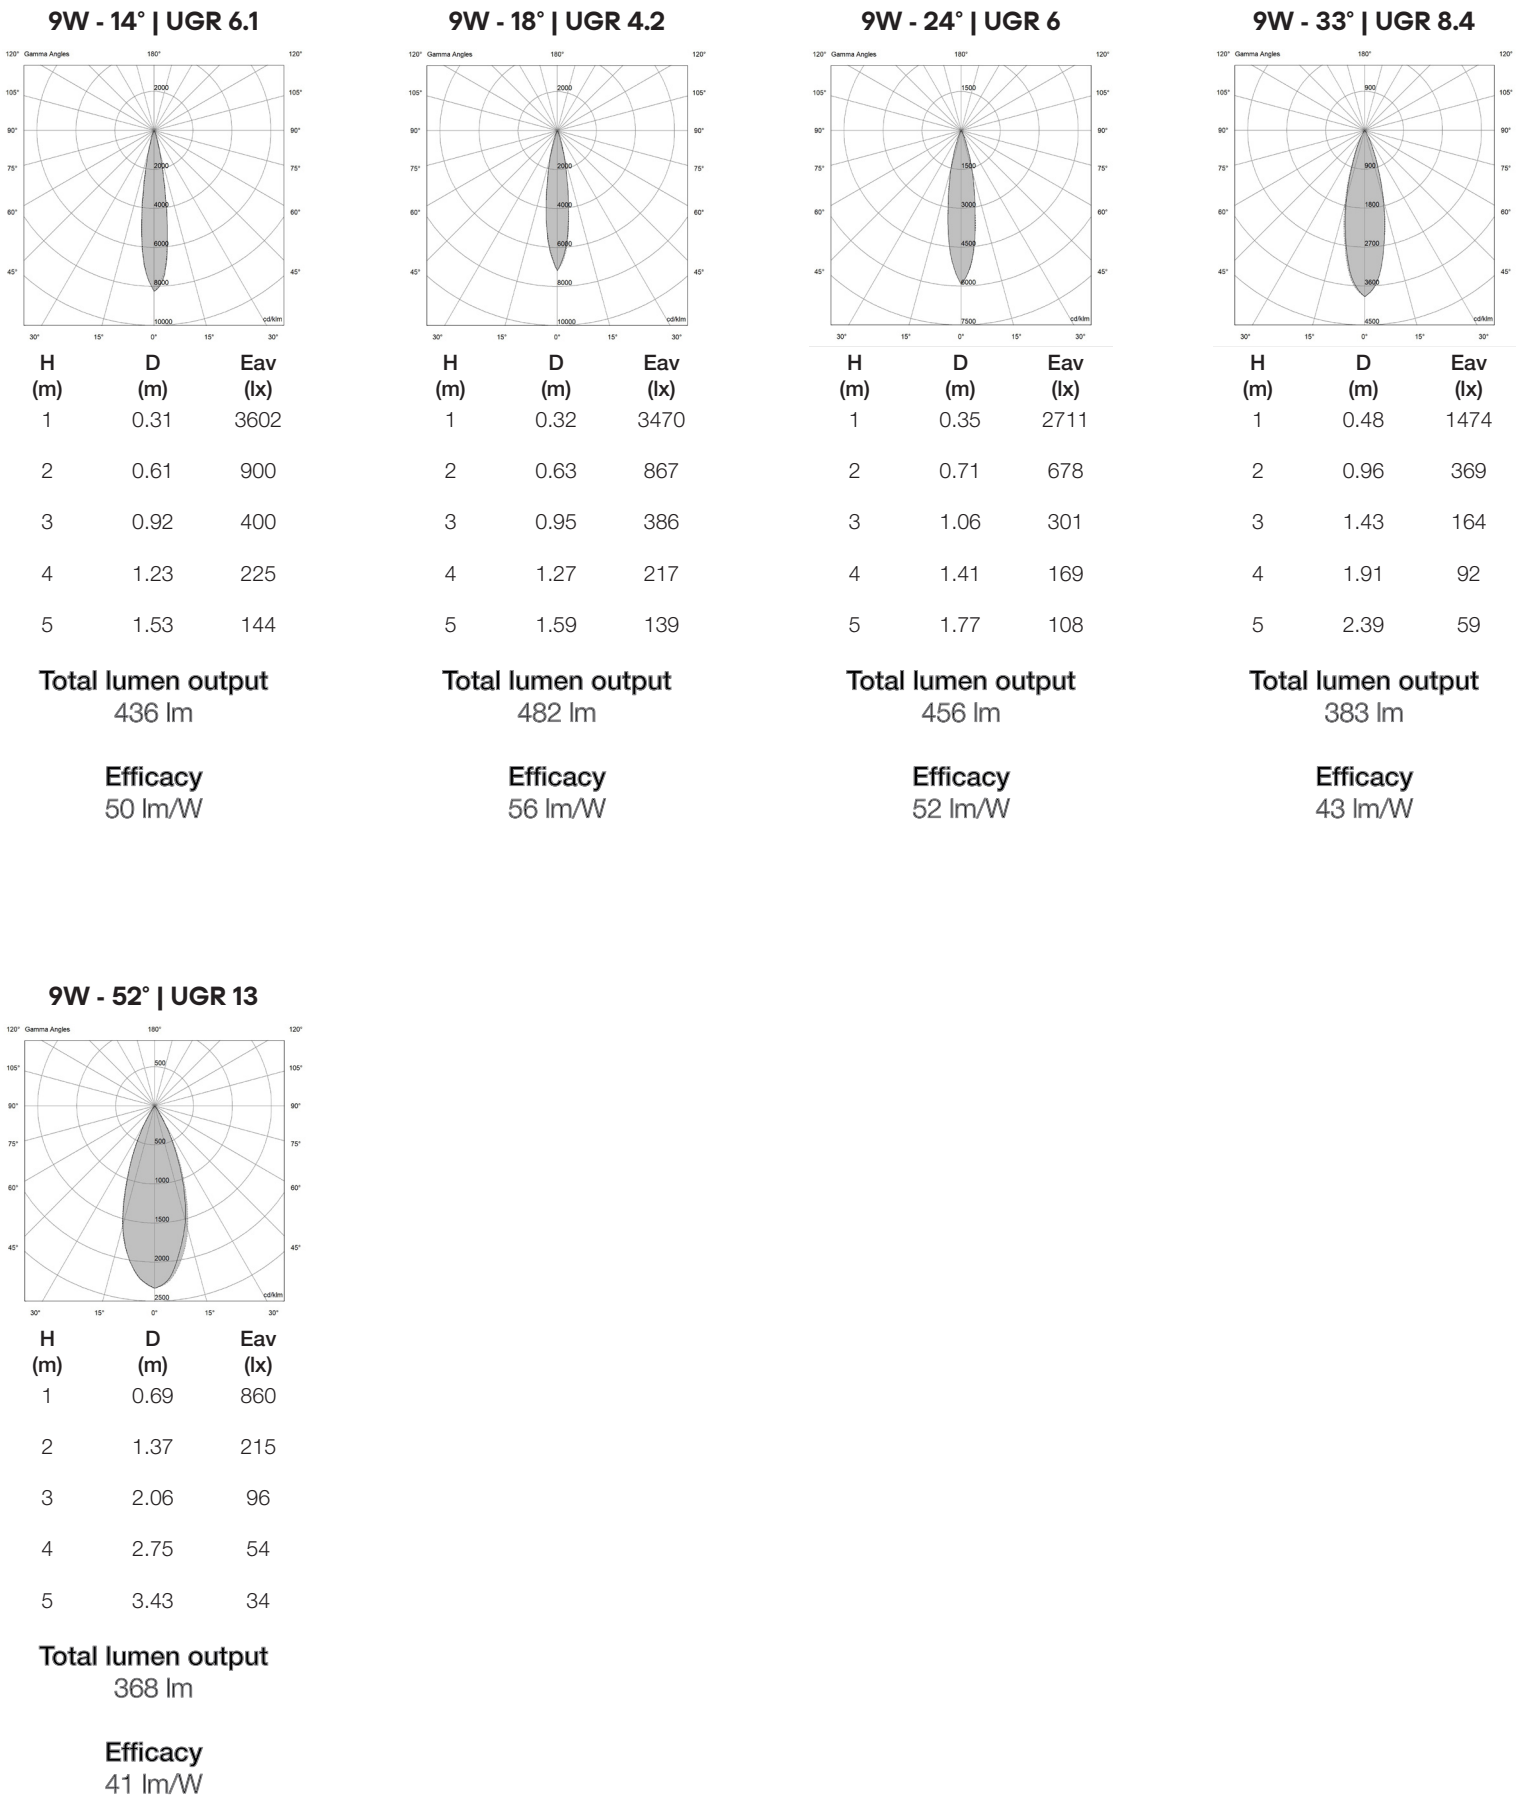


Ariel i IP67 Plug&Play

PHOTOMETRIC DATA (3000K CRI>90) - Prismatic filter

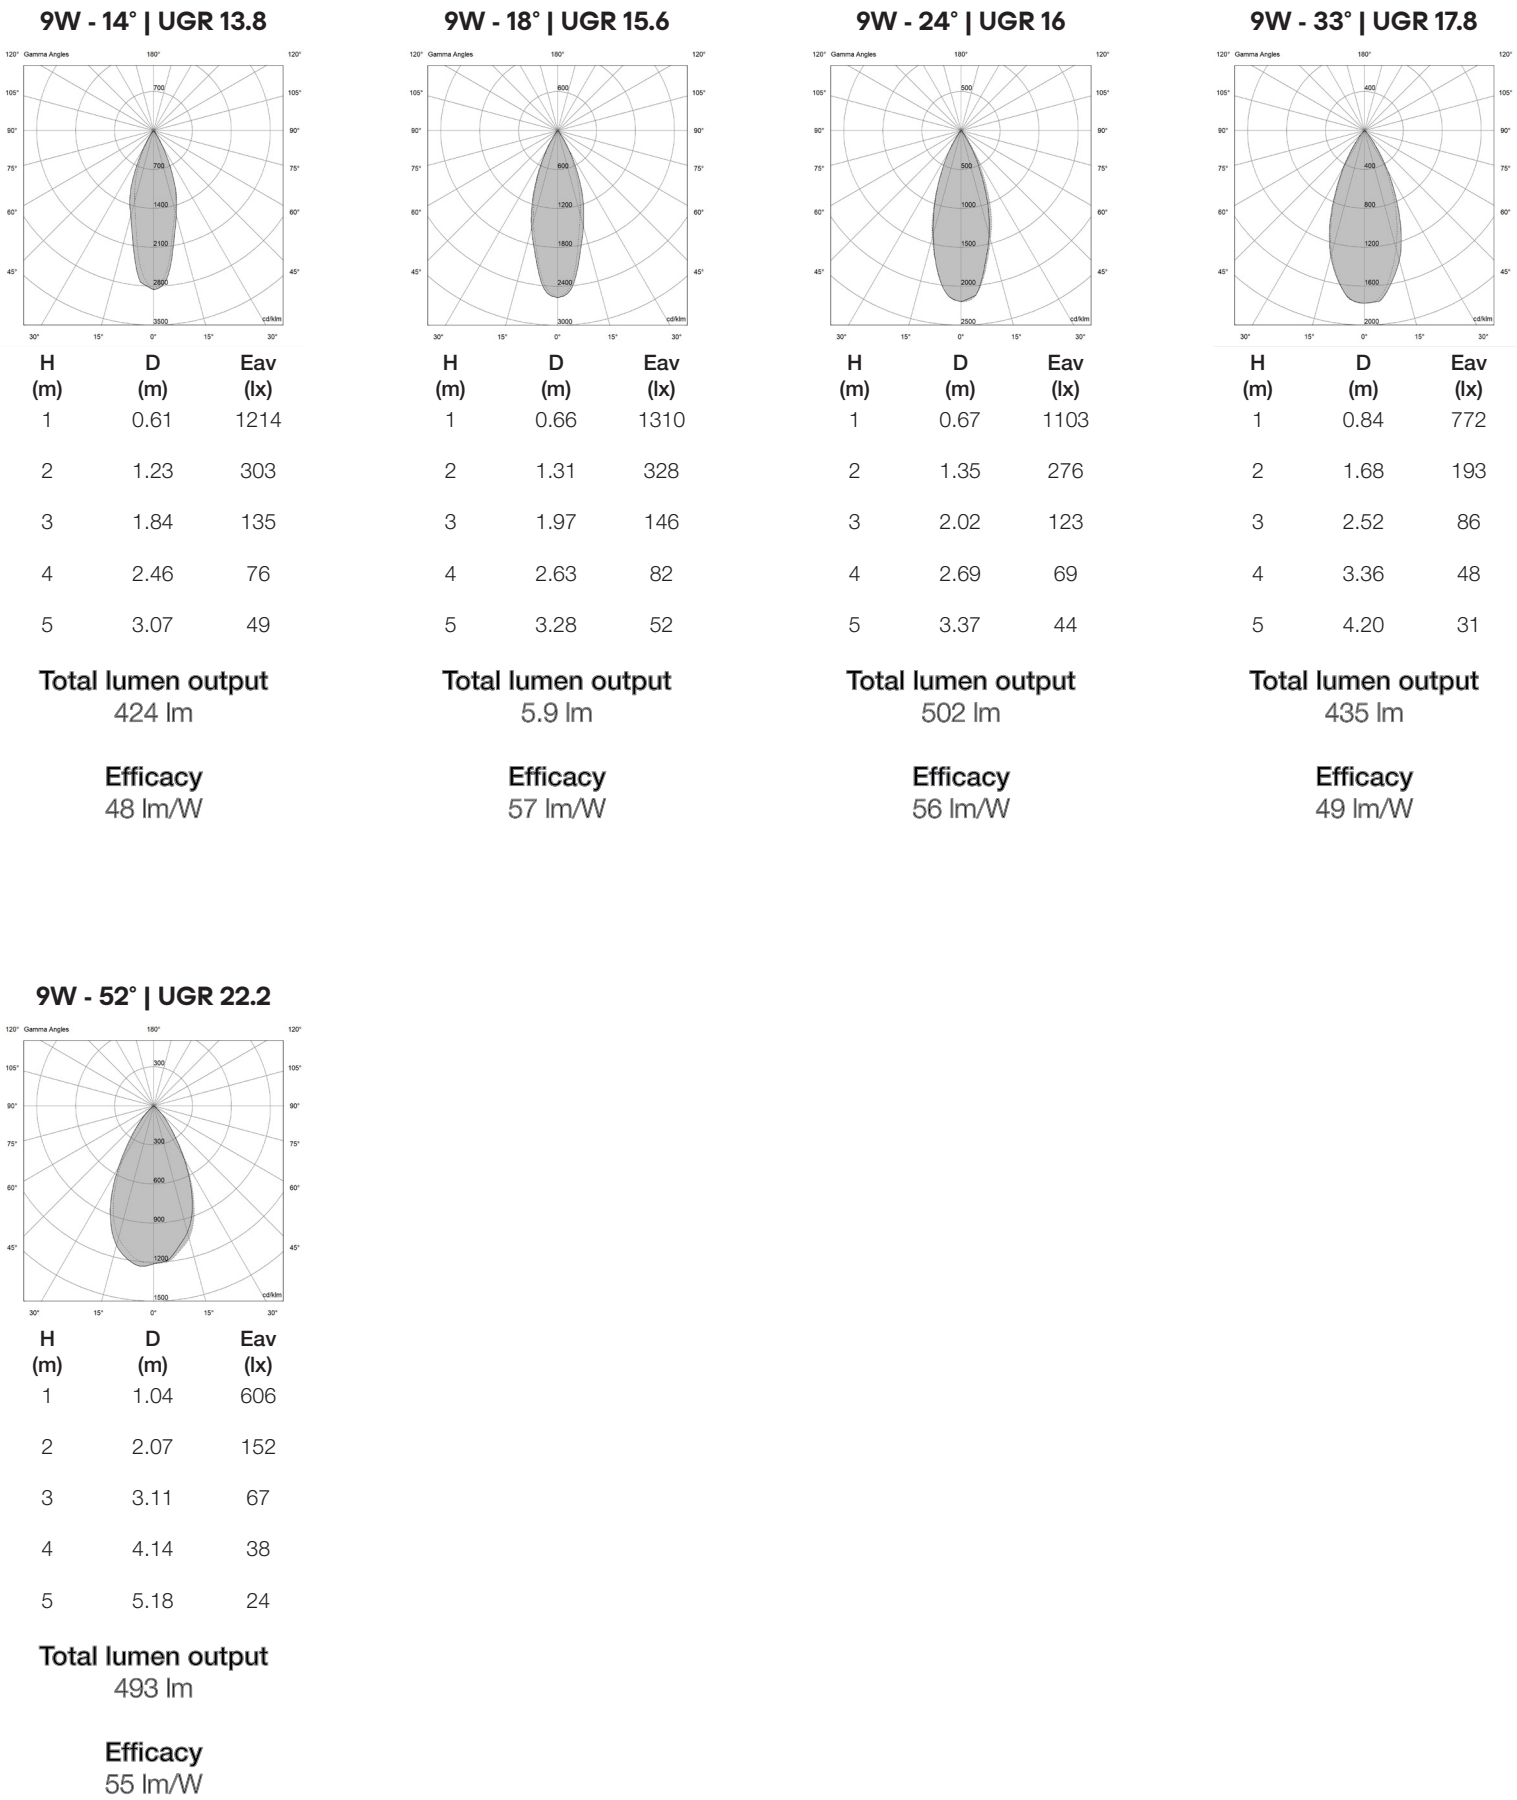

Ariel i IP67 Plug&Play

PHOTOMETRIC DATA (3000K CRI>90) - Softening filter

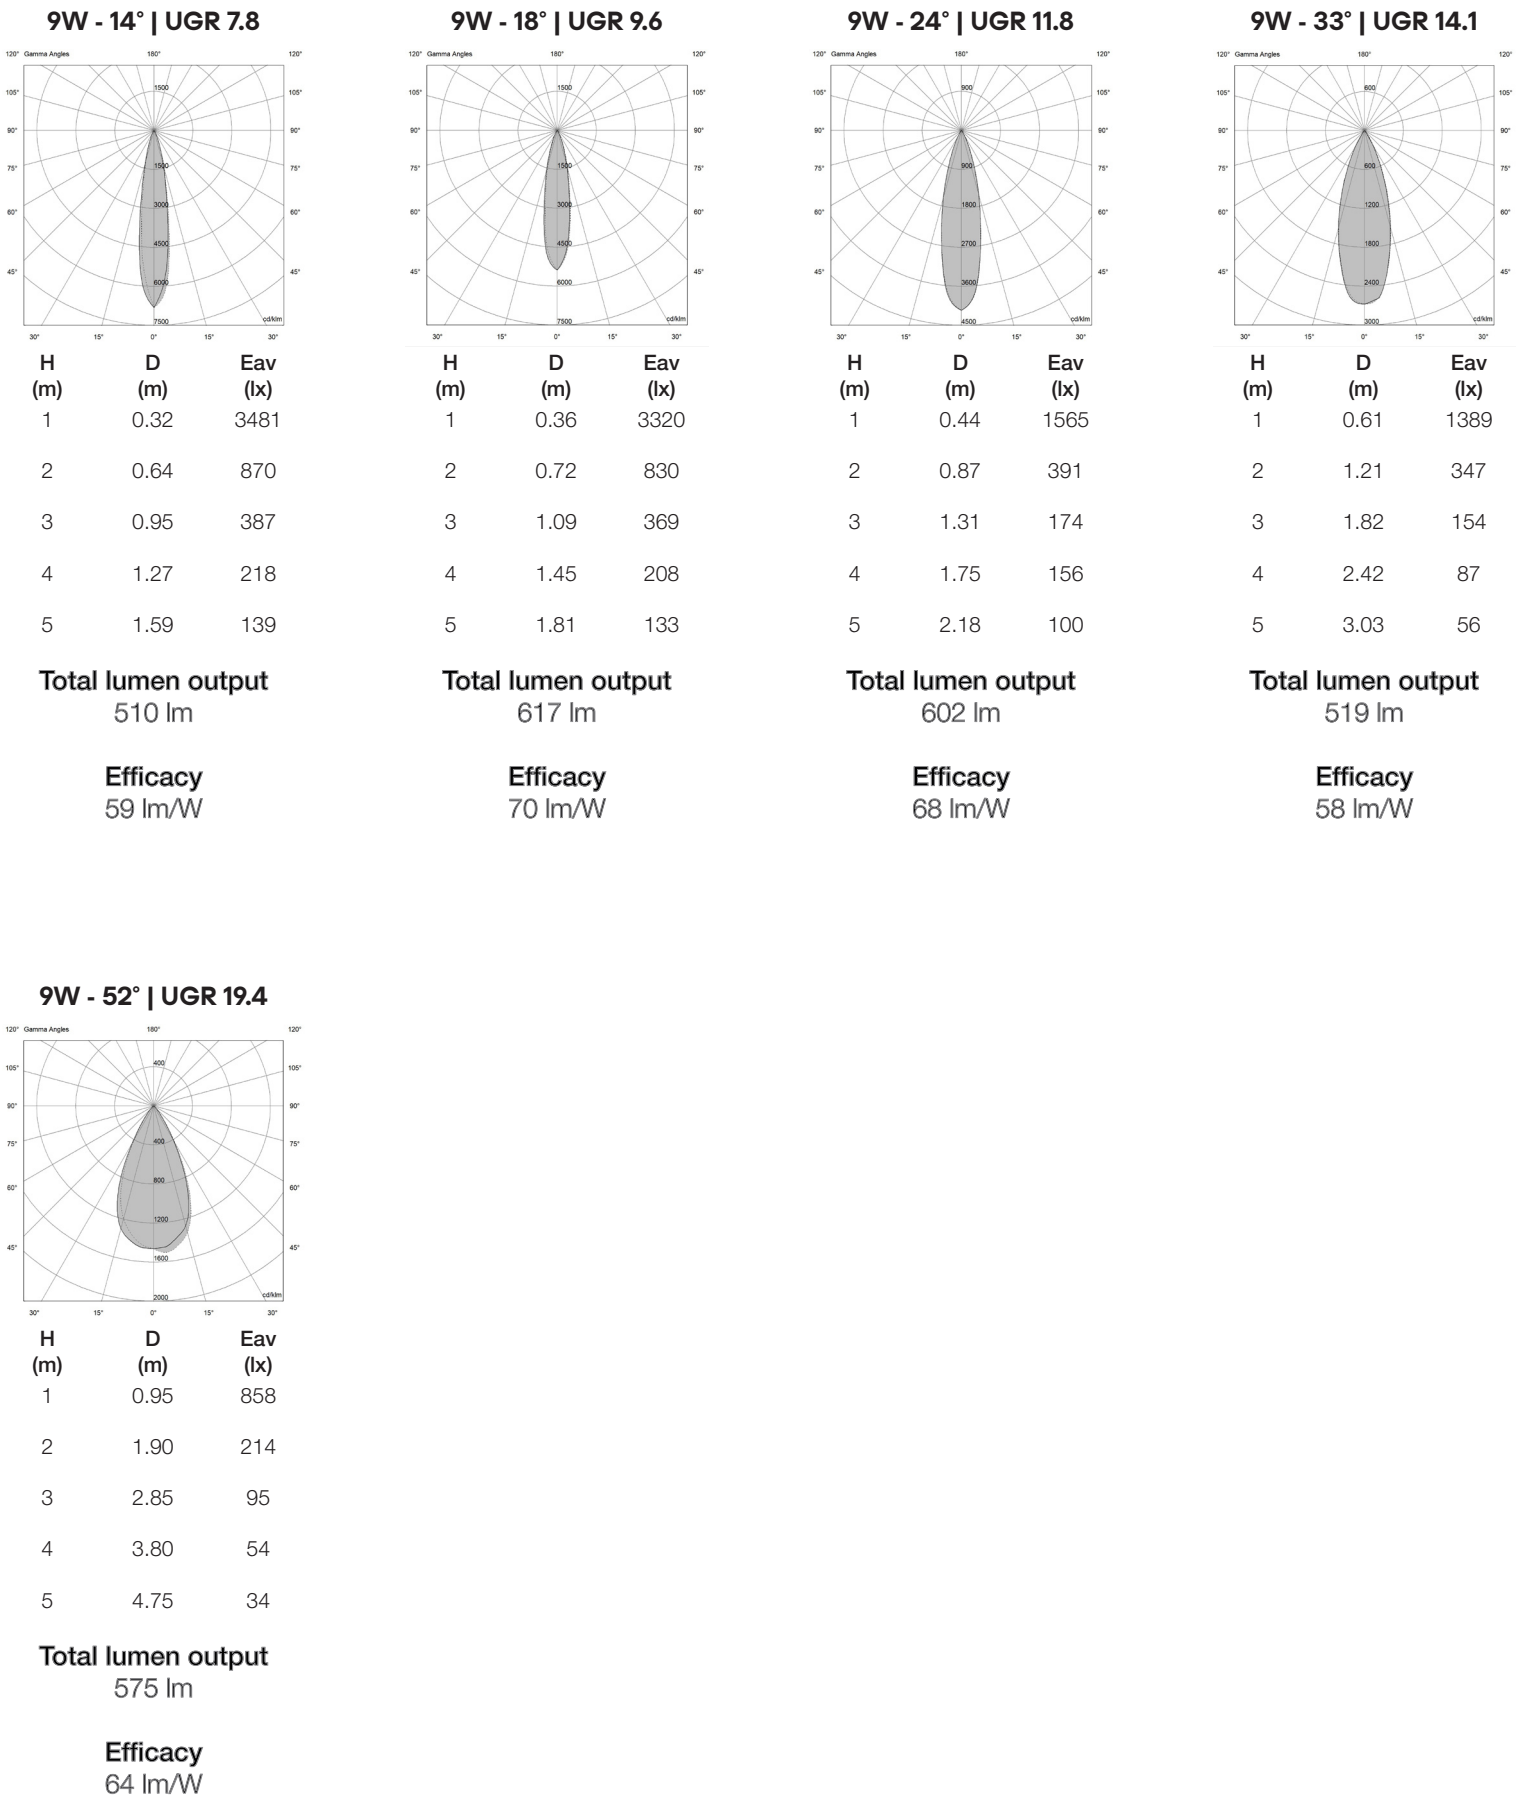

Ariel i IP67 Plug&Play

INTERCHANGEABLE ACCESSORIES

Plug&Play modules



2200K CRI>90
2400K CRI>90
2700K CRI>90
2700K CRI>95
3000K CRI>80
3000K CRI>90
3000K CRI>95
3500K CRI>90
3500K CRI>95
4000K CRI>90

Optical filters



Elliptical Filter
(A01182.80)



Hex Louver
(A01183.40)



Prismatic Filter
(A01184.80)




Softening Lens
(A01184.80)

Lenses



18° Lens
(A01192.80)
24° Lens
(A01193.80)
33° Lens
(A01194.80)
52° Lens
(A01195.80)

Decorative rings



Shiny Chrome
(A01272.10)



Gold Chrome
(A01272.10)



SatinGold
(A01272.80)




SatinNickel
(A01272.N0)




Black
(A01272.40)

INSTALLATION ACCESSORIES

Aluminium recessed box (A01416.40)




Watertight connector (A00387.40)



SUGGESTED REMOTE DRIVER

On/off:

CC14-F-500-PI / CV30-F-24-PI



Multifunction (DALI 2, 0/1-10V, PUSH):

CC20-M-500-P / CV25-D-24-PI

