


Ariel P IP67 Plug&Play



Projectors

● Plug&Play System

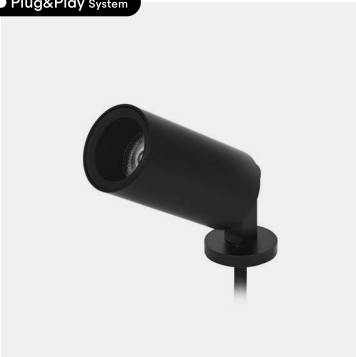

IP67

WIPS

500
600

24V

2 m


400 g

2

2,6

P&P

2,7

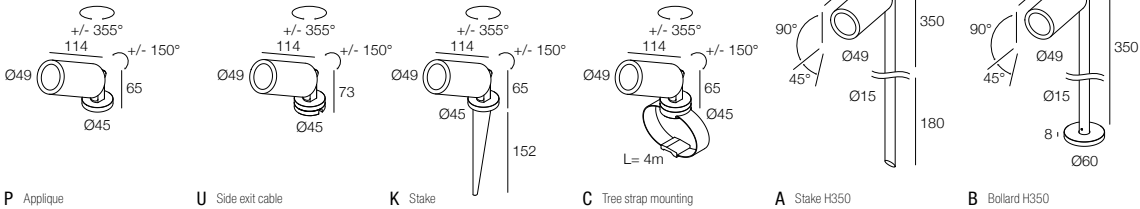

Ariel P IP67 Plug&Play

500 / 600mA Lumen Output 3000K	9W 500mA - 770 lm	11W 600mA - 1000 lm
14° Lens	7Q4552. _ _ _ _ _	7Q5006. _ _ _ _ _
18° Lens	784552. _ _ _ _ _	785006. _ _ _ _ _
24° Lens	7G4552. _ _ _ _ _	7G5006. _ _ _ _ _
33° Lens	7E4552. _ _ _ _ _	7E5006. _ _ _ _ _
52° Lens	754552. _ _ _ _ _	755006. _ _ _ _ _

24V Lumen Output 3000K	9,5W 24Vdc - 770 lm	12W 24Vdc - 1000 lm
14° Lens	7Q4720. _ _ _ _ _	7Q5007. _ _ _ _ _
18° Lens	784720. _ _ _ _ _	785007. _ _ _ _ _
24° Lens	7G4720. _ _ _ _ _	7G5007. _ _ _ _ _
33° Lens	7E4720. _ _ _ _ _	7E5007. _ _ _ _ _
52° Lens	754720. _ _ _ _ _	755007. _ _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			



SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI
600mA	CC20-F-600-PI
24Vdc	CV30-F-24-PI

INTERCHANGEABLE ACCESSORIES

Low glare visor
A00519._0

Low glare snoot
A00848._0

Waterlight connector
A00387.40

EXAMPLE CODE COMPOSITION

