

Ariel P IP67




Projectors



[1] 14° Lens not interchangeable

IP67 WIPS 500 700 24V 2 m 400 g 2 2,6 P&P TM 66

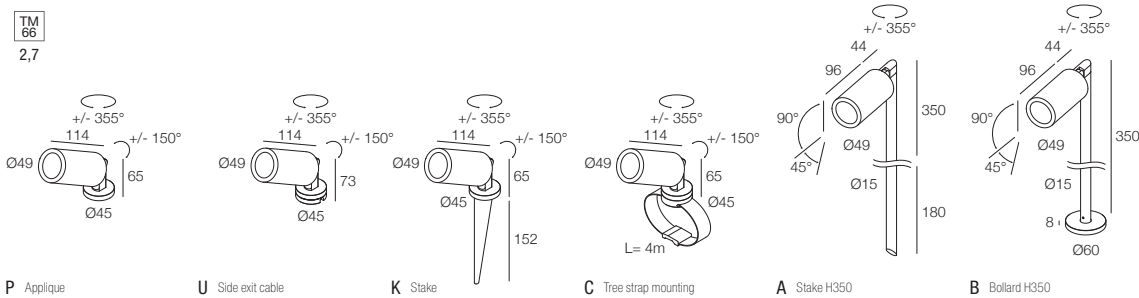

500 / 700mA	9W	13W
Lumen Output 3000K	500mA - 770 lm	700mA - 1000 lm
14° Lens [1]	7Q4551. _ _ _ _	7Q4564. _ _ _ _
18° Lens	784551. _ _ _ _	784564. _ _ _ _
24° Lens	7G4551. _ _ _ _	7G4564. _ _ _ _
33° Lens	7E4551. _ _ _ _	7E4564. _ _ _ _
52° Lens	754551. _ _ _ _	754564. _ _ _ _

24V	9,5W	13W
Lumen Output 3000K	24Vdc - 770 lm	24Vdc - 1000 lm
14° Lens [1]	7Q4718. _ _ _ _	7Q4719. _ _ _ _
18° Lens	784718. _ _ _ _	784719. _ _ _ _
24° Lens	7G4718. _ _ _ _	7G4719. _ _ _ _
33° Lens	7E4718. _ _ _ _	7E4719. _ _ _ _
52° Lens	754718. _ _ _ _	754719. _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● 4 Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	P Applique
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	U Side exit cable
● VC Fir Green	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	K Stake
● 4A Anthracite Gray	● 6 3000K	● N Satin Nickel	P Prismatic Filter	C Tree strap mounting
● MS Bright Brown	● W 3000K CRI > 90	● 1 Shiny Chrome	S Softening Lens	A Stake H350
● 3 Gray	● K 3500K CRI > 90			B Bollard H350
● A6 Gray White	● D 4000K CRI > 90			




SUGGESTED DRIVERS (not included)

500mA	CC14-F-500-PI	p. 704
700mA	CC14-F-700-PI	p. 705
24Vdc	CV30-F-24-PI	p. 708

ACCESSORIES




INTERCHANGEABLE ACCESSORIES  
p. 676



Low glare visor  
A00519\_0



Low glare snoot  
A00848\_0



Watertight connector p. 682  
A00387.40

