

Projectors



[1] 14° Lens not interchangeable

IP40

500
600


170 g

2

2,5

SD
CM

TM
66

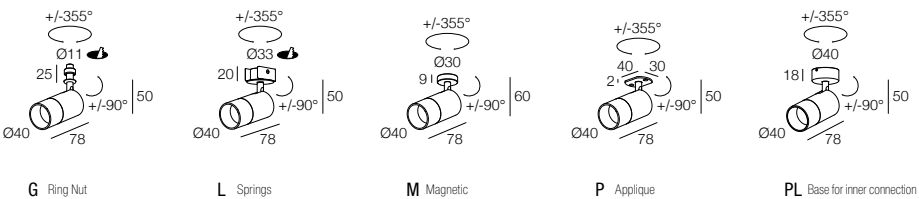

Ariel

500 / 600mA Lumen Output 3000K	9W 500mA - 900 lm	11W 600mA - 1100 lm
14° Lens [1]	7Q4597. _ _ _ _	7Q4998. _ _ _ _
18° Lens	784597. _ _ _ _	784998. _ _ _ _
24° Lens	7G4597. _ _ _ _	7G4998. _ _ _ _
33° Lens	7E4597. _ _ _ _	7E4998. _ _ _ _
52° Lens	754597. _ _ _ _	754998. _ _ _ _

FINISH	CCT	DECORATIVE RING	OPTICAL FILTER	FIXING
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter	G Ring Nut
● M8 Brown	● B2 2400K CRI > 90	● 8 Satin Gold	E Elliptical Filter	L Springs
● G3 Gray	● X 2700K CRI > 90	● I Gold Chrome	H Hex Louver	M Magnetic
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter	P Applique
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens	PL Base for inner connection
● A6 Gray White	● W 3000K CRI > 90			
● S Warm White	● W1 3000K CRI > 95			
● 7 White	● K 3500K CRI > 90			
	● K1 3500K CRI > 95			
	● D 4000K CRI > 90			



SUGGESTED DRIVERS (not included)

500mA	CC20-F-500-N	p. 284
600mA	CC20-F-600-N	p. 285

INTERCHANGEABLE ACCESSORIES



p. 260

EXAMPLE CODE COMPOSITION

