

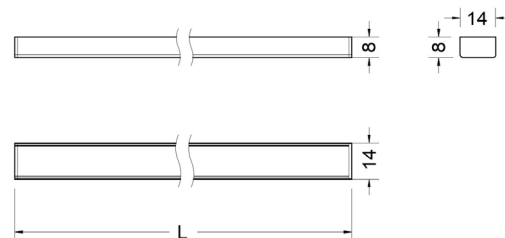


Armonia 8x14

Linear System | IP40 | Class III | Dimmable

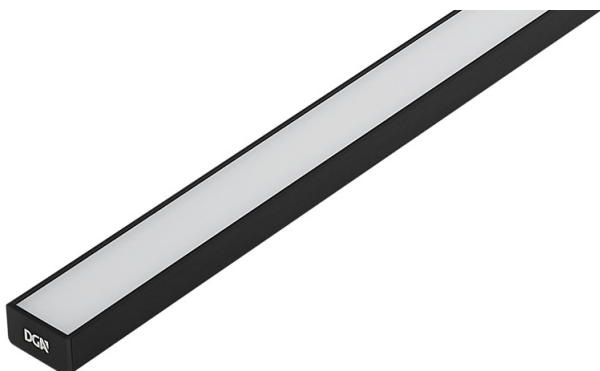

Integrated Fixing*



LIGHT SOURCE & OPTIC

Power

- 8W
- 12W
- 16W
- 19W
- 23W

Lens

- Transparent Cover, (6%)
- Opal Cover (25%)
- Black Ghost Cover (80%)

Beam Direction

Fixed, Symmetrical

Material

PMM

LED quantity

233

Binning

2 MacAdam step

Color temperature & quality

- 2200K
- 2500K
- 2700K CRI>90
- 3000K CRI>90
- 3500K CRI>90
- 4000K CRI>90

Lifetime

L85 >95.000 hrs

FIXTURE

Dimensions

L 14mm x H 8mm

004	007	010	013	016	019	022	025	028	031
034	037	040	043	046	049	052	055	058	061
064	067	070	073	076	079	082	085	088	091
094	097	100	103	106	109	112	115	118	121
124	127	130	133	136	139	142	145	148	151
154	157	160	163	166	169	172	175	178	181
184	187	190	193	196	199	202	205	208	211
214	217	220	223	226	229	232	235	238	241
244	247	250	253	256	259	262	265	268	271
274	277	280	283	286	289	292	295	298	
006	010	014	018	022	026	030	034	038	042
046	050	054	058	062	066	070	074	078	082
086	090	094	098	102	106	110	114	118	122
126	130	134	138	142	146	150	154	158	162
166	170	174	178	182	186	190	194	198	202
206	210	214	218	222	226	230	234	238	242
246	250	254	258	262	266	270	274	278	282
286	290	294	298						

WHITE

TUNABLE WHITE

Material

Aluminum

Body finishes

- Black
- Gray

Weight

130gr/m

Mounting

On surface

End caps

- Aluminum
- Transparent

Fixing*

- Magnetic fixing
- Double sided tape
- Without fixing (see accessories)

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)

Control

- On/off
- Push switch
- Phase Cut
- 0/1-10 V
- Casambi
- DALI


Cable exit

- Cap exit
- In&Out cap exit
- Left side exit
- In&Out side exit
- Right side exit
- Back exit
- Back in&out exit

Armonia 8x14

PHOTOMETRIC DATA (3000K CRI>90-Opal Cover)

8W/m - 110° | UGR 25

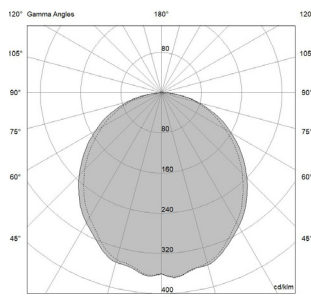


H (m)	D (m)	Eav (lx)
1	2.74	22
2	5.49	5
3	8.23	2
4	10.98	1
5	13.72	1

Total lumen output
508 lm

Efficacy
63 lm/W

12W/m - 110° | UGR 27

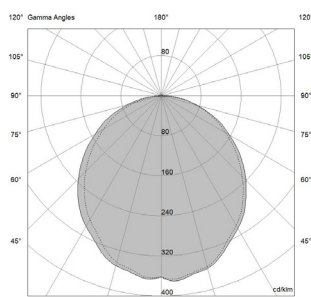


H (m)	D (m)	Eav (lx)
1	2.74	36
2	5.49	9
3	8.23	4
4	10.98	2
5	13.72	1

Total lumen output
869 lm

Efficacy
72 lm/W

16W/m - 110° | UGR 28

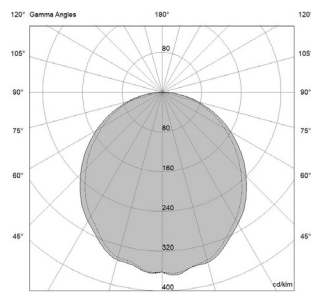


H (m)	D (m)	Eav (lx)
1	2.75	45
2	5.50	11
3	8.24	5
4	10.99	3
5	13.74	2

Total lumen output
1077 lm

Efficacy
67 lm/W

19W/m - 110° | UGR 29

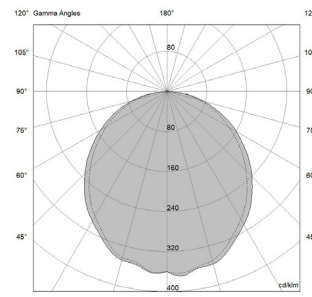


H (m)	D (m)	Eav (lx)
1	2.76	55
2	5.53	14
3	8.29	6
4	11.06	3
5	13.82	2

Total lumen output
1303 lm

Efficacy
69 lm/W

23W/m - 110° | UGR 30

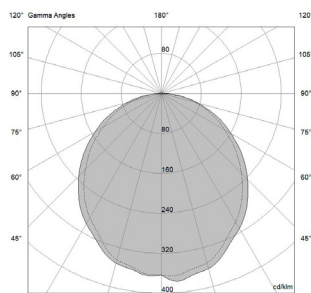

H (m)	D (m)	Eav (lx)
1	2.73	66
2	5.45	17
3	8.18	7
4	10.91	4
5	13.64	3

Total lumen output
1597 lm


Efficacy
69 lm/W

Armonia 8x14

INSTALLATION ACCESSORIES


Magnetic brackets

Only for Armonia 8x14 without fixing

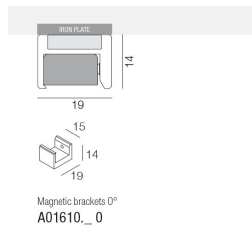


Brackets and screws

Only for Armonia 8x14 without fixing

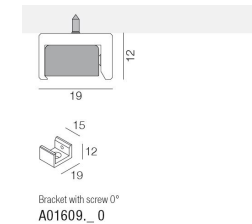

Mounting clips


Only for Armonia 8x14 without fixing

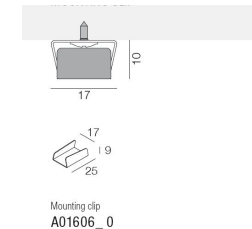

SUGGESTED REMOTE DRIVERS


On/Off :

CV70-F-24-N

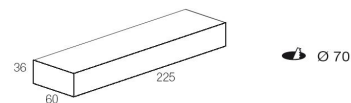

Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI

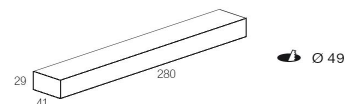

Other options upon request