
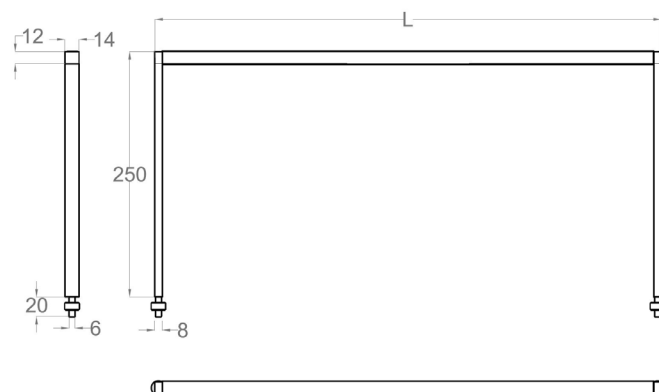


Armonia Bridge opal cover

Showcase Lighting | IP40 | Class III | Dimmable

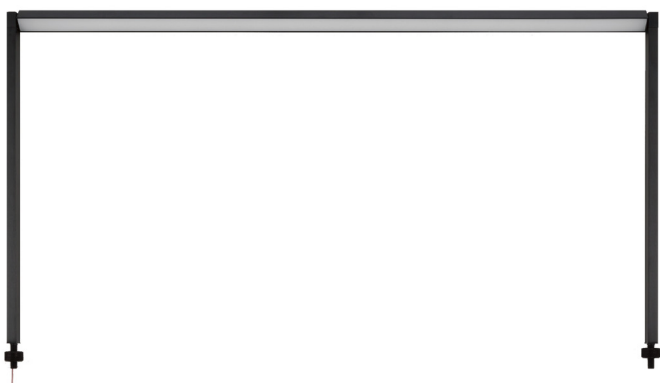

LIGHT SOURCE & OPTIC

Power

12W/m

25W/m

Lens

Opal Cover

Beam Direction

Adjustable: tilting +/- 355°,

Asymmetrical

Material

PMM

LED quantity

233 LED/m

Binning

2 MacAdam step

Color temperature & quality

2200K CRI>80

2500K CRI>80

2700K CRI>90

3000K CRI>90

3500K CRI>90

4000K CRI>90

5000K CRI>80

Lifetime

L85 >95.000 hrs

FIXTURE

Dimensions

L 14mm x H 12mm

031 034 037 040

043 046 049 052

055 058 061 064

067 070 073 076

079 082 085 088

091 094 097 100

103 106 109 112

115 118

Material

Aluminum

Body finishes

Black

Gray

Weight

350gr/m

Mounting

On top

Fixing

Ring nut: cut out Ø 6mm

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V


Casambi

DALI

Armonia Bridge opal cover


PHOTOMETRIC DATA (3000K CRI>90)

12W/m - 103° | UGR 27

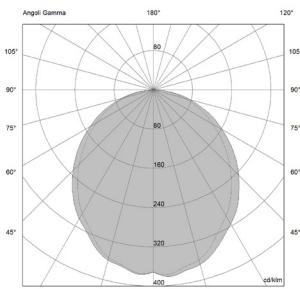

H (m)	D (m)	Eav (lx)
1	2.74	36
2	5.49	9
3	8.23	4
4	10.98	2
5	13.72	1

25W/m - 103° | UGR 29

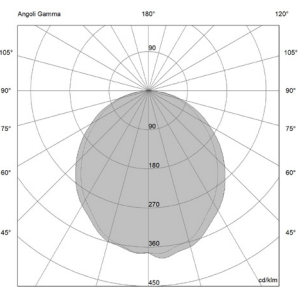

H (m)	D (m)	Eav (lx)
1	2.73	66
2	5.45	17
3	8.18	7
4	10.91	4
5	13.64	3

Total lumen output
668 lm

Efficacy
56 lm/W

Total lumen output
1218 lm


Efficacy
49 lm/W

Armonia Bridge opal cover

SUGGESTED REMOTE DRIVERS


On/Off :

CV70-F-24-N

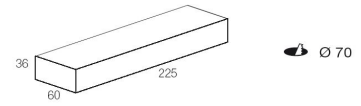

Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI



Other options upon request