

ARMONIA CURVA LENS

LIGHT SOURCE

LED quantity (each module)	2
Power max	30 W/m
Total lumen output (single module -3000K CRI>90)	3W each module: 10° - 127 lm 30° - 117 lm 40° - 118 lm 60° - 115 lm Elliptical lens – 118 lm
Efficacy lm/W (single module -3000K CRI>90)	3W each module: 10° - 42 lm/W 30° - 39 lm/W 40° - 39 lm/W 60° - 38 lm/W Elliptical lens – 39 lm/W
CRI	>80 – >90
LED Temperature	2200K - 2700K – 2700K CRI>90 - 3000K – 3000K CRI>90 – 4000K – 4000K CRI>90 - 5000K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	10° - 30° - 40° - 60°-elliptical lens
Beam direction	Adjustable +/-25°
Flux symmetry	Symmetrical, asymmetrical

FIXTURE

Material	Aluminum
Available finishes	Hard coat anodized: 3 - Gray 4 - Black
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Adjustable bracket magnetic fixing Adjustable bracket screw fixing

ELECTRICAL FEATURES



Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In parallel at 12Vdc
Class	III

MECHANICAL FEATURES


Dimensions (single module)	70 x 14 x 17 mm
Weight	260 gr/m
Installation	Wall, ceiling, floor mounting
Cut-out	-
Use	Indoor

ACCESSORIES

Visors	-
Filters	-
Box/ Frame	-
Fixing system	-

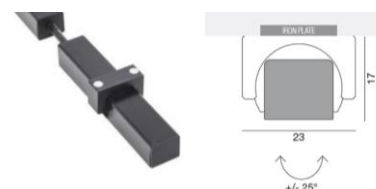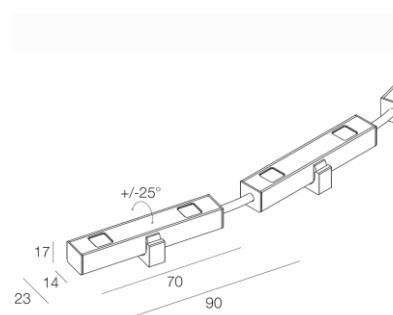

Magnetic joint

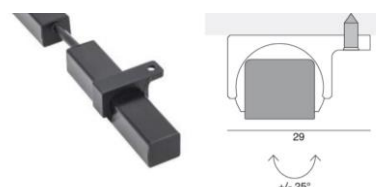

Joint with screw

PHOTOMETRIC DATA

10° Lens – 3W	30° Lens – 3W	40° Lens – 3W	60° Lens – 3W																																																																																																																
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>10°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.28</td><td>1060</td><td>687</td></tr> <tr> <td><u>2.00</u></td><td>0.56</td><td>265</td><td>172</td></tr> <tr> <td><u>3.00</u></td><td>0.83</td><td>118</td><td>76</td></tr> <tr> <td><u>4.00</u></td><td>1.11</td><td>66</td><td>43</td></tr> <tr> <td><u>5.00</u></td><td>1.39</td><td>42</td><td>27</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	10°				<u>1.00</u>	0.28	1060	687	<u>2.00</u>	0.56	265	172	<u>3.00</u>	0.83	118	76	<u>4.00</u>	1.11	66	43	<u>5.00</u>	1.39	42	27	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>30°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.42</td><td>424</td><td>265</td></tr> <tr> <td><u>2.00</u></td><td>0.87</td><td>106</td><td>66</td></tr> <tr> <td><u>3.00</u></td><td>1.30</td><td>47</td><td>29</td></tr> <tr> <td><u>4.00</u></td><td>1.73</td><td>27</td><td>17</td></tr> <tr> <td><u>5.00</u></td><td>2.16</td><td>17</td><td>11</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	30°				<u>1.00</u>	0.42	424	265	<u>2.00</u>	0.87	106	66	<u>3.00</u>	1.30	47	29	<u>4.00</u>	1.73	27	17	<u>5.00</u>	2.16	17	11	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>40°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.66</td><td>238</td><td>143</td></tr> <tr> <td><u>2.00</u></td><td>1.32</td><td>59</td><td>36</td></tr> <tr> <td><u>3.00</u></td><td>1.97</td><td>26</td><td>16</td></tr> <tr> <td><u>4.00</u></td><td>2.63</td><td>15</td><td>9</td></tr> <tr> <td><u>5.00</u></td><td>3.29</td><td>10</td><td>6</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	40°				<u>1.00</u>	0.66	238	143	<u>2.00</u>	1.32	59	36	<u>3.00</u>	1.97	26	16	<u>4.00</u>	2.63	15	9	<u>5.00</u>	3.29	10	6	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>60°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>1.04</td><td>136</td><td>73</td></tr> <tr> <td><u>2.00</u></td><td>2.08</td><td>34</td><td>18</td></tr> <tr> <td><u>3.00</u></td><td>3.12</td><td>15</td><td>8</td></tr> <tr> <td><u>4.00</u></td><td>4.16</td><td>9</td><td>5</td></tr> <tr> <td><u>5.00</u></td><td>5.21</td><td>5</td><td>3</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	60°				<u>1.00</u>	1.04	136	73	<u>2.00</u>	2.08	34	18	<u>3.00</u>	3.12	15	8	<u>4.00</u>	4.16	9	5	<u>5.00</u>	5.21	5	3
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
10°																																																																																																																			
<u>1.00</u>	0.28	1060	687																																																																																																																
<u>2.00</u>	0.56	265	172																																																																																																																
<u>3.00</u>	0.83	118	76																																																																																																																
<u>4.00</u>	1.11	66	43																																																																																																																
<u>5.00</u>	1.39	42	27																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
30°																																																																																																																			
<u>1.00</u>	0.42	424	265																																																																																																																
<u>2.00</u>	0.87	106	66																																																																																																																
<u>3.00</u>	1.30	47	29																																																																																																																
<u>4.00</u>	1.73	27	17																																																																																																																
<u>5.00</u>	2.16	17	11																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
40°																																																																																																																			
<u>1.00</u>	0.66	238	143																																																																																																																
<u>2.00</u>	1.32	59	36																																																																																																																
<u>3.00</u>	1.97	26	16																																																																																																																
<u>4.00</u>	2.63	15	9																																																																																																																
<u>5.00</u>	3.29	10	6																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
60°																																																																																																																			
<u>1.00</u>	1.04	136	73																																																																																																																
<u>2.00</u>	2.08	34	18																																																																																																																
<u>3.00</u>	3.12	15	8																																																																																																																
<u>4.00</u>	4.16	9	5																																																																																																																
<u>5.00</u>	5.21	5	3																																																																																																																
Elliptical lens – 3W																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>20°x 40°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.30</td><td>410</td><td>262</td></tr> <tr> <td><u>2.00</u></td><td>0.60</td><td>102</td><td>65</td></tr> <tr> <td><u>3.00</u></td><td>0.90</td><td>46</td><td>29</td></tr> <tr> <td><u>4.00</u></td><td>1.20</td><td>26</td><td>16</td></tr> <tr> <td><u>5.00</u></td><td>1.50</td><td>16</td><td>10</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	20°x 40°				<u>1.00</u>	0.30	410	262	<u>2.00</u>	0.60	102	65	<u>3.00</u>	0.90	46	29	<u>4.00</u>	1.20	26	16	<u>5.00</u>	1.50	16	10																																																																																							
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
20°x 40°																																																																																																																			
<u>1.00</u>	0.30	410	262																																																																																																																
<u>2.00</u>	0.60	102	65																																																																																																																
<u>3.00</u>	0.90	46	29																																																																																																																
<u>4.00</u>	1.20	26	16																																																																																																																
<u>5.00</u>	1.50	16	10																																																																																																																

NOTES

Available lengths (cm)

007 016 025 034 043 052 061 070 079 088 097 106 115 124 133 142 151 160 169 178