


ARMONIA LENTI







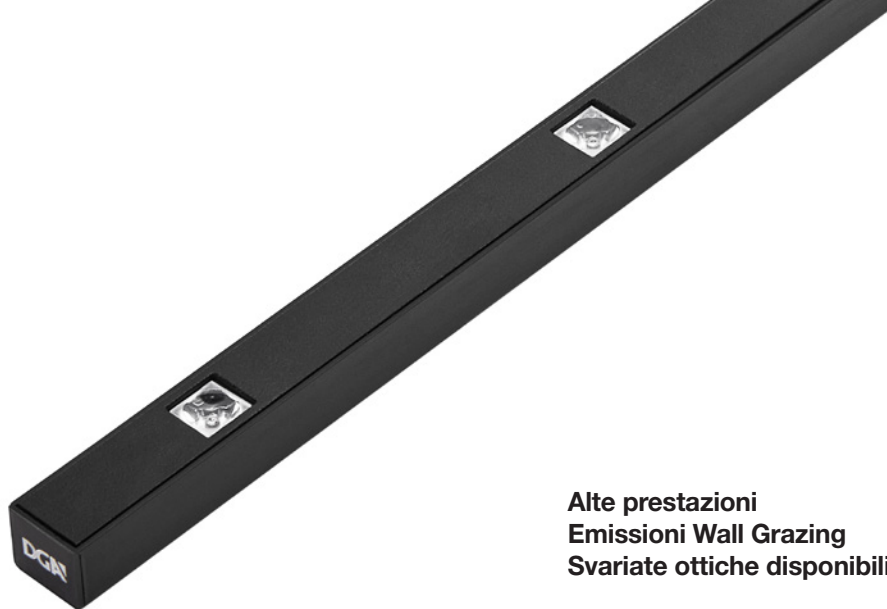








-  IP40
-  Class III
-  Montaggio a parete, soffitto, pavimento
Wall, ceiling, floor mounting
-  Collegare in serie 350mA o 700mA
Connect in series at 350mA or 700mA
-  225 gr/m
-  Altamente riciclabile
Highly recyclable




**Alte prestazioni
Emissioni Wall Grazing
Svariate ottiche disponibili**

High performance
Wall Grazing Emissions
Multiple optics available

ARMONIA LENTI

	12W/m 350mA	24W/m 700mA	Finiture Finish	Colore LED LED Colour
Lumen Output 3000K	1600lm/m	1600lm/m		
Senza fissaggio Without fixing				
 10° Lens	A831-_-_-_-_-	A834-_-_-_-_-	■ 4 Nero - Black	<ul style="list-style-type: none"> ■ U 2200K ■ Y 2700K ■ X 2700K CRI > 90 ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K ■ D 4000K CRI > 90 ■ 1 5000K
 30° Lens	A861-_-_-_-_-	A864-_-_-_-_-		
 40° Lens	A841-_-_-_-_-	A844-_-_-_-_-		
 60° Lens	A851-_-_-_-_-	A854-_-_-_-_-		
 Lente ellittica Elliptical lens	A871-_-_-_-_-	A874-_-_-_-_-		
Fissaggio con magneti Magnets fixing				
 10° Lens	A832-_-_-_-_-	A835-_-_-_-_-		
 30° Lens	A862-_-_-_-_-	A865-_-_-_-_-		
 40° Lens	A842-_-_-_-_-	A845-_-_-_-_-		
 60° Lens	A852-_-_-_-_-	A855-_-_-_-_-		
 Lente ellittica Elliptical lens	A872-_-_-_-_-	A875-_-_-_-_-		
Fissaggio con biadesivo Double sided tape fixing				
 10° Lens	A833-_-_-_-_-	A836-_-_-_-_-		
 30° Lens	A863-_-_-_-_-	A866-_-_-_-_-		
 40° Lens	A843-_-_-_-_-	A846-_-_-_-_-		
 60° Lens	A853-_-_-_-_-	A856-_-_-_-_-		
 Lente ellittica Elliptical lens	A873-_-_-_-_-	A876-_-_-_-_-		



Lunghezze ottimizzate (cm)
Optimized lengths (cm)

017 (2 LED) 033 (4LED) 048(6LED) 064 (8LED) 080 (10LED) 096 (12LED) 112 (14LED) 128 (16LED) 144 (18LED) 160 (20LED)

EXAMPLE CODE COMPOSITION
12345-
Length in cm
16 cm step
min 017 - max 160


LED COLOUR	FINISH
------------	--------

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)


350mA CC20-F-350-N
700mA CC20-F-700-N

ELEMENTI DI FISSAGGIO
FIXING ELEMENTS


Specifiche tecniche
Technical data



Staffa con vite
Bracket with screw
A00494-_ 0



Staffa magnetica
Magnetic bracket
A00533-_ 0



Clip di fissaggio a molla
Mounting clip
A00705-_ 0