

## LIGHT SOURCE

LED quantity	1
Power max	30 W
Total lumen output (3000K)	1015 lm (8°) – 1355 lm (45°)
Efficacy lm/W (3000K)	34 lm/W (8°) – 45 lm/W (45°)
LOR (3000K)	34% (8°) – 44% (45°)
CRI	>80 - >90
LED Temperature (K)	2700 K – 3000 K – 3000K CRI>90 – 4000 K
Average operational life	50.000 hours

## OPTIC

Material	Optical glass
Available optics	Zoom optic 8° - 45°
Beam direction	Adjustable +/- 90°, rotating +/- 355°
Flux symmetry	Symmetrical
Accessories	-

## LED FIXTURE

Material	Aluminum
Finish	Painted (Black, White, All white)
Available finishes	Black, White, All white
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-



## ELECTRICAL FEATURES

Driver	Built-in driver, provided with Eurostandard track connector
Dimmable	No
For emergency lighting	-
Connection in	In parallel at 220-240Vac
Class	II


## MECHANICAL FEATURES

Dimensions (mm)	Ø80 x 140 (cylinder only)
Weight	1050 gr
Mounting	Wall, ceiling mounting
Cut-out (mm)	-
Use	Indoor

## NOTES

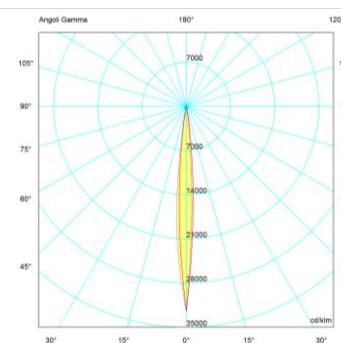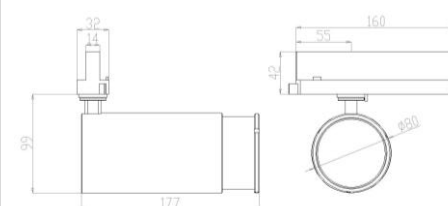

8°

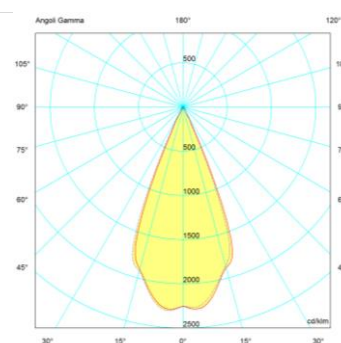

45°