


Circo 3

Small downlights | IP40 | Class III | Dimmable

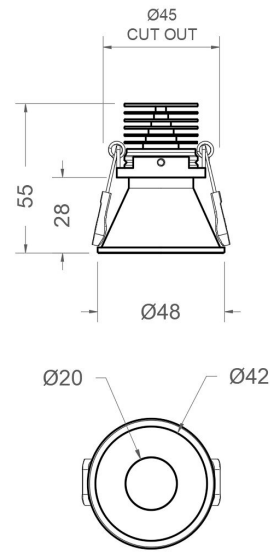

LIGHT SOURCE & OPTIC

Power

3W

Lens

15°
30°
60°
elliptical lens

Beam Direction

Fixed, Symmetrical/Asymmetrical

Material

PMMA

LED quantity

3

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

Lifetime

(L90) >60.000 hrs

FIXTURE

Dimensions

Ø 48mm x H 55mm

Material

Aluminium

Body finishes

White (RAL 9003)

Weight

65gr

Mounting

Recessed: cut out Ø 45mm

Fixing

Springs

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
350 mA
Typical Vf= 3x3V

Driver requirement

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Circo 3

PHOTOMETRIC DATA (3000K CRI>80)

3W - 15° | UGR 18

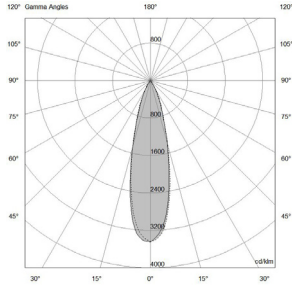


H (m)	D (m)	Eav (lx)
1	0.47	733
2	0.95	183
3	1.42	81
4	1.89	46
5	2.37	29

Total lumen output
338 lm

Efficacy
113 lm/W

3W - 30° | UGR 21

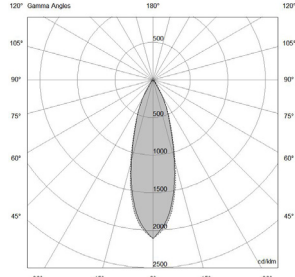


H (m)	D (m)	Eav (lx)
1	0.53	643
2	1.05	161
3	1.58	71
4	2.10	40
5	2.63	26

Total lumen output
319 lm

Efficacy
106 lm/W

3W - 60° | UGR 23

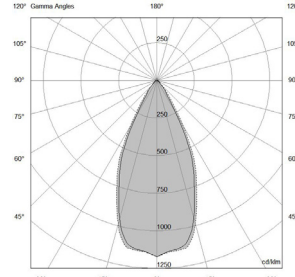


H (m)	D (m)	Eav (lx)
1	0.88	189
2	1.75	47
3	2.63	21
4	3.51	12
5	4.39	8

Total lumen output
288 lm

Efficacy
96 lm/W

3W - 25°x45° | UGR 24

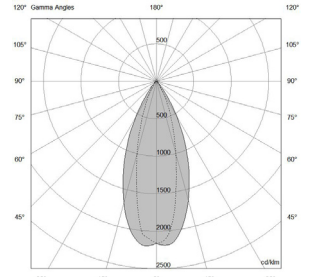

H (m)	D (m)	Eav (lx)
1	0.82	440
2	1.64	110
3	2.46	49
4	3.28	27
5	4.10	18



Total lumen output
334 lm

Efficacy
111 lm/W



SUGGESTED REMOTE DRIVERS

On/Off :

CC20-F-350-N

 Ø 55**Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):**

CC25-DM-350-N

 Ø 55

Other options upon request