






discover more

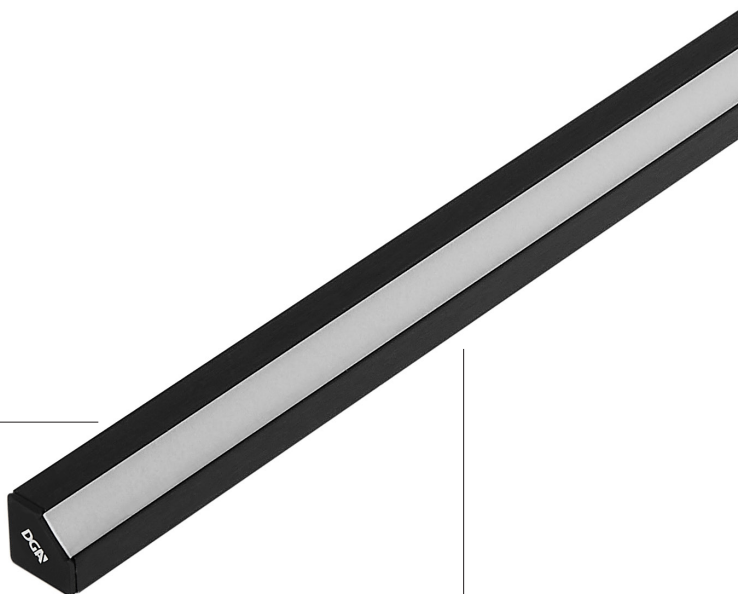


COVER




TRS
Transparent Cover
6%



OPL
Opal Cover
25%




MLK
Milky Cover
32%




BLK
Black Ghost Cover
80%

END CAP




A
Aluminum




T
Transparent


EXIT CABLE




A
Cap Exit Left




AB
In&Out Cap Exit




B
Cap Exit Right




C
Left Side Exit




CD
In&Out Side Exit




D
Right Side Exit



E
Back Exit Left




EF
Back In&Out Exit



F
Back Exit Right


FIXING ELEMENTS



M
Magnetic Fixing




B
Double Sided Tape




N
Without Fixing

FIXING

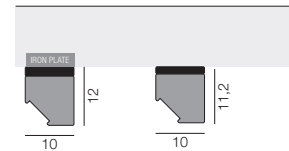


M
Magnetic Fixing

B
Double Sided Tape



Iron plate for **M** Magnetic Fixing
A01745.H0

Asymmetric Linear IP40

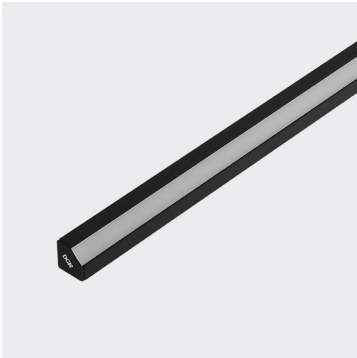


IP40

24Vdc

170 g/m

2



Lumen Output 3000K CRI > 90
23W/m - Opal Cover - Finish Gray: 1340 lm/m

CODE
LNG1-



--	--	--	--	--	--	--	--	--	--

POWER	LENGHT (cm)										COVER	END CAP	EXIT CABLE	FIXING	FINISH	CCT
08 8W/m	004	007	010	013	016	019	022	025	028	031	TRS	A	A	M	4	U
12 12W/m	034	037	040	043	046	049	052	055	058	061	OPL	T	AB	B	3	Q
16 16W/m	064	067	070	073	076	079	082	085	088	091	MLK		B	N		X
19 19W/m	094	097	100	103	106	109	112	115	118	121	BLK		C			W
23 23W/m	124	127	130	133	136	139	142	145	148	151			CD			K
	154	157	160	163	166	169	172	175	178	181			D			D
	184	187	190	193	196	199	202	205	208	211			E			
	214	217	220	223	226	229	232	235	238	241			EF			
	244	247	250	253	256	259	262	265	268	271			F			
	274	277	280	283	286	289	292	295	298							

Custom lenghts upon request


ACCESSORIES (only for N without fixing)

BRACKETS WITH SCREWS



Bracket with screw 0°
A00784._ 0

MOUNTING CLIP



Mounting clip
A00713._ 0

SUGGESTED DRIVERS (not included)