


# Cometa S8 230V

Suspension | IP40 | Class II | Not dimmable

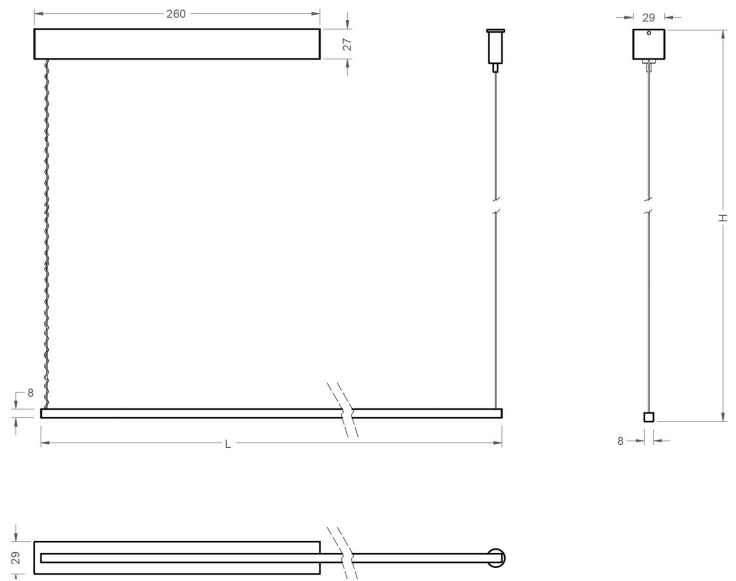

## LIGHT SOURCE & OPTIC

### Power

12W/m  
25W/m

### Emission

Diffused

### Beam Direction

Fixed, Symmetrical

### Material

PMM

### LED quantity

233

### Binning

2 MacAdam step

### Color temperature & quality

2200K CRI>80  
2500K CRI>80  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90

### Lifetime

L85 >95.000 hrs

## FIXTURE

### Dimensions

S 29mm x H 3000mm

Lengths available:

097	100	103	106	109	112	115	118
121	127	133	139	145	151	157	163
169	175	181	187	193	199	202	205
208	211	214	217	220	223	226	229
232	235	238	241	244	247	250	253
256	259	262	265	268	271	274	277
280	283	286	289	292	295	298	

### Material

Aluminium

### Body finishes

Black

### Weight

400gr/m

### End caps

Aluminium  
Transparent

### Mounting

On surface

### Fixing

Screws

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power Supply

Main Voltage: 220-240 Vac

### Driver requirement

Built-in


### Control

On/off

# Cometa S8 230V


PHOTOMETRIC DATA (3000K CRI>90-Opal cover)

12W/m - 105° | UGR 25



H (m)	D (m)	Eav (lx)
1	2.54	52
2	5.09	13
3	7.63	6
4	10.18	3
5	12.72	2

25W/m - 105° | UGR 27



H (m)	D (m)	Eav (lx)
1	2.54	94
2	5.09	23
3	7.63	10
4	10.17	6
5	12.72	4

Total lumen output  
750 lm

Efficacy  
63 lm/W

Total lumen output  
1340 lm

Efficacy  
54 lm/W