

Eclissi

Steps light | IP40 | Class III | Dimmable



Eclissi 360






Eclissi 180






Eclissi 90



Eclissi 90x2



Applique version

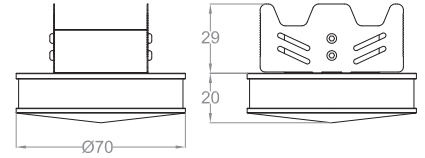

Springs version

LIGHT SOURCE & OPTIC

Power

4W

Emission

Diffuse

Beam Direction

Fixed, Symmetrical

Material

Methacrylate

LED quantity

35

Binning

2 MacAdam Steps

Color temperature & quality

2200K CRI>80

2700K CRI>80

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

Lifetime (Ta 25°)

L70 >54.000 hrs

Output (3000K CRI>90)

369 lm

FIXTURE

Dimensions

Ø 70mm x H 24mm

Material

Aluminium

Body finishes

PVD Satin Black

PVD Polished Black

PVD Gold Chrome

PVD Satin Gold

PVD Rose gold

PVD Shiny Chrome

Champagne gold

Dark bronze

Titanium

Weight

220gr

Mounting

On wall surface

Fixing

Applique

Springs (cut out Ø 44mm)

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V

Casambi

DALI

Eclissi


PHOTOMETRIC DATA (3000K CRI>90)

4W - 90°	4W - 90°x2	4W - 180°	4W - 360°
Total lumen output 32 lm	Total lumen output 64 lm x 2	Total lumen output 58 lm	Total lumen output 116 lm
Efficacy 8 lm/W	Efficacy 16 lm/W	Efficacy 15 lm/W	Efficacy 29 lm/W

INSTALLATION ACCESSORIES

Junction box


Necessary element for applique installation at solid wall: please specify always 1 frame for each fixture in the purchase order



SUGGESTED REMOTE DRIVERS

On/Off :


CV20-F-24-N



Ø 60

Multifunction :

CV20-M-24-N



Ø 44

Other options upon request