


Solovetro Series

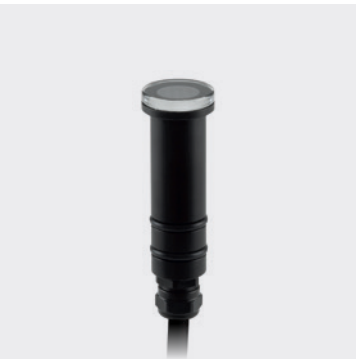

Hex louver inclusive

IP67

WIPS

350

500


1 m

50 g

2

UL

LISTED



<div>350 / 500mA</div> <div>Lumen Output 3000K CRI > 90</div>	<div>1W</div> <div>350mA - 60 lm</div>	<div>2W</div> <div>500mA - 75 lm</div>
15° Lens	7A3681._.-UL	7A3682._.-UL
25° Lens	7G3681._.-UL	7G3682._.-UL
40° Lens	743681._.-UL	743682._.-UL
Frosted Glass	713681._.-UL	713682._.-UL

FINISH	CCT
4 Black	U 2200K
Z Champagne Gold	X 2700K CRI > 90
3 Gray	W 3000K CRI > 90
	9 4000K



SUGGESTED DRIVERS (not included)

350mA	CC36-R-350-NF	p. 244
500mA	CC36-R-500-NF	p. 245

ACCESSORIES

Ø30

[1 1/8"]

96

[3 3/4"]

Ø26

[1"]

Recessed box in aluminum with edge

A00484._0

Ø24

[1"]

7

[1/4"]

137

[5 3/8"]

Ø100

[3 7/8"]

Recessed box in plastic with closure cap

A00479.40

50

[2"]

Ø18

[3/4"]

Spring mounting support

A00315.60

90

[3 1/2"]

100

[3 7/8"]

15

[5/8"]

Removing tool

A01295.60

EXAMPLE CODE COMPOSITION

123456.	-UL
	CCT
	FINISH