


Kumi IP67 double light emission

Surface lighting | IP67 | Class II | Not dimmable

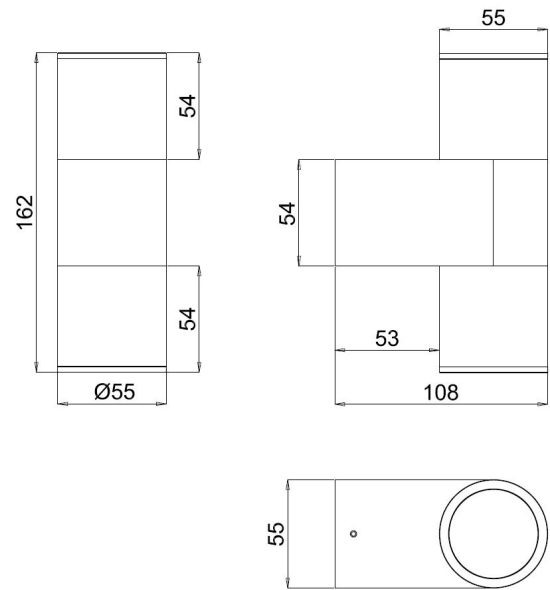

LIGHT SOURCE & OPTIC

Power
6Wx2

Lens
10°
30°

Beam Direction
Fixed

Material
PMMA+glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>80
3000K CRI>80/90
3500K CRI>80
4000K CRI>80

Lifetime (Ta 25°)
L90 >60.500 hrs

FIXTURE

Dimensions
L108mm x D55mm x H162mm

Material
Aluminium

Body finishes
Black
Anthracite Grey (RAL 7016)
Bright brown (RAL 4061)
Intense Bronze
Gray
White (RAL 9003)

Weight
970gr

Mounting
Wall Mounting

Fixing
Applique

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Main Voltage:
220-240Vac

Driver requirement
Built-in

Control
On/off

Feature
Water Infiltration Protection System

Kumi IP67 double light emission

PHOTOMETRIC DATA (3000K CRI>80)

