


Kumi IP67 single light emission

Surface lighting | IP67 | Class II | Not dimmable

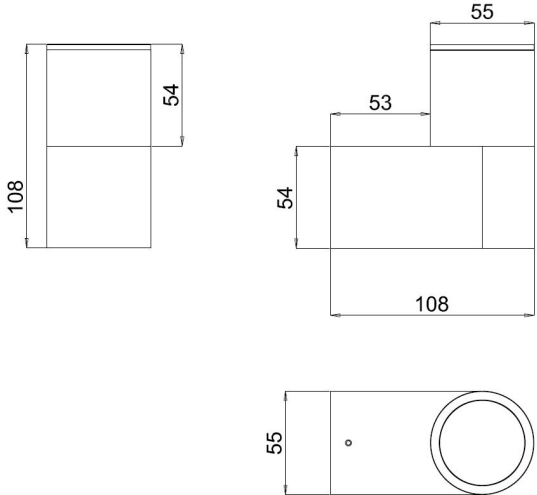

LIGHT SOURCE & OPTIC

- Power**
6W
- Lens**
10°
30°
- Beam Direction**
Fixed
- Material**
PMMA+glass
- LED quantity**
1
- Binning**
2 MacAdam steps
- Color temperature & quality**
2200K CRI>80
2700K CRI>80
3000K CRI>80/90
3500K CRI>80
4000K CRI>80
- Lifetime (Ta 25°)**
L90 >60.500 hrs

FIXTURE

- Dimensions**
L108mm x D55mm x H108mm
- Material**
Aluminium
- Body finishes**
Black
Anthracite Grey (RAL 7016)
Bright brown (RAL 4061)
Intense Bronze
Gray
White (RAL 9003)
- Weight**
730gr
- Mounting**
Wall Mounting
- Fixing**
Applique
- Working temperature**
-20° / +40°

ELECTRICAL FEATURES

- Power supply**
Main Voltage:
220-240Vac
- Driver requirement**
Built-in
- Control**
On/off
- Feature**
Water Infiltration Protection System

Kumi IP67 single light emission

PHOTOMETRIC DATA (3000K CRI>80)

