


Luna m IP65

Pendant Lighting | IP65 | Class III | Dimmable

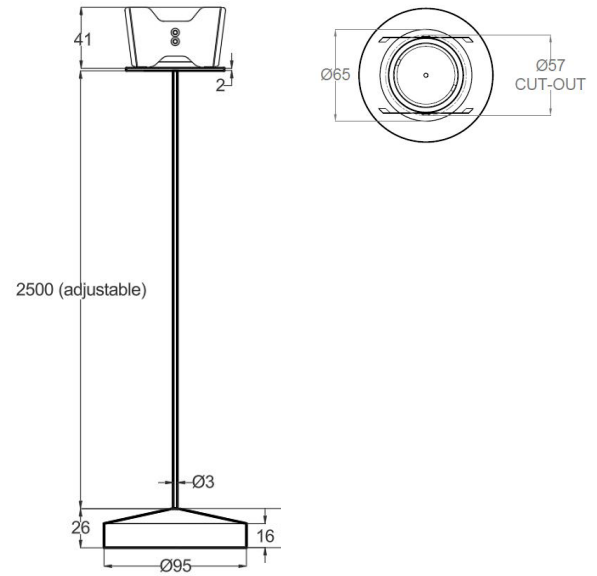

LIGHT SOURCE & OPTIC

Power

6W

Emission

Diffused

Beam Direction

Fixed, Symmetrical

Material

Glass

LED quantity

56

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

Lifetime (Ta 25°)

L70 >54.000 hrs

Output (3000K CRI>90)

584 lm

FIXTURE

Dimensions

Ø 95mm x H. 26mm

Material

Aluminium

Body finishes

Black

Titanium

Dark bronze

Champagne gold

Gray

Ceiling canopy finishes

Black (RAL 9005)

White (RAL 9003)

Weight

370gr

Mounting

Semirecessed: cut out: Ø 57mm

Fixing

Springs

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power Supply

Constant tension: 24 Vdc

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V


Casambi

DALI

Luna m IP65

PHOTOMETRIC DATA (3000K CRI>90)

6W - 105° | UGR 26

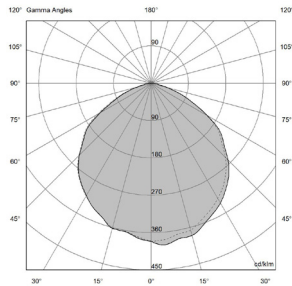

H (m)	D (m)	Eav (lx)
1	2.83	36
2	5.66	9
3	8.49	4
4	11.32	2
5	14.15	1

Total lumen output
363 lm

Efficacy
60 lm/W

Luna m IP65


INSTALLATION ACCESSORIES

Fixing rame (A01756._0)
Necessary element: please specify always 1
frame for each Fixture in the purchase order

SUGGESTED REMOTE DRIVERS

On/off:


CV30-F-24-PI



Ø 44

Dimmable (DALI 2):

CV25-D-24-PI



Ø 60

Other options upon request