

LIGHT SOURCE

LED quantity	1		
Power max	3 W – 6 W – 9 W		
Total lumen output (3000K)	3W: 3° - 166 lm	6W: 10° - 461 lm 30° - 399 lm 50° - 367 lm	9W: 10° - 594 lm 30° - 513 lm 50° - 455 lm
Efficacy lm/W (3000K)	3W: 3° - 55 lm/W	6W: 10° - 77 lm/W 30° - 66 lm/W 50° - 61 lm/W	9W: 10° - 66 lm/W 30° - 57 lm/W 50° - 50 lm/W
CRI	>80 – >90		
LED Temperature	2700K – 3000K – 3000K CRI>90 – 3500K - 4000K		
Average operational life	50.000 hours		

OPTIC

Material	PMMA
Available optics	3° - 10° - 30° - 50°
Beam direction	Adjustable +/-100°, rotating +/- 355°
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum, Stainless Steel
Available finishes	Hard coat anodized: 3 - Gray 4 - Black T - Titanium As per material: 6 - Stainless steel AISI 316L
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Applique, stake, tree strap mounting

ELECTRICAL FEATURES

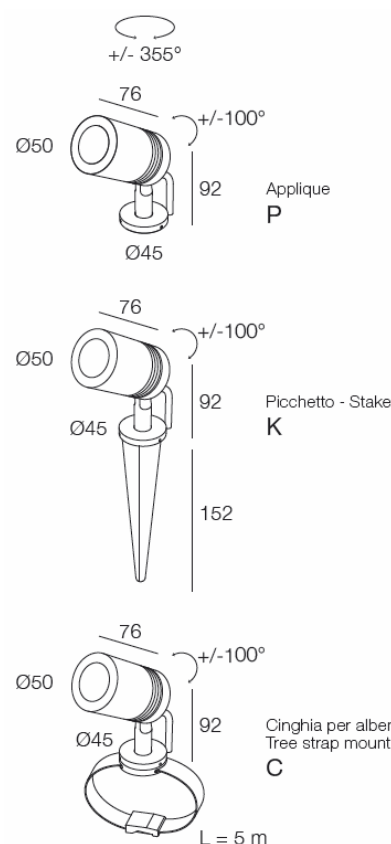
Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In parallel at 24Vdc
Class	III

MECHANICAL FEATURES

Dimensions (body)	Ø50 x 76 mm
Weight	380 gr
Installation	Wall, ceiling, floor mounting
Cut-out	-
Use	Outdoor

ACCESSORIES

Visors	Low glare visor, low glare snoot
Filters	-
Box/ Frame	-
Fixing system	-







A00519._0 Low glare visor



A00848._0 Low glare snoot

PHOTOMETRIC DATA

3° Lens – 3W	10° Lens – 9W	30° Lens – 9W	50° Lens – 9W																																																																																																																
																																																																																																																			
<table><tr><th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr><tr><td>3°</td><td></td><td></td><td></td></tr><tr><td><u>1.00</u></td><td>0.08</td><td>7700</td><td>4569</td></tr><tr><td><u>2.00</u></td><td>0.16</td><td>1925</td><td>1142</td></tr><tr><td><u>3.00</u></td><td>0.24</td><td>856</td><td>508</td></tr><tr><td><u>4.00</u></td><td>0.31</td><td>481</td><td>286</td></tr><tr><td><u>5.00</u></td><td>0.39</td><td>308</td><td>183</td></tr></table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	3°				<u>1.00</u>	0.08	7700	4569	<u>2.00</u>	0.16	1925	1142	<u>3.00</u>	0.24	856	508	<u>4.00</u>	0.31	481	286	<u>5.00</u>	0.39	308	183	<table><tr><th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr><tr><td>10°</td><td></td><td></td><td></td></tr><tr><td><u>1.00</u></td><td>0.21</td><td>8339</td><td>5186</td></tr><tr><td><u>2.00</u></td><td>0.42</td><td>2085</td><td>1296</td></tr><tr><td><u>3.00</u></td><td>0.63</td><td>927</td><td>576</td></tr><tr><td><u>4.00</u></td><td>0.84</td><td>521</td><td>324</td></tr><tr><td><u>5.00</u></td><td>1.05</td><td>334</td><td>207</td></tr></table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	10°				<u>1.00</u>	0.21	8339	5186	<u>2.00</u>	0.42	2085	1296	<u>3.00</u>	0.63	927	576	<u>4.00</u>	0.84	521	324	<u>5.00</u>	1.05	334	207	<table><tr><th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr><tr><td>30°</td><td></td><td></td><td></td></tr><tr><td><u>1.00</u></td><td>0.51</td><td>2006</td><td>1291</td></tr><tr><td><u>2.00</u></td><td>1.02</td><td>501</td><td>323</td></tr><tr><td><u>3.00</u></td><td>1.54</td><td>223</td><td>143</td></tr><tr><td><u>4.00</u></td><td>2.05</td><td>125</td><td>81</td></tr><tr><td><u>5.00</u></td><td>2.56</td><td>80</td><td>52</td></tr></table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	30°				<u>1.00</u>	0.51	2006	1291	<u>2.00</u>	1.02	501	323	<u>3.00</u>	1.54	223	143	<u>4.00</u>	2.05	125	81	<u>5.00</u>	2.56	80	52	<table><tr><th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr><tr><td>50°</td><td></td><td></td><td></td></tr><tr><td><u>1.00</u></td><td>0.72</td><td>1062</td><td>640</td></tr><tr><td><u>2.00</u></td><td>1.43</td><td>266</td><td>160</td></tr><tr><td><u>3.00</u></td><td>2.15</td><td>118</td><td>71</td></tr><tr><td><u>4.00</u></td><td>2.86</td><td>66</td><td>40</td></tr><tr><td><u>5.00</u></td><td>3.58</td><td>42</td><td>26</td></tr></table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	50°				<u>1.00</u>	0.72	1062	640	<u>2.00</u>	1.43	266	160	<u>3.00</u>	2.15	118	71	<u>4.00</u>	2.86	66	40	<u>5.00</u>	3.58	42	26
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
3°																																																																																																																			
<u>1.00</u>	0.08	7700	4569																																																																																																																
<u>2.00</u>	0.16	1925	1142																																																																																																																
<u>3.00</u>	0.24	856	508																																																																																																																
<u>4.00</u>	0.31	481	286																																																																																																																
<u>5.00</u>	0.39	308	183																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
10°																																																																																																																			
<u>1.00</u>	0.21	8339	5186																																																																																																																
<u>2.00</u>	0.42	2085	1296																																																																																																																
<u>3.00</u>	0.63	927	576																																																																																																																
<u>4.00</u>	0.84	521	324																																																																																																																
<u>5.00</u>	1.05	334	207																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
30°																																																																																																																			
<u>1.00</u>	0.51	2006	1291																																																																																																																
<u>2.00</u>	1.02	501	323																																																																																																																
<u>3.00</u>	1.54	223	143																																																																																																																
<u>4.00</u>	2.05	125	81																																																																																																																
<u>5.00</u>	2.56	80	52																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
50°																																																																																																																			
<u>1.00</u>	0.72	1062	640																																																																																																																
<u>2.00</u>	1.43	266	160																																																																																																																
<u>3.00</u>	2.15	118	71																																																																																																																
<u>4.00</u>	2.86	66	40																																																																																																																
<u>5.00</u>	3.58	42	26																																																																																																																

NOTES

Provided with 200 cm neoprene