

Projectors



IP67

WIPS

500
700
900

24V

2 m

380 g

2

SD
CM

UL

LISTED

Macro IP67

	500 / 700 / 900mA Lumen Output 3000K	3W 900mA - 200 lm	6W 500mA - 450 lm	9W 700mA - 600 lm
3° Lens	7T3694.____-UL			
10° Lens			733693.____-UL	733717.____-UL
30° Lens			763693.____-UL	763717.____-UL
50° Lens			7D3693.____-UL	7D3717.____-UL

	24V Lumen Output 3000K	3W 24Vdc - 200 lm	6W 24Vdc - 450 lm	9W 24Vdc - 600 lm
3° Lens	7TA863.____-UL			
10° Lens			73A862.____-UL	73A866.____-UL
30° Lens			76A862.____-UL	76A866.____-UL
50° Lens			7DA862.____-UL	7DA866.____-UL

Macro IP67 with hex louver

	500 / 700 / 900mA Lumen Output 3000K	3W 900mA - 130 lm	6W 500mA - 310 lm	9W 700mA - 390 lm
3° Lens	7T3696.____-UL			
10° Lens			733695.____-UL	733718.____-UL
30° Lens			763695.____-UL	763718.____-UL
50° Lens			7D3695.____-UL	7D3718.____-UL

	24V Lumen Output 3000K	3W 24Vdc - 130 lm	6W 24Vdc - 310 lm	9W 24Vdc - 390 lm
3° Lens	7TA865.____-UL			
10° Lens			73A864.____-UL	73A867.____-UL
30° Lens			76A864.____-UL	76A867.____-UL
50° Lens			7DA864.____-UL	7DA867.____-UL

FINISH

● 4

Black

● T

Titanium

● 3

Gray

CCT

● Y

2700K

● 6

3000K

● W

3000K CRI > 90

● J

3500K

● 9

4000K

FIXING

P


Applique

K

Stake

C

Tree strap mounting

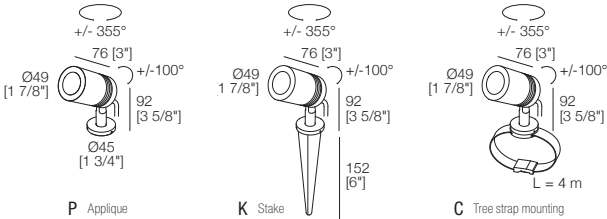

discover more

SUGGESTED DRIVERS (not included)

500mA	CC36-R-500-NF	p. 245
700mA	CC36-R-700-NF	p. 245
900mA	CC36-R-900-NF	p. 246
24Vdc	CV60-R-24-M	p. 248

ACCESSORIES

49
[1 7/8"]

Ø56
[2 1/4"]

9 [3/8"]

Low glare visor
A00519._0

49
[1 7/8"]

Ø56
[2 1/4"]

Low glare snoot
A00848._0

EXAMPLE CODE COMPOSITION

123456.____-UL

FIXING

CCT

FINISH