

# MACRO IP68 3° with hex louver



## LIGHT SOURCE

LED quantity	1
Power max	3 W
Total lumen output (3000K)	131 lm
Efficacy lm/W (3000K)	44 lm/W
LOR (3000K)	61%
CRI	>80
LED Temperature (K)	2700 K – 3000 K – 4000 K – 5000 K
Average operational life	50.000 hours

## OPTIC

Material	PMMA lens
Available optics	3°-10°-30°
Beam direction	Adjustable
Flux symmetry	Symmetrical
Accessories	Low glare visor (A00519.60)

## LED FIXTURE

Material	AISI 316L Stainless steel
Finish	AISI 316L Stainless steel
Available finishes	AISI 316L
IP Rate	IP68
Working Temperature	-20° ÷ +40°
Accessories	-



## ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 900mA
Class	III

## MECHANICAL FEATURES

Dimensions (mm)	Ø50 x 76
Weight	380 gr
Mounting	Wall, Ceiling, Floor mounting
Cut-out (mm)	-
Use	Immersion

## NOTES

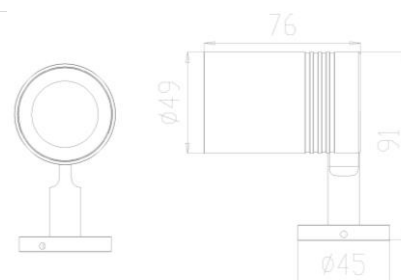

3W

H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
3°			
1.00	0.08	6854	4072
2.00	0.16	1714	1018
3.00	0.23	762	452
4.00	0.31	428	255
5.00	0.39	274	163