

LIGHT SOURCE

LED quantity	1
Power max	3 W
Total lumen output (3000K)	166 lm
Efficacy lm/W (3000K)	55 lm/W
LOR (3000K)	77%
CRI	>80
LED Temperature (K)	2700 K – 3000 K – 4000 K – 5000 K
Average operational life	50.000 hours

OPTIC

Material	PMMA lens
Available optics	3°-10°-30°
Beam direction	Adjustable
Flux symmetry	Symmetrical
Accessories	Low glare visor (A00519.60)

LED FIXTURE

Material	AISI 316L Stainless steel
Finish	AISI 316L Stainless steel
Available finishes	AISI 316L
IP Rate	IP68
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 900mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø50 x 76
Weight	380 gr
Mounting	Wall, Ceiling, Floor mounting
Cut-out (mm)	-
Use	Immersion

NOTES

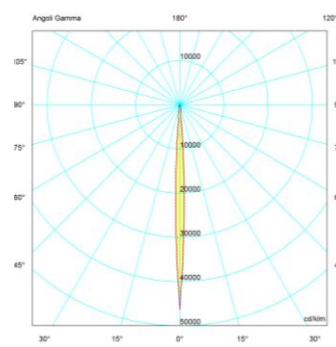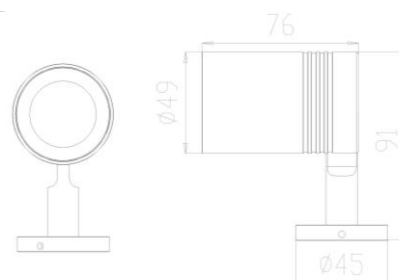

3W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
3°			
1.00	0.08	7700	4569
2.00	0.16	1925	1142
3.00	0.24	856	508
4.00	0.31	481	286
5.00	0.39	308	183