

MACRO IP68 10° with hex louver



LIGHT SOURCE

LED quantity	1
Power max	6 W – 9W
Total lumen output (3000K)	312 lm - 388 lm
Efficacy lm/W (3000K)	52 lm/W - 43 lm/W
LOR (3000K)	56% - 52%
CRI	>80
LED Temperature (K)	2700 K – 3000 K – 4000 K – 5000 K
Average operational life	50.000 hours

OPTIC

Material	PMMA lens
Available optics	3°-10°-30°
Beam direction	Adjustable
Flux symmetry	Symmetrical
Accessories	Low glare visor (A00519.60)

LED FIXTURE

Material	AISI 316L Stainless steel
Finish	AISI 316L Stainless steel
Available finishes	AISI 316L
IP Rate	IP68
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 500mA – 700mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø50 x 76
Weight	380 gr
Mounting	Wall, Ceiling, Floor mounting
Cut-out (mm)	-
Use	Immersion

NOTES

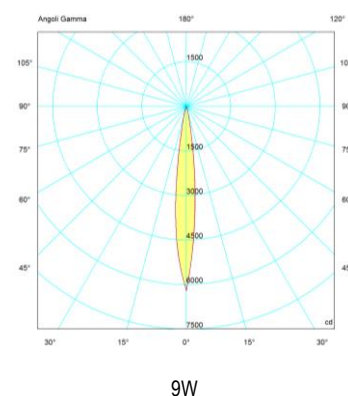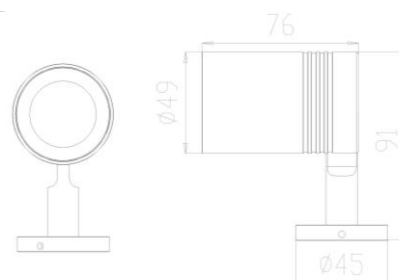

9W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
10°			
1.00	0.21	6191	3842
2.00	0.42	1548	960
3.00	0.64	688	427
4.00	0.85	387	240
5.00	1.06	248	154