


Maestro

Showcase lighting | IP40 | Class III | Dimmable

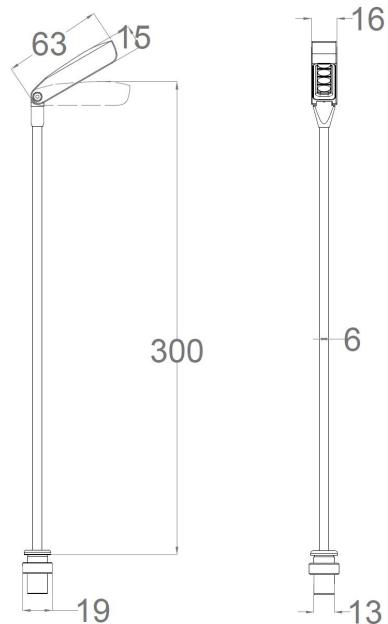

LIGHT SOURCE & OPTIC

Power

4W

Lens

10°/30°/40°/60°

Elliptical / Accent / Soft / Fade

Beam Direction

Adjustable:

Tilting +/- 125°, Rotating +/- 355°

Material

PMMA

LED quantity

4

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80

2700K CRI>80/90

3000K CRI>80/90

4000K CRI>80/90

5000K CRI>80

Lifetime

(L80) >76.600 hrs

FIXTURE

Dimensions

63 x 16 x 15 mm (head)
H 300 mm (pole)

Material

Aluminium

Body finishes

Black
Titanium
Champagne Gold
Gray

Weight

50gr

Mounting

On telescopic pole: cut out Ø 13,5 mm

Fixing

Ring Nut

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
350 mA
Typical Vf= 4x3V

Driver requirement

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI


Maestro

PHOTOMETRIC DATA (3000K CRI>80)


4W - 10° | UGR 12.7




4W - 30° | UGR 19.6



4W - 40° | UGR 23



4W - 60° | UGR 25



H (m)	D (m)	Eav (lx)
1	0.27	3471
2	0.54	868
3	0.80	386
4	1.07	217
5	1.34	139

H (m)	D (m)	Eav (lx)
1	0.42	1381
2	0.85	345
3	1.27	153
4	1.69	86
5	2.12	55

H (m)	D (m)	Eav (lx)
1	0.65	765
2	1.31	191
3	1.96	85
4	2.62	48
5	3.27	31

H (m)	D (m)	Eav (lx)
1	0.99	456
2	1.98	114
3	2.98	51
4	3.97	28
5	4.96	18

Total lumen output
406 lm

Efficacy
106 lm/W

Total lumen output
373 lm

Efficacy
95 lm/W


Total lumen output
381 lm

Efficacy
96 lm/W


Total lumen output
367 lm

Efficacy
92 lm/W


4W - Elliptical | UGR 13.4




4W - Accent | UGR 20.2



4W - Fade | UGR 21.1



4W - Soft | UGR 23.3



H (m)	D (m)	Eav (lx)
1	0.29	1342
2	0.59	335
3	0.88	149
4	1.18	84
5	1.47	54

H (m)	D (m)	Eav (lx)
1	0.30	2029
2	0.60	507
3	0.90	225
4	1.20	127
5	1.50	81

H (m)	D (m)	Eav (lx)
1	0.76	1157
2	1.52	289
3	2.28	129
4	3.05	72
5	3.81	46

H (m)	D (m)	Eav (lx)
1	2.55	43
2	5.10	11
3	7.66	5
4	10.21	3
5	12.76	2

Total lumen output
378 lm

Efficacy
96 lm/W

Total lumen output
392 lm

Efficacy
101 lm/W

Total lumen output
375 lm

Efficacy
95 lm/W


Total lumen output
370 lm

Efficacy
94 lm/W


Maestro

SUGGESTED REMOTE DRIVER

On/off:
CC20-F-350-N



Multifunction (DALI 2, 0/1-10V, PUSH):
CC25-DM-350-N



Other options upon request