


Micro 230V

Projectors | IP67 | Class II | Dimmable

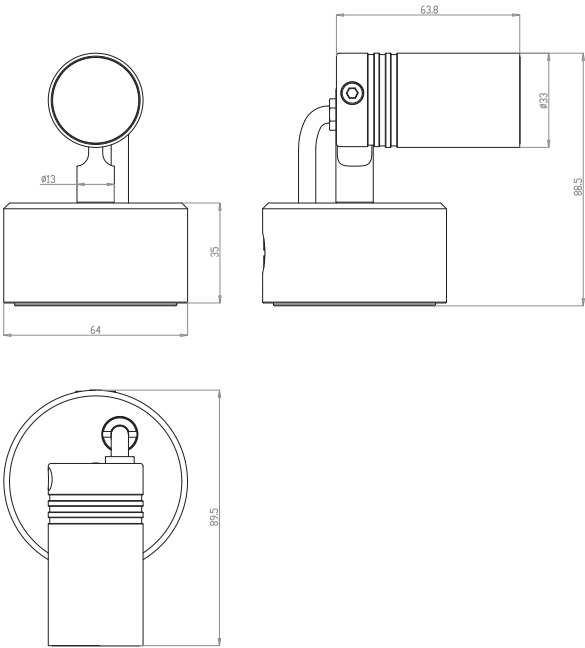

LIGHT SOURCE & OPTIC

Power
4W

Lens
15°
30°
60°
Elliptical
Frosted Glass

Beam Direction
Adjustable:
Tilting +/-100°, rotating +/-355°,
Symmetrical

Material
PMMA + glass

LED quantity
3

Binning
2 MacAdam steps

Color temperature & quality
2200K
2700K
3000K CRI>80/90
4000K

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 49mm x H 76mm (cylinder)

Material
Aluminium

Body finishes
Black
Gray

Weight
460gr

Mounting
On surface

Fixing
Applique
Stake
Tree strap mounting

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Main Voltage:
220-240Vac





Driver requirement
Built-in

Control
On/off

Feature
Water Infiltration Protection System


Micro 230V

PHOTOMETRIC DATA (3000K CRI>90)

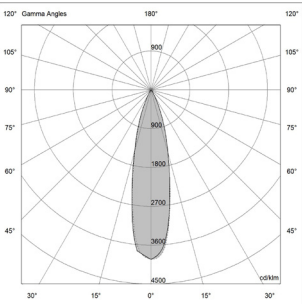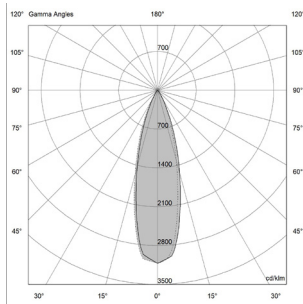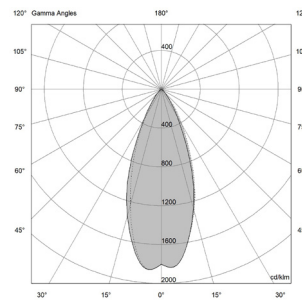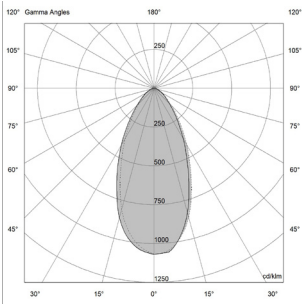4W - 15° UGR 15			4W - 30° UGR 17			4W - 60° UGR 20			4W - Frosted° UGR 24		
											
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.44	663	1	0.51	485	1	0.73	211	1	0.91	104
2	0.88	166	2	1.01	121	2	1.45	53	2	1.82	26
3	1.32	74	3	1.52	54	3	2.18	23	3	2.74	12
4	1.76	41	4	2.02	30	4	2.91	13	4	3.65	7
5	2.20	27	5	2.53	19	5	3.64	8	5	4.56	4

Total lumen output 272 lm	Total lumen output 252 lm	Total lumen output 194 lm	Total lumen output 177 lm
Efficacy 68 lm/W	Efficacy 63 lm/W	Efficacy 48 lm/W	Efficacy 44 lm/W

4W - Elliptical | UGR 18




H (m)	D (m)	Eav (lx)
1	0.46	387
2	0.92	97
3	1.39	43
4	1.85	24
5	2.31	15

Total lumen output 242 lm
Efficacy 60 lm/W


Micro 230V

INTERCHANGEABLE ACCESSORIES

Low glare visor (A00519._0)



Low glare snoot (A00848._0)



INSTALLATION ACCESSORIES

Watertight connector (A00387.40)

