


Micro H350

Bollards | IP67 | Class III | Dimmable

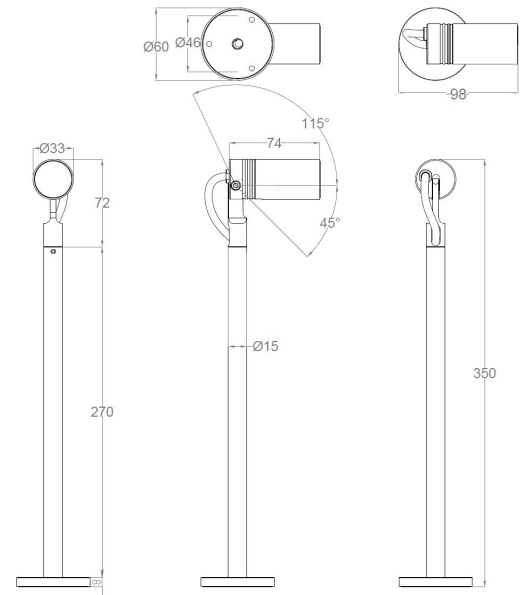

LIGHT SOURCE & OPTIC

Power

3W (350 mA)
4W (24 Vdc)

Lens

15°
30°
60°
Elliptical
Frosted Glass

Beam Direction

Adjustable:
Tilting +/-90°, rotating +/-355°,
Symmetrical

Material

PMMA + glass

LED quantity

3

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

Lifetime (Ta 25°)

L90>60.000 hrs

FIXTURE

Dimensions

Ø 33mm x L 64mm (cylinder)
H 350 mm

Material

Aluminium, Brass

Body finishes

Black
Moka
Anthracite Gray
Olive green
Gray

Weight

350gr

Mounting

On surface

Fixing

Applique
Stake
Tree strap mounting

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
350 mA
Typical Vf= 3x3V
Constant tension:
24Vdc

Driver requirement

Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI


Feature

Water Infiltration Protection System

Micro H350

PHOTOMETRIC DATA (3000K CRI>80)

3/4W - 15° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.44	663
2	0.88	166
3	1.32	74
4	1.76	41
5	2.20	27

Total lumen output
266 lm

Efficacy
88 lm/W (350 mA)
66 lm/W (24 Vdc)

3/4W - 30° | UGR 17




H (m)	D (m)	Eav (lx)
1	0.51	485
2	1.01	121
3	1.52	54
4	2.02	30
5	2.53	19

Total lumen output
248 lm

Efficacy
82 lm/W (350 mA)
62 lm/W (24 Vdc)

3/4W - 60° | UGR 20




H (m)	D (m)	Eav (lx)
1	0.73	211
2	1.45	53
3	2.18	23
4	2.91	13
5	3.64	8

Total lumen output
193 lm

Efficacy
64 lm/W (350 mA)
48 lm/W (24 Vdc)

3/4W - F.G. | UGR 24




H (m)	D (m)	Eav (lx)
1	0.91	104
2	1.82	26
3	2.74	12
4	3.65	7
5	4.56	4

Total lumen output
176 lm

Efficacy
58 lm/W (350 mA)
44 lm/W (24 Vdc)

3/4W - Elliptical | UGR 18



H (m)	D (m)	Eav (lx)
1	0.46	387
2	0.92	97
3	1.39	43
4	1.85	24
5	2.31	15


Total lumen output
239 lm

Efficacy
79 lm/W (350 mA)
60 lm/W (24 Vdc)


Micro H350

INTERCHANGEABLE ACCESSORIES


Low glare visor (A00846._0)




Low glare snoot (A00847._0)



Anchor for concrete (A00942.60)




Stainless Steel stake (A00851.60)



INSTALLATION ACCESSORIES


Watertight connector (A00387.40)




SUGGESTED REMOTE DRIVERS

On/Off :

CC14-F-350-PI




CV30-F-24-PI




**Multifunction (DALI 2, 0/1-10V, PUSH
RIPPLE FREE, AM DIMMING):**

CC20-D-350-P



CV25-D-24-PI



Other options upon request