


Micro IP68 with hex louver

Projectors | IP68 | Class III | Dimmable

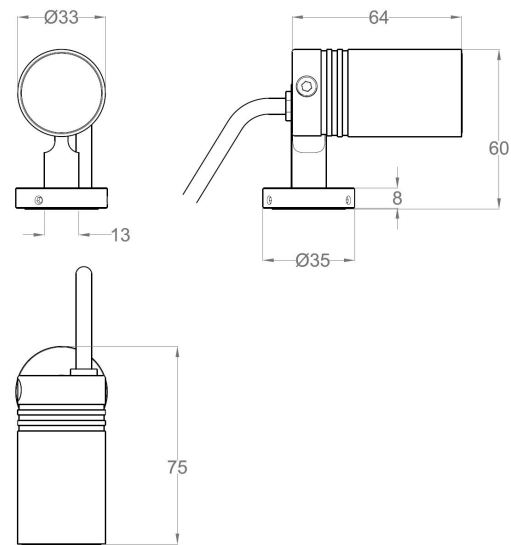

LIGHT SOURCE & OPTIC

Power
3W (350 mA)
4W (12 Vdc)

Lens
15°
30°
60°
Elliptical
Frosted Glass

Beam Direction
Adjustable:
Tilting +/-90°, rotating +/-355°,
Symmetrical

Material
PMMA + glass

LED quantity
3

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>80
3000K CRI>80/90
4000K CRI>80
5000K CRI>80

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 33mm x H 64mm (cylinder)

Material
Stainless Steel

Body finishes
Stainless Steel AISI 316L

Weight
370gr

Mounting
On surface

Fixing
Applique

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
350 mA
Typical Vf= 3x3V
Constant tension:
12Vdc





Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Feature
Water Infiltration Protection System

Micro IP68 with hex louver

PHOTOMETRIC DATA (3000K CRI>80)


3/4W - 15° UGR 15			3/4W - 30° UGR 17			3/4W - 60° UGR 20			3/4W - F.G. UGR 24		
											
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.39	623	1	0.42	441	1	0.59	194	1	0.74	83
2	0.78	156	2	0.84	110	2	1.18	48	2	1.49	21
3	1.16	69	3	1.26	49	3	1.77	22	3	2.23	9
4	1.55	39	4	1.68	28	4	2.35	12	4	2.97	5
5	1.94	25	5	2.10	18	5	2.94	8	5	3.72	3
Total lumen output 192 lm			Total lumen output 158 lm			Total lumen output 120 lm			Total lumen output 97 lm		
Efficacy 64 lm/W (350 mA) 48 lm/W (12 Vdc)			Efficacy 53 lm/W (350 mA) 39 lm/W (12 Vdc)			Efficacy 40 lm/W (350 mA) 30 lm/W (12 Vdc)			Efficacy 32 lm/W (350 mA) 24 lm/W (12 Vdc)		

3/4W - Elliptical UGR 18		
		
H (m)	D (m)	Eav (lx)
1	0.40	358
2	0.79	90
3	1.19	40
4	1.58	22
5	1.98	14
Total lumen output 153 lm		
Efficacy 51 lm/W (350 mA) 38 lm/W (12 Vdc)		


Micro IP68 with hex louver

INTERCHANGEABLE ACCESSORIES


Low glare visor (A00846.60)



Low glare snoot (A00847.60)




Stainless Steel stake (A00277.60)




INSTALLATION ACCESSORIES

Watertight connector (A00387.40)




SUGGESTED REMOTE DRIVERS


On/Off :
CC14-F-350-PI




CV30-F-24-PI



**Multifunction (DALI 2, 0/1-10V, PUSH
RIPPLE FREE, AM DIMMING):**
CC20-D-350-P



CV25-D-24-PI



Other options upon request