




Projectors





Micro


 <b>350mA</b> Lumen Output 3000K	<b>3W</b> 350mA - 270 lm
<b>15°</b> Lens	<b>7A0833.</b> _ _ _
<b>30°</b> Lens	<b>760833.</b> _ _ _
<b>60°</b> Lens	<b>750833.</b> _ _ _
Frosted Glass	<b>710832.</b> _ _ _
Elliptical Lens	<b>770833.</b> _ _ _







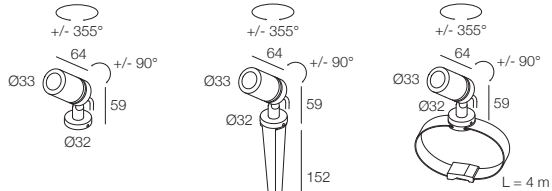

 <b>24V</b> Lumen Output 3000K	<b>4W</b> 24Vdc - 270 lm
<b>15°</b> Lens	<b>7A4716.</b> _ _ _
<b>30°</b> Lens	<b>764716.</b> _ _ _
<b>60°</b> Lens	<b>754716.</b> _ _ _
Frosted Glass	<b>714716.</b> _ _ _
Elliptical Lens	<b>774716.</b> _ _ _

Micro with hex louver

 <b>350mA</b> Lumen Output 3000K	<b>3W</b> 350mA - 190 lm
<b>15°</b> Lens	<b>7A4151.</b> _ _ _
<b>30°</b> Lens	<b>764151.</b> _ _ _
<b>60°</b> Lens	<b>754151.</b> _ _ _
Frosted Glass	<b>714151.</b> _ _ _
Elliptical Lens	<b>774151.</b> _ _ _

 <b>24V</b> Lumen Output 3000K	<b>4W</b> 24Vdc - 190 lm
<b>15°</b> Lens	<b>7A4717.</b> _ _ _
<b>30°</b> Lens	<b>764717.</b> _ _ _
<b>60°</b> Lens	<b>754717.</b> _ _ _
Frosted Glass	<b>714717.</b> _ _ _
Elliptical Lens	<b>774717.</b> _ _ _



FINISH	CCT	FIXING
 <b>4</b> Black	 <b>U</b> 2200K	<b>P</b> Applique
 <b>E</b> Massive Brass	 <b>Y</b> 2700K	<b>K</b> Stake
 <b>3</b> Gray	 <b>6</b> 3000K	<b>C</b> Tree strap mounting
	 <b>W</b> 3000K CRI > 90	
	 <b>9</b> 4000K	



SUGGESTED DRIVERS (not included)

350mA	<b>CC14-F-350-PI</b>	p. 704
24Vdc	<b>CV30-F-24-PI</b>	p. 708

ACCESSORIES

 <b>9</b>	 <b>35</b>	 <b>37</b>   22 / 36,5
Low glare visor <b>A00846._0</b>	Low glare snoot <b>A00847._0</b>	Watertight connector p. 682 <b>A00387.40</b>

EXAMPLE CODE COMPOSITION

123456.	FIXING
	CCT
	FINISH