


# Micro with hex louver

Projectors | IP67 | Class III | Dimmable

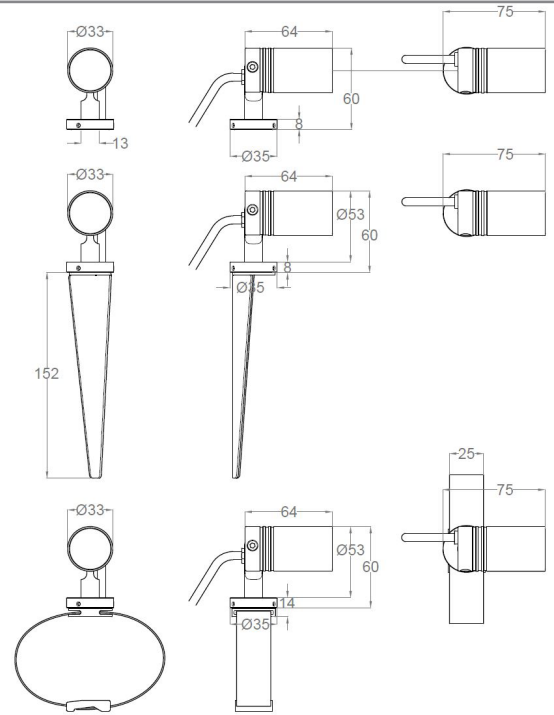

## LIGHT SOURCE & OPTIC

### Power

3W (350 mA)  
4W (24 Vdc)

### Lens

15°  
30°  
60°  
Elliptical  
Frosted Glass

### Beam Direction

Adjustable:  
Tilting +/-90°, rotating +/-355°,  
Symmetrical

### Material

PMMA + glass

### LED quantity

3

### Binning

2 MacAdam steps

### Color temperature & quality

2200K CRI>80  
2700K CRI>80  
3000K CRI>80/90  
4000K CRI>80

### Lifetime (Ta 25°)

L90 >60.000 hrs

## FIXTURE

### Dimensions

Ø 33mm x H 64mm (cylinder)

### Material

Aluminium, Brass

### Body finishes

Black  
Massive brass  
Gray

### Weight

160gr

### Mounting

On surface

### Fixing

Applique  
Stake  
Tree strap mounting

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant current:  
350 mA  
Typical Vf= 3x3V  
Constant tension:  
24Vdc

### Driver requirement

Remote (not included)

### Control

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI


### Feature

Water Infiltration Protection System

# Micro with hex louver

## PHOTOMETRIC DATA (3000K CRI>80)

### 3/4W - 15° | UGR 15




H (m)	D (m)	Eav (lx)
1	0.39	623
2	0.78	156
3	1.16	69
4	1.55	39
5	1.94	25

**Total lumen output**  
192 lm

**Efficacy**  
64 lm/W (350 mA)  
48 lm/W (24 Vdc)

### 3/4W - 30° | UGR 17




H (m)	D (m)	Eav (lx)
1	0.42	441
2	0.84	110
3	1.26	49
4	1.68	28
5	2.10	18

**Total lumen output**  
158 lm

**Efficacy**  
53 lm/W (350 mA)  
39 lm/W (24 Vdc)

### 3/4W - 60° | UGR 20




H (m)	D (m)	Eav (lx)
1	0.59	194
2	1.18	48
3	1.77	22
4	2.35	12
5	2.94	8

**Total lumen output**  
120 lm

**Efficacy**  
40 lm/W (350 mA)  
30 lm/W (24 Vdc)

### 3/4W - F.G. | UGR 24




H (m)	D (m)	Eav (lx)
1	0.74	83
2	1.49	21
3	2.23	9
4	2.97	5
5	3.72	3

**Total lumen output**  
97 lm

**Efficacy**  
32 lm/W (350 mA)  
24 lm/W (24 Vdc)

### 3/4W - Elliptical | UGR 18



H (m)	D (m)	Eav (lx)
1	0.40	358
2	0.79	90
3	1.19	40
4	1.58	22
5	1.98	14


**Total lumen output**  
153 lm

**Efficacy**  
51 lm/W (350 mA)  
38 lm/W (24 Vdc)


# Micro with hex louver

## INTERCHANGEABLE ACCESSORIES

Low glare visor (A00846.\_0)




Low glare snoot (A00847.\_0)



## INSTALLATION ACCESSORIES


Watertight connector (A00387.40)




## SUGGESTED REMOTE DRIVERS

**On/Off :**

CC14-F-350-PI




CV30-F-24-PI




**Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):**

CC20-D-350-P



CV25-D-24-PI



Other options upon request