

LIGHT SOURCE

LED quantity	1
Power max	2,5 W
Total lumen output (3000K CRI>90)	10° - 114 lm 25° - 113 lm 40° - 113 lm 60° - 80 lm
Efficacy lm/W (3000K CRI>90)	10° - 46 lm/W 25° - 45 lm/W 40° - 45 lm/W 60° - 32 lm/W
CRI	>80 - >90
LED Temperature	2200K - 2700K CRI>90 - 3000K CRI>90 - 3500K - 4000K CRI>90
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	10° - 25° - 40° - 60°
Beam direction	Adjustable +/- 90°, rotating +/- 355°
Flux symmetry	Symmetrical

FIXTURE

Material	Aluminum, Brass, Stainless steel
Available finishes	Hard coat anodized: 3 - Gray 4 - Black As per material: E - Massive Brass 6 - Stainless steel AISI 316L Powder coating: VC - Fir green MS - Bright brown
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	Applique (P), Stake (K), Stake H350(A), Tree strap mounting(C), Bollard H350 (B)

ELECTRICAL FEATURES







Driver	Remote
Dimmable	Push, 1-10V, DALI
Connection	In series at 700mA
Class	III

MECHANICAL FEATURES





Dimensions	Ø20 x 49 mm (cylinder only)
Weight	40 gr
Installation	Wall, ceiling, floor mounting
Cut-out	-
Use	Outdoor

ACCESSORIES

Visors	Low glare visor, low glare tube visor
Filters	Hex louver version available
Box/ Frame	-

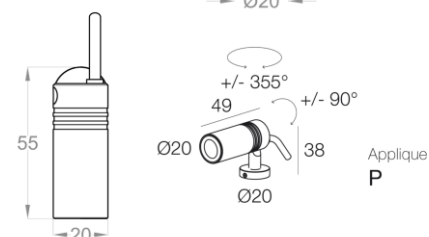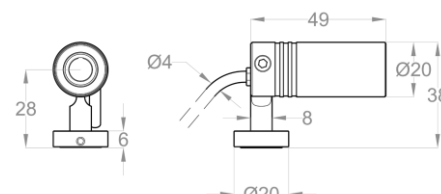

PHOTOMETRIC DATA

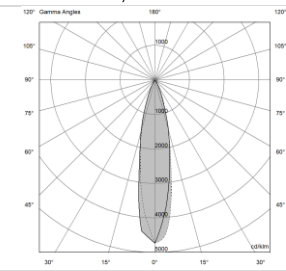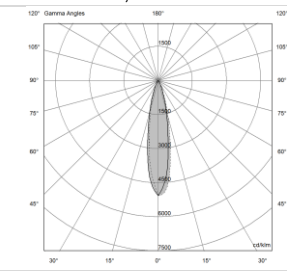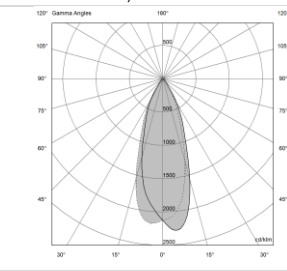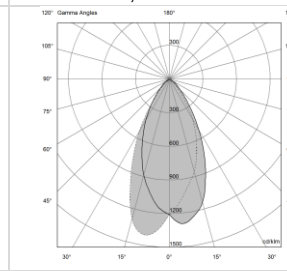10° Lens – 2,5W	25° Lens – 2,5W	40° Lens – 2,5W	60° Lens – 2,5W																																																																																																																
																																																																																																																			
<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>10°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.38</td><td>527</td><td>334</td></tr> <tr> <td><u>2.00</u></td><td>0.76</td><td>132</td><td>83</td></tr> <tr> <td><u>3.00</u></td><td>1.13</td><td>59</td><td>37</td></tr> <tr> <td><u>4.00</u></td><td>1.51</td><td>33</td><td>21</td></tr> <tr> <td><u>5.00</u></td><td>1.89</td><td>21</td><td>13</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	10°				<u>1.00</u>	0.38	527	334	<u>2.00</u>	0.76	132	83	<u>3.00</u>	1.13	59	37	<u>4.00</u>	1.51	33	21	<u>5.00</u>	1.89	21	13	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>25°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.36</td><td>561</td><td>354</td></tr> <tr> <td><u>2.00</u></td><td>0.72</td><td>140</td><td>88</td></tr> <tr> <td><u>3.00</u></td><td>1.07</td><td>62</td><td>39</td></tr> <tr> <td><u>4.00</u></td><td>1.43</td><td>35</td><td>22</td></tr> <tr> <td><u>5.00</u></td><td>1.79</td><td>22</td><td>14</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	25°				<u>1.00</u>	0.36	561	354	<u>2.00</u>	0.72	140	88	<u>3.00</u>	1.07	62	39	<u>4.00</u>	1.43	35	22	<u>5.00</u>	1.79	22	14	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>40°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.63</td><td>255</td><td>154</td></tr> <tr> <td><u>2.00</u></td><td>1.27</td><td>64</td><td>39</td></tr> <tr> <td><u>3.00</u></td><td>1.90</td><td>28</td><td>17</td></tr> <tr> <td><u>4.00</u></td><td>2.53</td><td>16</td><td>10</td></tr> <tr> <td><u>5.00</u></td><td>3.17</td><td>10</td><td>6</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	40°				<u>1.00</u>	0.63	255	154	<u>2.00</u>	1.27	64	39	<u>3.00</u>	1.90	28	17	<u>4.00</u>	2.53	16	10	<u>5.00</u>	3.17	10	6	<table> <tr> <th>H(m)</th><th>D(m)</th><th>E_{max}(lx)</th><th>E_{av}(lx)</th></tr> <tr> <td>60°</td><td></td><td></td><td></td></tr> <tr> <td><u>1.00</u></td><td>0.93</td><td>110</td><td>58</td></tr> <tr> <td><u>2.00</u></td><td>1.85</td><td>28</td><td>15</td></tr> <tr> <td><u>3.00</u></td><td>2.78</td><td>12</td><td>6</td></tr> <tr> <td><u>4.00</u></td><td>3.71</td><td>7</td><td>4</td></tr> <tr> <td><u>5.00</u></td><td>4.64</td><td>4</td><td>2</td></tr> </table>	H(m)	D(m)	E _{max} (lx)	E _{av} (lx)	60°				<u>1.00</u>	0.93	110	58	<u>2.00</u>	1.85	28	15	<u>3.00</u>	2.78	12	6	<u>4.00</u>	3.71	7	4	<u>5.00</u>	4.64	4	2
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
10°																																																																																																																			
<u>1.00</u>	0.38	527	334																																																																																																																
<u>2.00</u>	0.76	132	83																																																																																																																
<u>3.00</u>	1.13	59	37																																																																																																																
<u>4.00</u>	1.51	33	21																																																																																																																
<u>5.00</u>	1.89	21	13																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
25°																																																																																																																			
<u>1.00</u>	0.36	561	354																																																																																																																
<u>2.00</u>	0.72	140	88																																																																																																																
<u>3.00</u>	1.07	62	39																																																																																																																
<u>4.00</u>	1.43	35	22																																																																																																																
<u>5.00</u>	1.79	22	14																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
40°																																																																																																																			
<u>1.00</u>	0.63	255	154																																																																																																																
<u>2.00</u>	1.27	64	39																																																																																																																
<u>3.00</u>	1.90	28	17																																																																																																																
<u>4.00</u>	2.53	16	10																																																																																																																
<u>5.00</u>	3.17	10	6																																																																																																																
H(m)	D(m)	E _{max} (lx)	E _{av} (lx)																																																																																																																
60°																																																																																																																			
<u>1.00</u>	0.93	110	58																																																																																																																
<u>2.00</u>	1.85	28	15																																																																																																																
<u>3.00</u>	2.78	12	6																																																																																																																
<u>4.00</u>	3.71	7	4																																																																																																																
<u>5.00</u>	4.64	4	2																																																																																																																
UGR=13	UGR=15	UGR=19	UGR=23																																																																																																																

NOTES

Provided with 200 cm neoprene cable.