
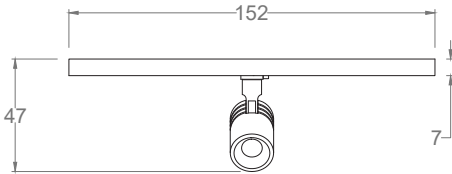



# Mini Tini B Micro

Low voltage track projectors | IP40 | Class III | Dimmable



with surface track



## LIGHT SOURCE & OPTIC

### Power

2W  
3W

### Lens

10°/25°/40°/60°

### Beam Direction

Adjustable:  
Tilting +/-90°, rotating +/-355°  
Symmetrical

### Material

PMMA

### LED quantity

1

### Binning

2 MacAdam steps

### Color temperature & quality

2200K CRI>80  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90  
5000K CRI>80

### Lifetime

(L90) >60.000 hrs

## FIXTURE

### Dimensions

Ø 18mm x H 30mm (cylinder)

### Material

Aluminium

### Body finishes

Black (RAL 9005)  
Dark Bronze  
White (RAL 9003)

### Weight

32gr

### Mounting

On track

### Fixing

Track Connector

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant tension:  
24-48Vdc  
Typical Vf= 3V

### Driver requirement

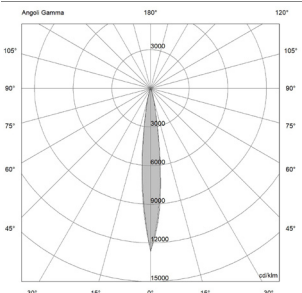
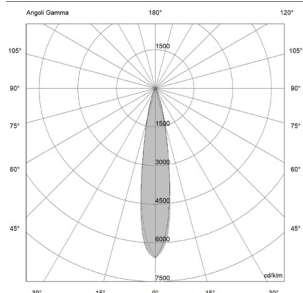
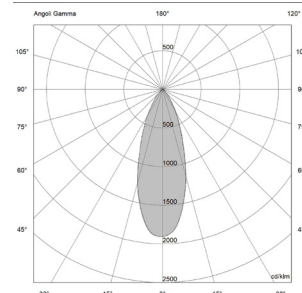
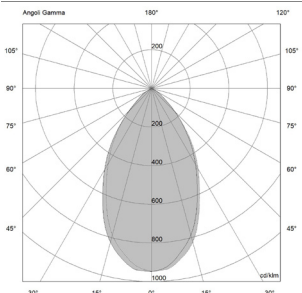
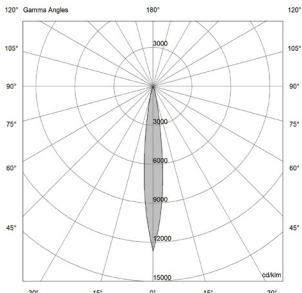
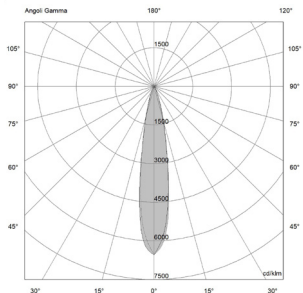
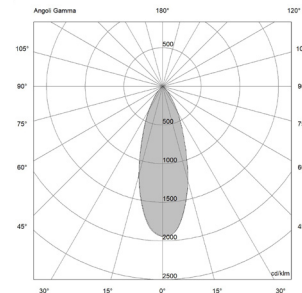
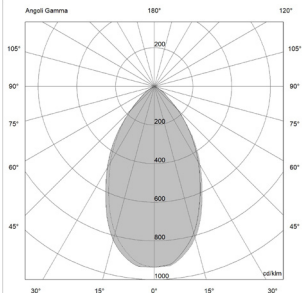
Remote (not included)

### Control

On/off  
DALI  
Broadcast

# Mini Tini B Micro

## PHOTOMETRIC DATA (3000K CRI>90)

<div>2W - 10°   UGR 10</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.23</td><td>942</td></tr><tr><td>2</td><td>0.45</td><td>236</td></tr><tr><td>3</td><td>0.68</td><td>105</td></tr><tr><td>4</td><td>0.90</td><td>59</td></tr><tr><td>5</td><td>1.13</td><td>38</td></tr></table> <div>Total lumen output 74 lm</div> <div>Efficacy 37 lm/W</div>	H (m)	D (m)	Eav (lx)	1	0.23	942	2	0.45	236	3	0.68	105	4	0.90	59	5	1.13	38	<div>2W - 25°   UGR 13</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.33</td><td>526</td></tr><tr><td>2</td><td>0.65</td><td>131</td></tr><tr><td>3</td><td>0.98</td><td>58</td></tr><tr><td>4</td><td>1.31</td><td>33</td></tr><tr><td>5</td><td>1.63</td><td>21</td></tr></table> <div>Total lumen output 80 lm</div> <div>Efficacy 40 lm/W</div>	H (m)	D (m)	Eav (lx)	1	0.33	526	2	0.65	131	3	0.98	58	4	1.31	33	5	1.63	21	<div>2W - 40°   UGR 26</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.66</td><td>125</td></tr><tr><td>2</td><td>1.33</td><td>31</td></tr><tr><td>3</td><td>1.99</td><td>14</td></tr><tr><td>4</td><td>2.65</td><td>8</td></tr><tr><td>5</td><td>3.31</td><td>5</td></tr></table> <div>Total lumen output 66 lm</div> <div>Efficacy 33 lm/W</div>	H (m)	D (m)	Eav (lx)	1	0.66	125	2	1.33	31	3	1.99	14	4	2.65	8	5	3.31	5	<div>2W - 60°   UGR 29</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>1.13</td><td>59</td></tr><tr><td>2</td><td>2.27</td><td>15</td></tr><tr><td>3</td><td>3.40</td><td>7</td></tr><tr><td>4</td><td>4.53</td><td>4</td></tr><tr><td>5</td><td>5.67</td><td>2</td></tr></table> <div>Total lumen output 63 lm</div> <div>Efficacy 31 lm/W</div>	H (m)	D (m)	Eav (lx)	1	1.13	59	2	2.27	15	3	3.40	7	4	4.53	4	5	5.67	2
H (m)	D (m)	Eav (lx)																																																																									
1	0.23	942																																																																									
2	0.45	236																																																																									
3	0.68	105																																																																									
4	0.90	59																																																																									
5	1.13	38																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.33	526																																																																									
2	0.65	131																																																																									
3	0.98	58																																																																									
4	1.31	33																																																																									
5	1.63	21																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.66	125																																																																									
2	1.33	31																																																																									
3	1.99	14																																																																									
4	2.65	8																																																																									
5	3.31	5																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	1.13	59																																																																									
2	2.27	15																																																																									
3	3.40	7																																																																									
4	4.53	4																																																																									
5	5.67	2																																																																									
<div>3W - 10°   UGR 11</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.23</td><td>1267</td></tr><tr><td>2</td><td>0.45</td><td>317</td></tr><tr><td>3</td><td>0.68</td><td>141</td></tr><tr><td>4</td><td>0.90</td><td>79</td></tr><tr><td>5</td><td>1.13</td><td>51</td></tr></table> <div>Total lumen output 100 lm</div> <div>Efficacy 33 lm/W</div>	H (m)	D (m)	Eav (lx)	1	0.23	1267	2	0.45	317	3	0.68	141	4	0.90	79	5	1.13	51	<div>3W - 25°   UGR 14</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.33</td><td>699</td></tr><tr><td>2</td><td>0.65</td><td>175</td></tr><tr><td>3</td><td>0.98</td><td>78</td></tr><tr><td>4</td><td>1.31</td><td>44</td></tr><tr><td>5</td><td>1.64</td><td>28</td></tr></table> <div>Total lumen output 107 lm</div> <div>Efficacy 36 lm/W</div>	H (m)	D (m)	Eav (lx)	1	0.33	699	2	0.65	175	3	0.98	78	4	1.31	44	5	1.64	28	<div>3W - 40°   UGR 26</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>0.66</td><td>170</td></tr><tr><td>2</td><td>1.32</td><td>43</td></tr><tr><td>3</td><td>1.98</td><td>19</td></tr><tr><td>4</td><td>2.64</td><td>11</td></tr><tr><td>5</td><td>3.30</td><td>7</td></tr></table> <div>Total lumen output 88 lm</div> <div>Efficacy 29 lm/W</div>	H (m)	D (m)	Eav (lx)	1	0.66	170	2	1.32	43	3	1.98	19	4	2.64	11	5	3.30	7	<div>3W - 60°   UGR 31</div> <div></div> <table><tr><th>H (m)</th><th>D (m)</th><th>Eav (lx)</th></tr><tr><td>1</td><td>1.14</td><td>79</td></tr><tr><td>2</td><td>2.27</td><td>20</td></tr><tr><td>3</td><td>3.43</td><td>9</td></tr><tr><td>4</td><td>4.57</td><td>5</td></tr><tr><td>5</td><td>5.72</td><td>3</td></tr></table> <div>Total lumen output 84 lm</div> <div>Efficacy 28 lm/W</div>	H (m)	D (m)	Eav (lx)	1	1.14	79	2	2.27	20	3	3.43	9	4	4.57	5	5	5.72	3
H (m)	D (m)	Eav (lx)																																																																									
1	0.23	1267																																																																									
2	0.45	317																																																																									
3	0.68	141																																																																									
4	0.90	79																																																																									
5	1.13	51																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.33	699																																																																									
2	0.65	175																																																																									
3	0.98	78																																																																									
4	1.31	44																																																																									
5	1.64	28																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	0.66	170																																																																									
2	1.32	43																																																																									
3	1.98	19																																																																									
4	2.64	11																																																																									
5	3.30	7																																																																									
H (m)	D (m)	Eav (lx)																																																																									
1	1.14	79																																																																									
2	2.27	20																																																																									
3	3.43	9																																																																									
4	4.57	5																																																																									
5	5.72	3																																																																									

# Mini Tini B Micro

## INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Micro Track:

Standard track (A00918.\_0)  
1m



Trimless track (A01064.\_0)  
1m




Suspended track (A01664.\_0)  
1m




## SUGGESTED REMOTE DRIVER

**On/Off :**  
CC70-F-24-N  
CV70-F-48-N



For On/Off and DALI version.  
Please consider 1 address for each DALI projector.

**Multifunction (DALI 2, 0/1-10V, PUSH):**  
CV75-DM-24-NI  
CV75-DM-48-NI



For Broadcast version.  
Please consider 1 address for each driver in case of DALI control.

Other options upon request