






Projectors

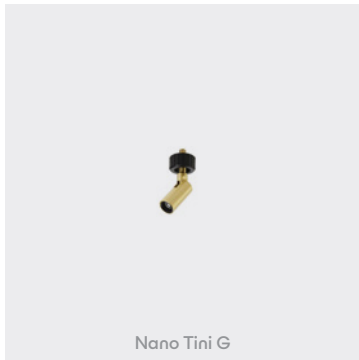


G Ring Nut



M Magnetic



P Applique



S Screw base

[1] To be mounted on metal surfaces only

350 / 500mA	1W	2W [1]
Lumen Output 3000K CRI > 90	350mA - 50 lm	500mA - 80 lm
20° Lens	784015.____-UL	784016.____-UL
30° Lens	764015.____-UL	764016.____-UL
50° Lens	7D4015.____-UL	7D4016.____-UL

FINISH	CCT	FIXING
● 4 Black	● U 2200K	G Ring Nut
● E Massive Brass	● X 2700K CRI > 90	M Magnetic
● I Gold Chrome	● W 3000K CRI > 90	P Applique
● 3 Gray	● K 3500K CRI > 90	S Screw base
● 1 Shiny Chrome	● D 4000K CRI > 90	
○ 7 White		



SUGGESTED DRIVERS (not included)

350mA	CC36-R-350-NF	p. 244
500mA	CC36-R-500-NF	p. 245

ACCESSORIES

 Ø12 [1/2"] Low glare visor A01419_0	 Ø12 [1/2"] Low glare shoot A01420_0
---	---

EXAMPLE CODE COMPOSITION

