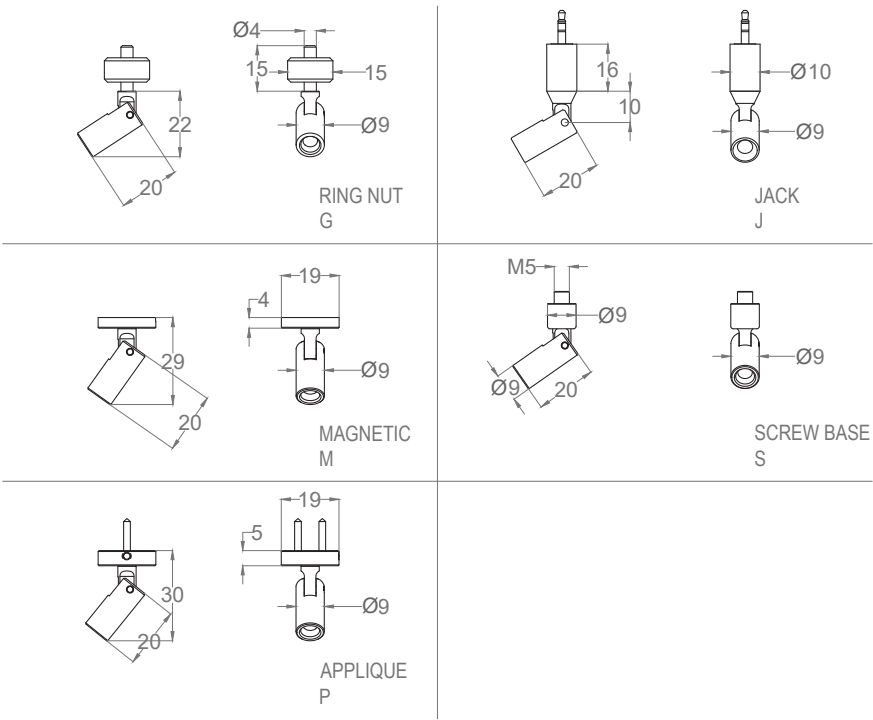


Nano Tini

Projectors | IP40 | Class III | Dimmable



LIGHT SOURCE & OPTIC

Power

1W
2W

Lens

20°/30°/50°

Beam Direction

Adjustable: +15°/-25°
Symmetrical

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>90
3000K CRI>90
3500K CRI>90
4000K CRI>90

Lifetime

(L85) >55.000 hrs

FIXTURE

Dimensions

Ø 9mm x H 20mm (cylinder)

Material

Aluminium

Body finishes

Black
Massive Brass
Gold Chrome
Gray
Shiny Chrome
White (RAL 9003)

Weight

10gr

Mounting

Surface

Fixing

Ring Nut
Magnetic
Applique
Screw Base
Jack

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
350 mA
500 mA
Typical Vf= 3V

Driver requirement







Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Nano Tini


PHOTOMETRIC DATA (3000K CRI>90)

1W - 20° UGR 25			1W - 30° UGR 24			1W - 50° UGR 25		
								
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.45	169	1	0.51	121	1	0.84	64
2	0.90	42	2	1.01	30	2	1.68	16
3	1.34	19	3	1.52	13	3	2.52	7
4	1.79	11	4	2.03	8	4	3.36	4
5	2.24	7	5	2.54	5	5	4.20	3
Total lumen output 51 lm			Total lumen output 46 lm			Total lumen output 41 lm		
Efficacy 51 lm/W			Efficacy 46 lm/W			Efficacy 41 lm/W		
2W - 20° UGR 24,7			2W - 30° UGR 24,4			2W - 50° UGR 25,6		
								
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.44	217	1	0.51	158	1	0.84	84
2	0.89	54	2	1.01	39	2	1.68	21
3	1.33	24	3	1.52	18	3	2.52	9
4	1.78	14	4	2.02	10	4	3.36	5
5	2.22	9	5	2.53	6	5	4.21	3
Total lumen output 67 lm			Total lumen output 59 lm			Total lumen output 54 lm		
Efficacy 33 lm/W			Efficacy 29 lm/W			Efficacy 27 lm/W		


Nano Tini

INTERCHANGEABLE ACCESSORIES

Low glare visor (A01419._0)



Low glare visor (A01420._0)



INSTALLATION ACCESSORIES

Jack input base (A01370._0)




Blanking plug (A01437._0)




SUGGESTED REMOTE DRIVER

On/off:
CC20-F-350-N / CC20-F-500-N



Ø 55

Multifunction (DALI 2, 0/1-10V, PUSH):
CC25-DM-350-N / CC25-DM-500-N



Ø 55

Other options upon request