


Nano Tini

Projectors

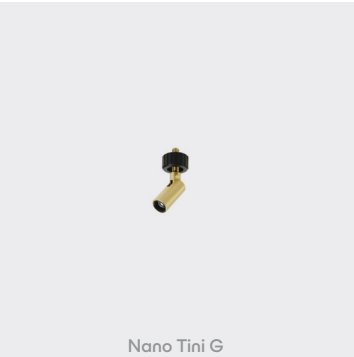

[1] To be mounted on metal surfaces only

IP40

350
500

10 g

2

| 350 / 500mA | 1W | 2W [1] |
|-----------------------------|---------------|---------------|
| Lumen Output 3000K CRI > 90 | 350mA - 50 lm | 500mA - 80 lm |
| 20° Lens | 784015.____ | 784016.____ |
| 30° Lens | 764015.____ | 764016.____ |
| 50° Lens | 7D4015.____ | 7D4016.____ |

G Ring Nut

M Magnetic

P Applique

S Screw base

J Jack

| FINISH | CCT | FIXING |
|-------------------|--------------------|--------------|
| ● 4 Black | ● U 2200K | G Ring Nut |
| ● E Massive Brass | ● X 2700K CRI > 90 | M Magnetic |
| ● I Gold Chrome | ● W 3000K CRI > 90 | P Applique |
| ● 3 Gray | ● K 3500K CRI > 90 | S Screw base |
| ● 1 Shiny Chrome | ● D 4000K CRI > 90 | J Jack |
| ○ 7 White | | |



SUGGESTED DRIVERS (not included)

| | | |
|-------|--------------|--------|
| 350mA | CC20-F-350-N | p. 698 |
| 500mA | CC20-F-500-N | p. 700 |

ACCESSORIES

Low glare visor
A01419_0

Low glare snoot
A01420_0

Jack input base
A01370_0

Blanking plug
A01437_0

EXAMPLE CODE COMPOSITION

123456.

FIXING

CCT

FINISH