




discover more



COVER

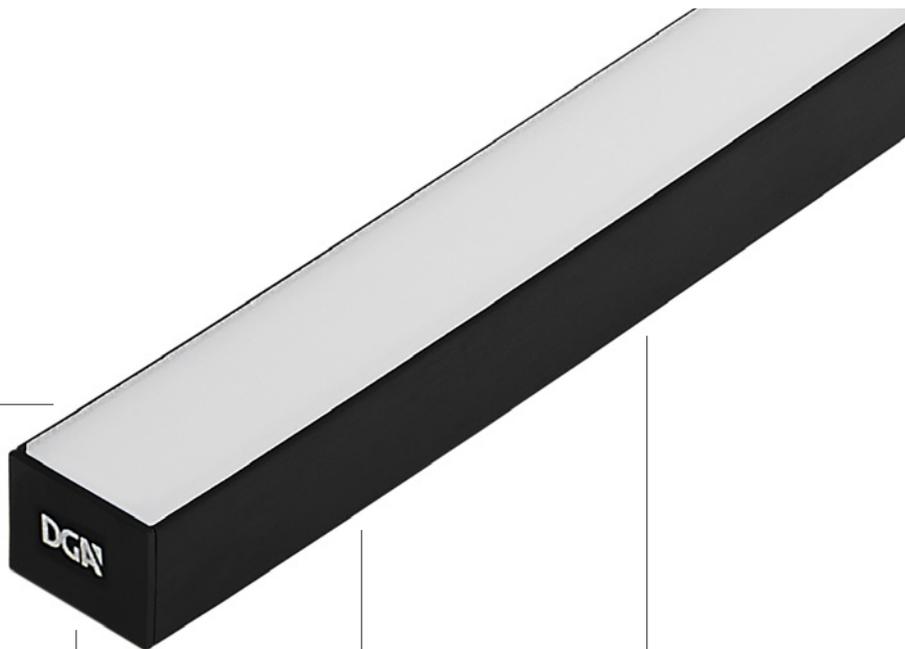

**LOP**  
Light Opal Cover  
20%




**MLK**  
Milky Cover  
32%




**BLK**  
Black Ghost Cover  
80%

END CAP




**A**  
Aluminum



**T**  
Transparent

EXIT CABLE




**A**  
Cap Exit Left




**AB**  
In&Out Cap Exit



**B**  
Cap Exit Right



**C**  
Left Side Exit



**CD**  
In&Out Side Exit



**D**  
Right Side Exit



**E**  
Back Exit Left



**EF**  
Back In&Out Exit




**F**  
Back Exit Right


LED POSITION



**X**  
Symmetric




**Y**  
Asymmetric




**Z**  
Double  
Asymmetric


FIXING ELEMENTS




**M**  
Magnetic Fixing



**B**  
Double Sided Tape




**P**  
Adjustable Bracket



**C**  
Mounting Clip

Asymmetric Linear IP40




Lumen Output 3000K CRI > 90  
30W/m - Light Opal Cover - Finish Gray: 2300 lm/m

CODE  
LPAD- [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

POWER	LENGTH (cm)	COVER	END CAP	EXIT CABLE	LED POSITION	FIXING	FINISH	CCT
<b>LED POSITION X-Y</b>	004 007 010 013 016	LOP Light Opal Cover	A Aluminum	A Cap Exit Left	X Symmetric	M Magnetic Fixing	● 4 Black	● U 2200K
08 8W/m	019 022 025 028 031	OPL Opal Cover	T Transparent	AB In&Out Cap Exit	Y Asymmetric	B Double Sided Tape	● 3 Gray	● Q 2500K
12 12W/m	034 037 040 043 046	BLK Black Ghost Cover		B Cap Exit Right	Z Double Asymmetric	P Adjustable Bracket		● X 2700K CRI > 90
16 16W/m	049 052 055 058 061			C Left Side Exit		C Mounting Clip		● W 3000K CRI > 90
19 19W/m	064 067 070 073 076			CD In&Out Side Exit				● K 3500K CRI > 90
23 23W/m	079 082 085 088 091			D Right Side Exit				● D 4000K CRI > 90
<b>LED POSITION Z</b>	094 097 100 103 106			E Back Exit Left				
16 16W/m	109 112 115 118 121			EF Back In&Out Exit				
24 24W/m	124 127 130 133 136			F Back Exit Right				
30 30W/m	139 142 145 148 151							
	154 157 160 163 166							
	169 172 175 178 181							
	184 187 190 193 196							
	199 202 205 208 211							
	214 217 220 223 226							
	229 232 235 238 241							
	244 247 250 253 256							
	259 262 265 268 271							
	274 277 280 283 286							
	289 292 295 298							

Custom lengths upon request

FIXING

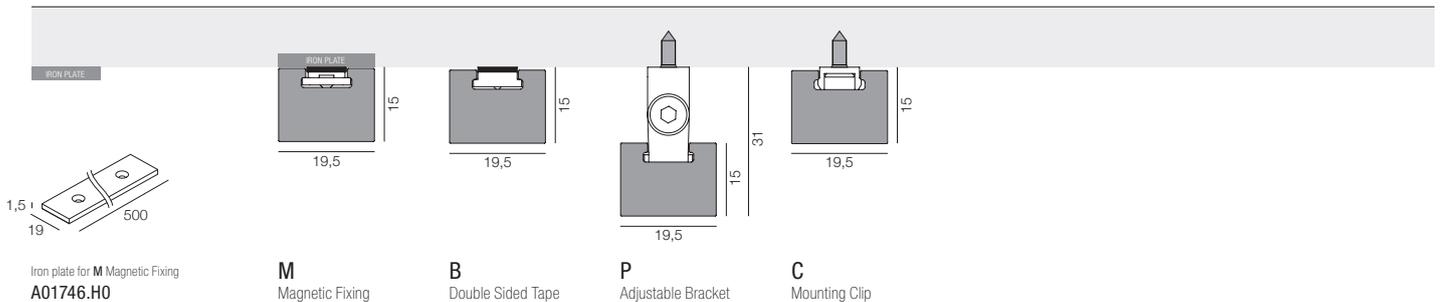

SUGGESTED DRIVERS (not included)

- 24Vdc CV70-F-24-N p. 708
- 24Vdc TW CV100-L-24-NL p. 707